

Solid-State Transformers, End to End

What the technology is, what it cannot yet do, who is actually testing one and at what voltage — and where Megmeet stands in all of it

Prepared for Jon Yang Role Senior Sales Manager — SST Solutions, Megmeet Start Wednesday 7 October 2026

Date 23 September 2026 Updated 24 September 2026 — OCP SST Specification v0.3 read first-hand

BOTTOM LINE UP FRONT

Each claim is argued in full in its own chapter; the source numbers let you check this summary without turning a page.

The contest for the hall edge — the medium-voltage block where utility power enters the data hall — is not being decided on efficiency. Every serious vendor claims 98.5%, and none publishes the boundary it measured across.¹ The buyers' own draft specification asks for less and says more: at least 98%, counting power-train losses only, between 50% and 100% load.⁸⁵ NVIDIA itself rates the transformer-rectifier unit and the solid-state transformer identically.² The contest is being decided instead on two things a buyer can actually check: **the service-voltage class a vendor has specified**, and **whether it has sold anything**. On that test the field turns upside down. The only solid-state transformer that any filing describes as supplying the market is specified at 10–13.8 kV and goes no higher.³ That cannot serve the 34.5 kV class at which large US campuses take their power.⁴ The Open Compute Project specification written by Google, Microsoft and NVIDIA now names that class as a product requirement: a 34.5 kV SST at 5 MW or 10 MW, beside a 13.8 kV one at 5 MW.⁸⁵ The most completely specified 34.5 kV-class design in the ledger is Heron's, and Heron has not shipped a unit.⁵ The next most complete is DG Matrix's, and DG Matrix is the one venture vendor actually shipping hardware — but what it ships today is a 480 V AC skid, rated 96–97% on its own datasheet; the medium-voltage unit its marketing rates at 15 MW is dated "2028+" in its own CFO deck.⁶ The only solid-state medium-voltage product an incumbent will take an order for is a UPS, not a transformer.⁷ And nobody, anywhere, holds a UL listing for the 800 V DC bus.¹

Megmeet is missing from that table on the one axis that defines it. Its dossier pins thirty-eight sources, and **none gives a kV figure for its solid-state transformer**; the converter is described only as taking grid high-voltage input and delivering 800 V DC.⁸ A text scan of four of the company's own filings found nothing either, and the most recent filing narrowed the claim, calling the product "under development" and its efficiency "expected".¹ What Megmeet does hold is the layer where money moves first: a published, shipping rack-and-sidecar chain, inside a power-products segment that grew 60.92% in the first half of 2026 and was the only one of the company's three largest segments to expand its gross margin.⁸

Analysis. The job is to sell that chain while the converter above it acquires three things it lacks: a voltage class, a safety listing, and a first article (the first production unit, built and inspected). The risk is that the block above the rack consolidates before the converter gets there.

Internal learning document. Not investment advice, and not a Megmeet position on anything. Every factual sentence ends in one numbered source; every block of inference is labelled **analysis**. Built unattended overnight on 23 September 2026 and rewritten that evening; the colophon records every assumption made without the reader in the room, and every change. Updated on 24 September 2026 from the OCP specification itself: every change is highlighted like this, and Appendix E lists them all.

— Contents

1. Part I — Read this first

- The one-page cheat sheet
- The numbers to know
- Five things that moved since the primer's 12 September watch-list
- The calendar to 7 October and the first ninety days

2. Part II — The technology in its entirety

- 1 · The term system
- 2 · Lineage and adjacent technologies
- 3 · Where an SST sits in NVIDIA's 800 V DC — new: 3.5, what the OCP specification says
- 4 · The value case, by perspective
- 5 · Limitations → mitigation → who → status

3. Part III — The market

- 6 · The pilot-and-test ledger, and the 34.5 kV argument in numbers
- 7 · Obstacles to adoption
- 8 · NVIDIA and Oracle: what their programmes specify, and what their engineers will ask

4. Part IV — Megmeet and the competition

- 9 · Megmeet's SST and 800 V DC chain — disclosed against undisclosed
- 10 · The SST competitor matrix
- 11 · The six business units, and the position in each
- 12 · Policy and supply chain

5. Part V — The sales layer (analysis throughout)

- 13 · The objections, and the strongest honest answer to each
- 14 · What not to say in the first month
- 15 · The ten week-one questions, ranked
- 16 · Everything this document could not determine

6. Appendix

- A · Glossary — the term system, alphabetical
- B · The flashcard deck
- C · Sources — the numbered references, and the sources by tier
- D · Colophon — pre-flight, assumptions, build
- E · What changed on 24 September — the OCP specification pass

How to read this document

This briefing builds on the repository's 20,000-word SST primer of 12 September 2026; it does not replace it. Each of chapters 1–5 summarises the matching primer chapter in about a page, points to the primer's figures by number, and then adds only what the primer lacks. Primer figures are referred to by number rather than redrawn. The fourteen new figures, numbered **M1–M14**, are drawn from one data file that also feeds the study companion, so the figures and the companion cannot disagree.

HOW SOURCES ARE MARKED

Every factual sentence ends in **one** small superscript number, placed after its final punctuation, like this.⁸ The number is a row in the numbered reference list, **Appendix C.0**, which gives the exact source: the dossier and its version, the primer chapter or figure, or the pages of NVIDIA's paper. Its colour tells you what kind of source it is before you look it up. No sentence draws on two sources.

 Primer	The repository's SST primer of 12 September 2026, which carries its own numbered first-party sources.
 Dossier	A Profiler company dossier at a stated version. Each dossier cites its own sources and records the provenance tier of each.
 Guidance	The page-referenced claims ledger for NVIDIA's August 2026 execution paper, held in the repository.
 Report	The Profiler competitive report on AIDC power conversion of 8 September 2026.
 Web	Research performed for this document on 23 September 2026. Every web source shares one number; the URLs are listed in Appendix C.
 Spec	The OCP <i>Solid State Transformer (SST) Specification</i> , Revision 0.3.0, and OCP's announcement of 11 August 2026 — supplied by the reader on 24 September 2026 and read in full. Numbers 85–89.
Highlight	Text added or corrected on 24 September 2026 is highlighted like this; text a correction replaces is struck through . Appendix E lists every change.
A Analysis	A reading of the evidence, not a source, so it has no number. A gold A marks a single sentence of inference, most often a statement that nobody publishes something. A longer passage of inference sits in a box labelled analysis .

Two rules hold throughout. No estimate is stated as a fact: when a figure comes from a vendor, a brokerage, a research house or a trade group, the same sentence names the source and its incentive. And where a vendor has not disclosed something, the cell reads **undisclosed** — **Megmeet's own SST included**.

Where the number sits in a table or list. In the wide reference tables of chapters 6, 7, 10 and 11, a row is one claim assembled from one source. It carries one number, at the end of the cell whose sentence it governs, and that number covers the rest of the row. Where a row draws on two sources, each sentence carries its own number and neither covers the other. A table cell or list item drawn wholly from one source likewise carries a single number at its end.

Two fixed vocabularies are used and never varied. Limitation status is **unsolved** **lab** **pilot** **product** **standardised**. Evidence tier is **announced** **lab demo** **factory test** **field pilot** **supplying** **undisclosed**.

ONE UNVERIFIED REPORT, BOXED ONCE AND NEVER USED AGAIN

The reader has heard, **unverified**, that Megmeet is in active communication with NVIDIA's and Oracle's engineering teams. That is hearsay. It steered the emphasis of chapter 8, which is longer and more specific than it would otherwise be. It is stated here once, as hearsay, and **nothing anywhere in this document is sourced to it**: no claim in chapter 8, or anywhere else, depends on it being true. The repository's report engine applies the same rule to field notes: they may steer scope, but they never appear as content.

PART I

Read this first

The four pages that matter if you read nothing else — the argument in one page, the numbers to memorise, what moved in the last eleven days, and the calendar.

I.1 The one-page cheat sheet

The technology, in five points

1. **What it is.** A solid-state transformer (SST) is a power-electronic converter that does a transformer's job; it is not a transformer. It rectifies medium-voltage (MV) AC from the utility through a stack of series-connected H-bridge cells, each a small, complete converter built from silicon-carbide (SiC) transistors; each cell chops its share of the DC into a 5–50 kHz square wave, passes it through a suitcase-sized medium-frequency transformer (MFT) that provides the isolation, and every cell's output is connected in parallel into one regulated 800 V DC bus.⁹
2. **Why it is small.** A transformer's core shrinks as the frequency it runs at rises: raise it from the grid's 60 Hz to 10 kHz and the core area falls by roughly 170×. That is why a 4 MW SST weighs about a fortieth of the 60 Hz transformer it replaces, which Infineon puts at 20 tonnes down to about 500 kg.¹⁰
3. **What it gives up.** It has the overload manners of a computer rather than of a block of iron. An oil-filled transformer carries 200% of its rated load for 30 minutes because its mass soaks up the heat; an SST's continuous rating sits near 1.0–1.2× nameplate (its rated output), and no vendor publishes an overload curve.¹¹ The buyers' draft specification now asks for one: 120% for 5 seconds at constant voltage, and 150% for 150 milliseconds at constant current for fault coordination, after which the unit may trip.⁸⁵
4. **Two decisions, not one.** Choosing 800 V DC and buying an SST are separate decisions: a customer can build an 800 V DC hall in 2027 with a transformer-rectifier unit (TRU), a conventional transformer feeding a rectifier, and never buy an SST.¹²
5. **NVIDIA's own sequence.** NVIDIA's execution paper does exactly that: it builds the first power block from a TRU and reserves the SST fed directly from medium voltage ("MV-direct") for the generation "toward 2029".²

The market, in five points

1. Only one covered vendor's filing describes an SST that converts medium voltage to 800 V DC as launched and supplying the market: Sungrow's EnerNeo, specified at 10 kV to 13.8 kV, 3 MW standard and 1.5–4.5 MW configurable, at 98.5%.³
2. The most completely specified product in the public record is Heron Link, at 34.5 kV and 4.2 MW with conversion efficiency above 98.5%. It has shipped nothing, and mass production is dated late 2027.⁵
3. The only solid-state medium-voltage product an incumbent will take an *order* for is ABB's HiPerGuard. It is a static MV UPS (uninterruptible power supply) whose output is medium-voltage AC, not a converter from medium voltage to 800 V DC.⁷
4. The strongest field evidence anywhere is a 1 MW research unit built at NC State (North Carolina State University) and validated on a real distribution feeder with the New York Power Authority (NYPA) and EPRI, the Electric Power Research Institute, announced in August 2026. It is a research unit, not a product, and the vendors' product claims run to 3–7.5 MVA (megavolt-amperes, the rating unit for AC equipment).¹
5. No vendor had completed UL certification, the US product-safety listing, for a data-centre SST as of the most recent analyst survey — and that survey comes from a house that sells the newsletter it appears in.¹

Megmeet, in five points

1. NVIDIA named Megmeet for the power of its GB200 NVL72 rack system, and it was the only mainland-China power vendor so named. Megmeet also appears on both of the vendor rosters NVIDIA published before it stopped naming vendors, the October 2025 ecosystem post and the August 2026 component tier, and its own H1 2026 interim report calls it “one of NVIDIA’s designated recommended data-centre power suppliers” — membership of a set, not a rank.⁸
2. Its shipping chain begins at three-phase 380–480 V AC. It runs through an 800 V HVDC sidecar (a cabinet beside the rack that converts AC to 800 V DC) delivering over 1 MW per rack; an 800 V / 570 kW side rack that integrates battery-backup and power-conversion functions; 33 kW and 110 kW power shelves; BBU (battery backup unit) and supercapacitor shelves; CRPS and M-CRPS units, the standard server power-supply form factors, up to 5.5 kW; and a point-of-load Power Brick.⁸
3. The SST sits at the top of that published chain and is the one item not built. It is described only as taking grid high-voltage input to 800 V DC at an expected efficiency above 98.5%, and **no service-voltage class is disclosed anywhere**.¹
4. The power-products group grew 60.92% to RMB 1.841 billion in the first half of 2026, and its gross margin expanded to 25.06%. It was the only one of the three largest segments to expand its margin; smart living and new-energy transport both contracted.⁸
5. Against that, headline attributable profit (profit belonging to the listed company’s shareholders) rose 45.21%, while profit excluding non-recurring items fell 16.13% and operating cash flow fell 84.62%.¹ Quote both profit numbers or neither.

ANALYSIS — THE ONE THING TO HOLD IN YOUR HEAD

Everything below the converter in Megmeet’s chain is a *socket*: a standardised form factor that is competed for again with every architecture generation. There the company is measurably competitive and growing. The converter is a *block*: something a customer specifies once for a campus and then buys for years. Megmeet is winning at the socket and is not yet in the contest for the block, because a block is specified by its input voltage class and Megmeet has not published one. That is a fact about disclosure, not a judgement of capability, and a specification can be published within a quarter. The only risk is that the block consolidates around two or three certified converters before Megmeet publishes.

I.2 The numbers to know

~~Twenty-three~~ **Twenty-seven** numbers, each with its source. If you memorise one table in this document, make it this one: most of these numbers answer a question an engineer will actually ask.

What	Number	Why it is the number, and what it is not
Power per mm ² of copper, 800 V DC against 415 V AC	+157%	NVIDIA’s conductor argument: the same copper carries more power at a higher voltage. The usual North American upgrade, to 480 V AC, buys only +16%; 1500 V DC would buy +382% but has no base of indoor-rated components in the US. ¹³
Current for one megawatt at 54 V DC	18.5 kA	The number that ended 54 V distribution. Conductors are sized by current, not power, and current is power divided by voltage: a megawatt at 54 V is 18.5 thousand amperes. ¹⁴
Core-area shrink, 60 Hz → 10 kHz	~170×	The transformer equation, $V \approx 4.44 \cdot f \cdot N \cdot B \cdot A$, says voltage is proportional to frequency (f) × turns (N) × flux density (B) × core area (A). Hold the voltage, turns and flux density fixed and the core area falls as the frequency rises. This is the whole reason an SST exists. ¹⁵

What	Number	Why it is the number, and what it is not
SST mass against its 60 Hz equivalent	~40× lighter	Infineon's own comparison: about 20 tonnes down to about 500 kg, and 14× smaller. Treat it as a supplier's figure, since Infineon sells silicon into the technology. ¹⁶
Cells per phase, 13.8 kV with 1.7 kV SiC	14–15	That is 42–45 cells across the three phases, and each is a complete converter with its own capacitor, MFT, gate drivers and sensors. ¹⁷
Cell multiplier, 13.8 kV → 34.5 kV	~2.5×	Cells, magnetics, gate drivers and control channels all scale by this factor. That is why a 13.8 kV SST is a different product from a 34.5 kV one, not a setting on the same product. ⁴
SST efficiency band, MV to DC	97–98.5%	Compare 99.0–99.5% for a good 60 Hz distribution transformer <i>alone</i> , before any rectifier. NVIDIA rates the MV rectifier and the SST identically. ¹⁸
Oil transformer overload	200% / 30 min	The largest engineering advantage the incumbent keeps. No first-party SST vendor publishes an overload curve at all. ¹¹
DC fault current rise rate Siemens measured	200 A/μs	The current climbs by 200 amperes every microsecond. At that rate, interrupting the discharge of the bus capacitors "was only possible with solid-state circuit breakers"; clearing with fuses took about 20 ms. ¹⁹
Insulation a 35 kV interface needs	~100 kV	"Three times the insulation", in TDK's assessment. NC State reaches 100 kV BIL (basic insulation level, the impulse voltage equipment must withstand) at over 99.5% transformer efficiency at 40 kHz. ²⁰
Largest independently validated SST on a live US feeder	1 MVA	At 13.2 kV, by NC State with NYPA and EPRI. Vendors quote products of 3–7.5 MVA; the gap between the two is the risk a buyer is being asked to carry. ²¹
ERCOT large-load queue against approvals	410 / 9.0 GW	At ERCOT, the Texas grid operator, about 410 GW of large loads were queued as of March 2026, against 9.0 GW approved to energise and an observed large-load peak of 3.9 GW. An SST shortens none of that queue. ⁴
US transformer lead time, standard units	128 weeks	144 weeks for generator step-up units, and worst cases near four years. This wait is what every SST is really sold against. ²²
Data-centre load dropped, 10 July 2024, Virginia	~1,500 MW	Six faults in 82 seconds. None of the load was disconnected by utility equipment; all of it tripped on customer-side protection. ²³
Data-centre load dropped, 22 July 2026, Dominion territory	3.8 GW	A second, larger event, on a fault that was cleared normally. It is not the 2024 event ; do not conflate the two. ¹
ERCOT NOGRR 282 ride-through test	2 s @ 0.85 pu	NOGRR 282 is the ERCOT rule change that sets it. Stay connected for 2 s at 0.85 pu (per unit: 85% of normal voltage) and for 150 ms below 0.35 pu; draw no more than 150% current; recover 90% within 2 s; survive six sags in 90 s. A converter meets it by design, but must prove it in a submitted model. ¹ The OCP specification plots ERCOT's curve with different corner points; chapter 16.3 sets the two side by side. ⁸⁶
NVIDIA's standardised DC power block	4.8 MW	A 6,000 A-class switchboard, parallel 1,250 A busways, and 4+1 catcher redundancy (four working blocks and a reserve that catches the load of a failed one) through a DC static transfer switch, in 20 MW deployment units. Every vendor has to answer how its product composes into this block. ²⁴
Rack power ladder, Gen 1 → Gen 4	145 → 1,000 kW	Power per rack across NVIDIA's four generations: 145 → 330 → 570 → about 1,000 kW. These figures are page-referenced in the repository's copy of the August 2026 paper and not confirmed on any public NVIDIA page. ²⁵
OCP SST ratings, SKU A · SKU B	5 · 5 or 10 MW	SKU A takes 13.8 kV at 5 MW; SKU B takes 34.5 kV at 5 MW or 10 MW; both deliver 800 V DC. ⁸⁵ SKU B is the class whose lab-demo, factory-test and field-pilot columns are empty in chapter 6. ^A
OCP efficiency floor	≥98%	Between 50% and 100% load, counting power-train losses only. ⁸⁵ It is below the 98.5% every vendor claims, and it is the first efficiency figure in this document that states its boundary. ^A
OCP overload setting	120% / 5 s	At constant voltage; plus 150% for 150 ms at constant current for fault coordination, after which the SST may trip. ⁸⁵ Five seconds, not thirty minutes: the thermal gap of chapter 5.1, written as a number. ^A

What	Number	Why it is the number, and what it is not
OCP basic insulation level, 34.5 kV SKU	≥150–200 kV	At least 110 kV for the 13.8 kV SKU. ⁸⁵ That is above the 95 kV chapter 1 gives for the 15 kV class, so ask which insulation class the buyer expects. ^A
Megmeet H1 2026 power-products growth	+60.92%	To RMB 1.841 billion. It was the only one of the three largest segments with an expanding gross margin, at 25.06%. ⁸
Megmeet H1 2026 profit excluding non-recurring items	–16.13%	Against headline attributable net profit of +45.21%. Always quote both; an analyst will have both. ¹
Megmeet FY2025 revenue	RMB 9.403bn	About USD 1.3 billion, not USD 13 billion . The Chinese unit 亿元 means one hundred million yuan, and machine translation renders it as “billion” with depressing regularity. ⁸
Sungrow EnerNeo class ceiling	13.8 kV	The only SST a filing describes as supplying the market, and it cannot serve a 35 kV-class campus. ³
Megmeet SST service-voltage class	undisclosed	The string “kV” appears in none of the 38 pinned dossier sources, and there was no hit for kV, 千伏 (kilovolt) or 中压 (medium voltage) in a text scan of four filings. ¹

I.3 Five things that moved since 12 September

The primer closed on 12 September 2026 with a dated watch-list, its §8.2, *What to watch, and when*.²⁶ Since then three company dossiers have landed on 19 September and one on 21 September, and three of the five changes below rest on web findings that postdate the primer.¹ These five are what a reader of the primer does not yet know.^A

Five things that moved between 12 and 23 September 2026

1	DG Matrix is not shipping the product the primer implies	It is the sharpest single correction in this brief. Anyone placing DG Matrix among the shipping medium-voltage vendors is placing the wrong product.
2	A new SST name exists and the primer does not carry it	Not a competitor. The reason to know the name is that a buyer may raise it, and the reason not to price it is that there is nothing to price.
3	NVIDIA opened a qualification programme and SSTs are not in it	The qualification path for an SST is unwritten. Which of the two mechanics a future MV category adopts is the biggest open commercial variable in the layer.
4	The ride-through case got a bigger event and a harder number	These are two different events, two years apart, and should not be conflated. Together they are why the SST's best US argument keeps getting stronger.
5	The policy fence moved twice and the two regimes do not line up	A 34.5 kV behind-the-meter SST is probably outside EO 14421 and inside the FCC list, which has no voltage threshold. A unidirectional rectifier-only architecture may sit outside both. The asymmetry is the finding.

Figure M1 — What moved between 12 and 23 September 2026. Boundary: movement measured against the primer as published on 12 September 2026. Sources per item: dossier revisions of 19 and 21 September, and two web findings verified 23 September. Composed for this briefing from `megmeet-sst-briefing-data.json` → `watchlistDelta`.

1 · DG Matrix is not shipping the product the primer implies

The primer places DG Matrix at “pilots” in the hall-edge layer and describes “a 12–34.5 kV AC MV skid to 400–1,500 V DC ... with paid pilots since Q1 2025”.²⁷ The dossier that landed on 19 September shows that the product actually on the market is the Interport Flex Series: a six-port **low-voltage** skid (equipment pre-assembled on one frame) whose own specification sheet rates the AC port at 400–480 V three-phase, the DC port at 300–850 V, and peak efficiency at 96–97%.⁶ The medium-voltage Interport Cell Series, the product that would compete with Heron and Amperesand at the hall edge, is dated “2028+” in the company’s own CFO deck.⁶ This is the sharpest single correction in this document: anyone who counts DG Matrix among the shipping medium-voltage vendors is counting the wrong product.

2 · A new SST name exists, and the primer does not carry it

The primer’s hall-edge chapter names eight SST developers — Sungrow, Heron, Sinexcel, DG Matrix, Amperesand, Siemens with Reinhausen, Enphase, and SolarEdge with Infineon — and Novos Power is not among them.²⁷ Novos Power is a San Diego company registered in California on 7 November 2025.²⁸ It has two to ten employees, no disclosed funding round, no SEC Form D filing, no patent or paper visible in any public database, and no named customer.²⁸ Its only named product is the Variable Airgap Solid State Transformer, and “variable airgap” is undefined on

the record: no company document, patent, application, paper or talk abstract explains what is varied, or why.²⁸ Its own channels state its input range three ways — 13–48 kV on the website, 35 kV in a July 2026 post — and 48 kV lies above the 38 kV ceiling of UL 2877, the standard that would govern a medium-voltage power supply.²⁸ It is not a competitor. The reason to know the name is that a buyer may raise it.

3 · NVIDIA opened a qualification programme, and SSTs are not in it

NVIDIA DSX Ready launched on 21 September 2026 to qualify partner products against the requirements of DSX, NVIDIA's reference design for AI factories.¹ At launch it covers exactly two categories: battery energy storage (BESS), with Hitachi Energy, LG Energy Solution and Tesla, and coolant distribution units (CDUs), with LG Electronics, LiquidStack and Vertiv.¹ The two categories qualify differently: BESS partners run the required tests and submit the data for NVIDIA to review and approve, while CDU partners use a self-qualification suite.¹ NVIDIA says further categories will follow, but it publishes no timeline and names no transformer, switchgear, rectifier or MV-conversion category.¹

ANALYSIS

There is no qualification path for a solid-state transformer yet, and which of the two mechanics a future MV category adopts is the largest open commercial variable in this layer. A test-data gate that NVIDIA adjudicates is a long, expensive, defensible moat; a self-qualification suite is a fast, cheap, crowded one. In a first meeting, the useful posture is not to ask when the category opens but to offer to help write it. The unwritten category is the opportunity, not the obstacle.

4 · The ride-through case got a bigger event and a harder number

Ride-through is a load's ability to stay connected through a voltage disturbance instead of tripping off, and the primer anchors it on the Virginia event of 10 July 2024.²⁹ A failed lightning arrester on a 230 kV line produced six faults in 82 seconds, and about 1,500 MW of data-centre load left the grid on customer-side protection: roughly 1,260 MW of it at the third voltage dip, and none of it disconnected by utility equipment.²⁹ A second, larger event is reported on 22 July 2026 in Dominion's territory, in which 3.8 GW of data-centre load dropped on a fault that was cleared normally.¹ Meanwhile ERCOT's NOGRR 282 has turned ride-through from a principle into a numeric acceptance test: stay connected for two seconds at 0.85 per unit (85% of normal voltage) and for 150 milliseconds below 0.35 per unit, draw no more than 150% of normal current, recover 90% of normal consumption within two seconds, and withstand six sags in 90 seconds.¹

DO NOT CONFLATE THESE TWO EVENTS

Analysis: they are two years apart and differ in size. The 2024 event is the one NERC's incident review documents and the primer reconstructs; the 2026 event is the one the current standards work is being written against. Anyone who works on large-load interconnection will correct a briefing that merges them into "the Virginia event".

5 · The policy fence moved twice, and the two regimes do not line up

The primer records the FCC's action of 28 July 2026 adding foreign-produced connected power inverters to the Covered List, the Federal Communications Commission's list of equipment it treats as a national-security risk.³⁰ Executive Order 14421, "Declaring a National Emergency to Secure the United States Bulk-Power System", followed on 26 August 2026.¹ It covers transformers, inverters, circuit breakers, generation turbines, reactors and battery storage, plus associated software, firmware and remote-access capability linked to a covered foreign entity — but only on transmission facilities rated 69 kV and above, with local distribution explicitly excluded.¹ An August 2026 FCC update then removed pure AC-to-DC rectifiers and off-grid inverters from the Covered List and added a safe harbour tied to 45X, the US advanced-manufacturing production tax credit.¹

ANALYSIS — THE ASYMMETRY IS THE FINDING

A 34.5 kV hall-edge SST installed behind the utility meter is probably *outside* Executive Order 14421, because it sits on local distribution below 69 kV. It is probably *inside* the FCC Covered List, which has no voltage threshold at all and captures any bidirectional AC ↔ DC device with remote communication. A rectifier-only architecture, which can pass power in one direction only, may sit outside both. The two regimes were written for different problems and do not fit together; for a hall-edge converter, the one that binds is the FCC list.

I.4 The calendar to day one, and the first ninety days

7 October 2026 is a Wednesday.¹ The market hands you four dated milestones inside the first ninety days, and none of them waits.^A

The run-in and the first ninety days — blue is yours, orange is the market's

2026-09-23 to 10-06	day -14	Read this brief, the primer and the OCP SST Specification v0.3 (obtained 24 September) — know its two SKUs by heart. Re-read the ten week-one questions and decide which three you ask on day one. [ANALYSIS]
2026-10-07	day one	Day one. Senior Sales Manager, SST Solutions. [ANALYSIS]
by 2026-10-31	day +24	Q3 2026 reports from Megmeet, Zhonhen and Sinexcel at the CSRC statutory deadline. Read Megmeet's for a service-voltage class, an order figure and any AI-data-centre revenue line — the three things the H1 interim did not contain. [REPORT 2026-09-08]
2026-11-01	day +25	EU funding restrictions on high-risk-country inverters begin their phase-in: projects assessed under the previous framework but may have to adopt extra cybersecurity measures or exclude high-risk suppliers. [WEB, verified 2026-09-23]
2026-Q4	day +30	First thirty days: get the answers to week-one questions 1-5 written down and shared. The class, the first-article date, the listing path, the FCC analysis and the lab ceiling are the five facts every subsequent conversation depends on. [ANALYSIS]
2026-12-24	day +78	DOE implementing regulations due under Executive Order 14421. Watch whether the 69 kV threshold and the local-distribution exclusion survive into the regulations — that is what decides whether a 34.5 kV hall-edge unit is inside or outside. [WEB, verified 2026-09-23]
2026-12-31	day +85	FERC deadline for NERC to file the new large-load reliability standards and registry criteria (Docket RD26-7-000; CLO-001/002/003). This is the day ride-through stops being guidance — and it is the SST's strongest US argument becoming enforceable. [PRIMER ch.6.3]
2027-01-05	day +90	Ninety days: a written position on where Megmeet competes in the hall edge and where it does not, a named target account list built on service-voltage class rather than on logo, and a one-page answer to each of the sixteen questions an NVIDIA power engineer and the twelve an OCI electrical engineer would ask. [ANALYSIS]
2027-Q1	day +95	Heron Power pilot units targeted; LITEON GPU-side mass production and first McKinney output; Flex separation of Cloud and Power Infrastructure. The quarter the US shelf capacity moves from announced to producing. [REPORT 2026-09-08] [DOSSIER heron-power v1]
2027-02	day +125	CATL's capital increase into Zhonhen's controlling holdco must close within six months of the 2026-08-14 signing. It decides whether the Panama TRU gets a balance sheet. [DOSSIER zhonhen v8]

Figure M2 — The run-in and the first ninety days. Boundary: external milestones are dated from their own sources, named in the row; internal actions are analysis. Day counts run from 7 October 2026 (Wednesday, verified). Composed for this briefing from megmeet-sst-briefing-data.json → calendar.

UPDATED 24 SEPTEMBER

THE ONE THING TO DO BEFORE DAY ONE — DONE

~~Obtain the **OCP LVDC Solid-State Transformer Specification v0.3** of July 2026. It is the vocabulary every counterparty in this market will use, more than eighty manufacturers are reported to be building to it, and it could not be retrieved for this briefing: opencompute.org, the site of the Open Compute Project (OCP) through which the hyperscalers publish open hardware specifications, returned HTTP 403 to every attempt from this environment, through two different tools.¹ Everything this document says about the specification's contents is therefore second-hand, and is flagged as such wherever it appears.~~

The reader obtained the specification and the announcement that published it on 24 September, and this briefing now reads both first-hand.⁸⁸ Its exact title is *Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform*, Revision 0.3.0, by Google, Microsoft and NVIDIA, effective 22 June 2026, with a first draft dated 20 May 2026.⁸⁸ OCP announced it on 11 August 2026.⁸⁹ The “July 2026” this briefing first carried came from second-hand reporting.^A So did “more than eighty manufacturers building to it”, which was wrong in a way that matters: the announcement counts more than 80 partners developing 800 VDC-compatible infrastructure — the architecture, not this specification.⁸⁹

Chapter 3.5 sets out what it says. The day-one task is now to read its twenty-four pages twice and to know its two SKUs by heart.

PART II

The technology in its entirety

Each chapter summarises the primer's corresponding chapter in a page, cites its figures by number, and then adds only what the primer does not carry.

1 The term system

Extends the primer's chapter 3 (the conversion, stage by stage) and chapter 9 (a forty-term glossary). The primer teaches the mechanism and lists the words. This chapter arranges the words into a **system**: seven families, grouped the way an engineer thinks about the machine, and for each term the one number that anchors it and a sentence a buyer's engineer would use it in. The families are *topology* (how the converter is arranged), *magnetics* (the transformers inside it), *devices* (the semiconductor switches), *protection* (how faults are stopped), *control* (how it behaves towards the grid), *grid interface* (where it meets the utility) and *standards* (how it gets approved). Every term also appears in the printed flashcard deck in Appendix B and in the study companion's spaced-repetition widget.

Follow the power through one unit first, and the topology terms fall into place:

1. Medium-voltage AC arrives at a stack of cells connected in series, so that each cell sees only a fraction of the line voltage.³¹
2. The front of each cell is an H-bridge; stacked in series they form a cascaded H-bridge (CHB) active front end, which turns the AC into DC on each cell's own DC link.³¹
3. Each cell's DC then feeds an isolated DC-DC converter, a dual active bridge (DAB) or a resonant CLLC stage, whose medium-frequency transformer (MFT) provides the galvanic isolation and the step-down.³¹
4. The DC outputs of every cell are connected in parallel into one stiff bus — series on the input and parallel on the output, which is what ISOP means.³¹

HOW TO USE THIS CHAPTER

Read the “number to remember” column first, all the way down. Those twenty-five numbers — one for every term except ISOP, which is a pattern rather than a quantity — separate someone who has read about SSTs from someone who can hold a technical conversation for twenty minutes. The definitions you can look up; the numbers you have to carry. The first three columns are sourced and each cell carries its own source number. The fourth column, *the sentence to say it in*, is **analysis throughout**: scripted language for a conversation, not a sourced record.

Topology

Term	What it is	The number to remember	The sentence to say it in (analysis)
SST — solid-state transformer	A power-electronic converter that provides a transformer's two functions — changing the voltage, and galvanic isolation, meaning no direct electrical path between input and output — through medium-frequency magnetics, with controllable AC-DC and DC-DC stages on either side. ³²	97–98.5% efficiency for MV-to-DC units; 99.0–99.5% for a good 60 Hz distribution transformer alone ¹⁸	"It is a converter, not a transformer. That is why it can also rectify, regulate and ride through — and why it has the overload manners of a computer rather than of a block of iron."

Term	What it is	The number to remember	The sentence to say it in (analysis)
ISOP — input-series, output-parallel	The connection pattern of an SST: cells stacked in series on the medium-voltage input, so each sees a fraction of the line voltage, and tied in parallel on the low-voltage output. ³¹	—	"Series on the MV side so each cell sees a fraction of the line; parallel on the LV side so they make one stiff bus."
CHB — cascaded H-bridge	A multilevel converter built from single-phase full bridges (H-bridges) connected in series. It is the standard way to face medium voltage with low-voltage semiconductors: stack enough cells and each carries only its share of the line. ¹⁷	13.8 kV needs 14–15 cells per phase with 1.7 kV devices; 34.5 kV needs about 2.5× as many ³³	"The cell count is the cost driver — each cell is a complete converter with its own capacitor, transformer, gate drivers and sensors."
DAB — dual active bridge	An isolated DC-DC converter with an active full bridge on each side of the transformer. Power flow is set by the phase shift between the two bridges' square waves, so it can run in either direction by construction. ³⁴	5–50 kHz switching ³⁵	"Both bridges are active, so power can go back to the grid. A passive rectifier can never do that."
CLLC / LLC	Resonant isolated DC-DC topologies. A resonant tank circuit (the inductors and capacitors that give the names their Ls and Cs) lets the switches turn on and off at zero voltage or zero current, which cuts switching loss; CLLC is the bidirectional form. ³⁵	NVIDIA specifies a 64:1 LLC with a matrix transformer to go from 800 V straight to 12 V inside the rack ¹²	"Resonant variants trade control range for soft switching and lower loss — and they tend to lose soft switching at light load."
MMC — modular multilevel converter	A multilevel converter built from half-bridge cells and used in HVDC (high-voltage DC) transmission; an alternative front end to the CHB at higher voltages. ³⁶	N+1 redundancy (one spare cell beyond those needed) raises a modular multilevel drive's MTBF (mean time between failures) by about 1.7× — the one independent redundancy number available ¹	"It is also where the SST's service model comes from: MV drives have been swapping cells in minutes for two decades."
TRU / MV rectifier	A conventional transformer stepping medium voltage down to low voltage, feeding a rectifier — diode, thyristor or active — to produce 800 V DC. ³⁷	NVIDIA's named near-term path, mature from electrolysis, rail and mining. NVIDIA rates the MV rectifier and the SST identically, at 98.5% or better and as large as 7.5 MVA ²	"NVIDIA's own paper calls the TRU a faster, proven path and reserves the SST for the next generation. Do not sell against the TRU on efficiency — they are rated the same."

Magnetics

Term	What it is	The number to remember	The sentence to say it in (analysis)
MFT — medium-frequency transformer	The kilohertz transformer inside each SST cell. It is small because the volt-seconds it must carry in each cycle fall as the frequency rises. It is demanding because it must hold medium-voltage insulation in that small volume while the fast-switched square waves of pulse-width modulation (PWM) stress it. ³⁸	Raising f from 60 Hz to 10 kHz shrinks core area by roughly 170×; a 4 MW unit weighs about a fortieth of its 60 Hz equivalent — Infineon's comparison is 20 tonnes to about 500 kg ¹⁰	"The magnetics are the part with the fewest suppliers: a low-loss nanocrystalline or ferrite core, MV insulation between windings, and a cooling path for the losses in a small volume."
BIL — basic insulation level	The lightning or switching impulse voltage a piece of equipment must withstand. It is set by the equipment class in the ANSI C84.1 standard, not by the vendor. ³⁹	15 kV class = 95 kV BIL; 25 kV class = 125 kV; 35 kV class = 150 kV ⁴	"The class sets the insulation, the BIL and the cell count — which is why a 13.8 kV SST is a different product from a 34.5 kV one."
PD — partial discharge	Small, localised electrical breakdown inside insulation. It does not bridge the electrodes, but it erodes the insulation over time, and the very fast voltage swings (high dv/dt) of wide-bandgap devices such as SiC drive it. ²⁰	A 35 kV interface needs roughly 100 kV of insulation — "three times", in TDK's assessment ²⁰	"Oak Ridge's point is that IEEE C62.82.1 was written for iron: localised overstress can occur even when terminal-level clamping looks adequate, and impulse tests may not reflect internal stress."

Devices

Term	What it is	The number to remember	The sentence to say it in (analysis)
SiC — silicon carbide	A wide-bandgap semiconductor: its wider energy gap lets a device block more voltage and switch faster than one made of silicon. SiC makes 1.2–3.3 kV MOSFETs (the transistor type used as the switch) practical at kilohertz switching, and it is the enabling device of the SST. ⁴⁰	Production classes 1.2, 1.7 and (from few suppliers) 3.3 kV; 6.5 and 10 kV exist as samples. SiC fell from over \$10/A (dollars per ampere of rating) in 2018 to \$2–3/A in 2025 ⁴⁰	"Moving from 1.7 kV to 3.3 kV devices roughly halves the cell count. That is why Amperesand builds on 3.3 kV parts, and why Wolfspeed's wafer capacity is a supply question for the whole layer."
Cosmic-ray derating	Atmospheric neutrons, produced by cosmic rays, can cause single-event burnout in power devices held at a high electric field, so each cell's DC-link voltage is set well below the device's rating. ⁴¹	The customary derating is about $0.55 \times$ device rating — the factor behind every cell-count figure in this brief ¹	"Burnout can occur at 50% or less of rated breakdown, so the derating is not conservatism. It is the design rule."
Fail-short	The property a die (a single semiconductor chip) in a series stack needs: when it fails it must keep conducting, so the stack stays up until the cell can be bypassed. ⁴²	Oak Ridge National Laboratory (ORNL) calls SiC fail-short in series stacks "an open research challenge" ⁴²	"Press-pack silicon fails short and keeps conducting for months. SiC's thermal stability, small die area and short short-circuit withstand make that hard — and it is the reliability question a careful buyer will actually ask."

Protection

Term	What it is	The number to remember	The sentence to say it in (analysis)
SSCB — solid-state circuit breaker	A semiconductor switch that interrupts DC fault current in microseconds. It is needed because DC has no natural current zero, the moment in every AC cycle that a mechanical contact exploits to put out its arc. ¹⁹	NVIDIA targets 125 A air-cooled and 1250 A liquid-cooled solid-state breakers, with moulded-case circuit breakers (MCCBs) as the Day-1 branch device ⁴³	"Siemens measured it: at a 200 A/us rise rate, capacitor-discharge interruption was only possible with solid-state breakers. Fuses peaked near 9.4 kA at about 3 ms."
HRMG / HRRG	High-resistance midpoint grounding and high-resistance return grounding: two of the four schemes under evaluation for connecting a two-wire 800 V DC bus to earth, alongside floating (no ground connection) and solid grounding. ⁴⁴ The OCP SST specification narrows its own output to two: an IT ground that is floating or high-resistance grounded, with detection and protection coordinated across the whole 800 V DC distribution, the detailed design still TBD. ⁸⁵	Four candidates; the paper leans towards HRMG ⁴⁴	"HRMG grounds both conductors symmetrically through a midpoint resistor network. The conductor-to-ground voltages stay balanced, fault detection works the same on both conductors, and it keeps operating after the first fault."
IMD / RCM	Insulation monitoring device and residual current monitor, two ways of detecting current leaking to ground. The facility zone uses IMD/IRM, which raises an alarm without shutting down; the rack interface zone prefers RCM for fast leakage detection. ⁴⁵	Two protection zones ⁴⁵	"The 125 A whip stays de-energised during install and removal — the mechanical lock must engage before an enable signal closes the contactor. That is EV-charging lineage, and they will expect you to know it."

Control

Term	What it is	The number to remember	The sentence to say it in (analysis)
AFE — active front end	A rectifier built from controlled switches rather than diodes. It draws sinusoidal current at unity power factor (current in step with voltage), can supply reactive power, and can be programmed to follow a ride-through curve. ⁴⁶	IEEE 519 limits total voltage distortion to 5% at the point of common coupling, with no individual harmonic above 3% ²³	"This is the SST's real US argument: the converter is the model. A transformer cannot be programmed to a ride-through curve; an active front end is the curve."
Grid-forming	A converter that sets the voltage and frequency rather than following them; this includes black start, restarting a network that has gone dead. ⁵	Heron claims IEEE 2800 and ERCOT NOGRR 282 compliance with under 1% ripple injected at MV ⁵	"Grid-forming is what turns a gigawatt load into a grid citizen rather than a grid problem."

Term	What it is	The number to remember	The sentence to say it in (analysis)
Ride-through	A load's ability to stay connected through a voltage or frequency disturbance instead of tripping. ²³	NOGRR 282: 2 s at 0.85 pu, 150 ms below 0.35 pu, no more than 150% current, 90% recovery within 2 s, six sags in 90 s ¹	"The root cause in Virginia in July 2024 was not the transformer. It was a disturbance-counting scheme and manual retransfer. An SST does not override downstream customer logic, and the cooling plant is usually not behind the critical bus."

Grid interface

Term	What it is	The number to remember	The sentence to say it in (analysis)
Service-voltage class	The equipment class, under the ANSI C84.1 standard, of the utility feed a site takes. It sets insulation, BIL and cell count — and therefore the product. ⁴⁷	12.47/13.2/13.8 kV = 15 kV class; 24.9 kV = 25 kV class; 34.5 kV = 35 kV class; gigawatt campuses tie in at 69-345 kV ⁴	"Large greenfield campuses in Texas and the Southeast trend to 34.5 kV because it moves more power on fewer, smaller feeders. Northern Virginia runs 34.5 kV distribution behind 230 kV ties."
PCC — point of common coupling	Where the customer's installation meets the utility's system, and where IEEE 519 harmonic limits are assessed. ⁴⁸	Limits tighten at higher voltage and at a lower short-circuit ratio, that is, on a weaker grid ⁴⁸	"For an SST-fed hall the PCC is usually the utility's MV side — so your harmonic signature is measured at 34.5 kV, not at the rack."
The 4.8 MW block	NVIDIA's standardised DC power block for a data hall: medium voltage in, a 6000 A-class DC switchboard, parallel 1250 A busways (enclosed bars that carry power along the row) and 4+1 catcher redundancy through a DC static transfer switch. ²⁴	4.8 MW per block, 20 MW deployment units of four scalable units ²⁴	"Every vendor now has to answer how it composes into 4.8 MW blocks and 1250 A busways with the tap-can interface. Paralleling, busway compatibility and catcher participation are the three concrete questions."

Standards

Term	What it is	The number to remember	The sentence to say it in (analysis)
UL 1741 / 347A / 2877	The US listing routes: the product-safety certifications a US inspector looks for. UL 1741, with supplements SA and SB, is the dominant path for inverters and converters; UL 347A and UL 2877 cover medium-voltage power conversion from 1 kV up to 38 kV. ¹ The OCP specification lists all three among its applicable standards, alongside UL 508C, UL 840, UL 1699 and UL 60730. ⁸⁷	1 kV to 38 kV is the listed medium-voltage range; 38 kV is the ceiling ¹	"Know your listing status precisely. The most quotable line from PCIM Europe 2026 is that there is no UL certification for the 800 VDC bus, and that this is a major gap."
IEC 62477-2	The international safety envelope for MV converters: 1 kV AC / 1.5 kV DC up to 36 kV AC / 54 kV DC. Edition 2 went to CDV (committee draft for vote), with voting closing 13 March 2026. ¹	36 kV AC ceiling ¹	"The envelope exists internationally. What does not exist anywhere is a listed data-centre SST."
DC arc flash	The explosive release of energy when an arc strikes on a DC system. NFPA 70E 2027, the US workplace electrical-safety standard, names the hazard, and no standard can yet calculate it: IEEE 1584-2018, the arc-flash calculation method, covers AC only. ⁴⁹	70E 2027 adds Article 310 with DC thresholds; the NFPA research project aims its model at 70E 2030 — a three-year gap ¹	"Operators will energise 800 V DC busway for years with no validated way to compute incident energy. The interim answer is conservative table-based PPE, de-energised-work rules and negotiation with the local inspector, the AHJ, project by project."
OCP LVDC SST Specification v0.3 OCP SST Specification, Rev. 0.3.0	The buyers' "black-box" product specification for a megawatt-class converter from medium-voltage AC to 800 V DC, by Google, Microsoft and NVIDIA, effective 22 June 2026. ⁸⁸ It specifies interfaces and behaviour — electrical, mechanical, thermal, environmental, control and communications — and leaves the engineering to the vendor. ⁸⁵ The specification the layer is being built to, from Microsoft, Google and NVIDIA, July 2026. More than 80 manufacturers are reported to be building to it.	v0.3, July 2026 SKU A: 13.8 kV, 5 MW. SKU B: 34.5 kV, 5 or 10 MW. Both 800 V DC unipolar out, at 98% or better. ⁸⁵	"This is the vocabulary your counterparties will use. Read it before the first meeting — and note that it could not be retrieved in this run, because opencompute.org refused every request." "Your own specification has a 34.5 kV SKU at 5 and 10 MW. Tell me which SKU this site needs, and I will tell you exactly where we stand against it."

ANALYSIS — THE THREE WORDS THAT DO THE MOST WORK

Class. Not “voltage”: *class*. A buyer’s engineer does not ask what voltage your converter takes; they ask what class, because the ANSI C84.1 class sets the insulation, the BIL, the cell count and therefore the product. Someone who says “we can do medium voltage” has told them nothing. Someone who says “35 kV class, 150 kV BIL” has told them everything.

Boundary. Every efficiency figure in this market is meaningless without one. When a vendor says 98.5%, the right response is: across which terminals, at what load point, and including auxiliaries and cooling or not? Nobody publishes the answer, so the first vendor who does gains an advantage that costs it nothing.

Undisclosed. Used precisely, the word is a credibility asset, not a weakness. It says: I know exactly what my company has and has not published, and I will not guess in front of you. Used loosely, as a way of dodging a question, it does the opposite.

2 Lineage and adjacent technologies

Extends the primer's chapter 2 (the AC hall), chapter 4 (SST against transformer-rectifier unit), figure 3 (the three chains) and figure 8 (published chain losses). The primer draws the comparison the industry argues about: SST against TRU. It does not draw the **full adjacency**: the six devices that can sit at the hall edge, scored on the nine attributes a buyer's engineer actually works through, plus the four lineages an SST inherits from. Confusing any two of these six is the most common error in the market, and three of the four things most often called SSTs are not SSTs.

Lineage and adjacency — the SST against what it descends from

	Efficiency	Footprint	Overload / inrush	Fault behaviour	Isolation	Controllability	Cost	Maturity	Standards path
Line-frequency transformer (LFT)	best	poor	best	best	best	poor	best	best	best
LFT + rectifier (TRU / MV rectifier)	strong	fair	strong	strong	best	fair	strong	strong	strong
MV UPS (solid-state)	strong	fair	fair	good	best	strong	fair	good	good
Hybrid LFT + solid-state breaker	strong	fair	best	strong	best	fair	strong	good	good
MVDC collection	good	good	fair	fair	good	strong	fair	fair	fair
SST (ISOP CHB + DAB)	good	best	poor	fair	strong	best	poor	poor	poor

Figure M3 — The SST against what it descends from and competes with. Boundary: cells are qualitative five-step rankings (poor / fair / good / strong / best), which are **analysis** and not measurement; the numbers behind each row are in the notes below and carry their own tiers. Sequential single-hue ramp per the dataviz rule for ordinal data. Composed from megmeet-sst-briefing-data.json → lineage.

2.1 What each row actually is

Device	What it is, and the number that characterises it
Line-frequency transformer	The incumbent: a conventional transformer running at the grid's own frequency, 60 Hz in the US (hence line-frequency transformer, LFT). It is 99.0–99.5% efficient at rated load, carries 200% overload for 30 minutes on thermal mass alone, and has a 128–210 week lead time, which is the reason this entire category exists. ⁵⁰
LFT + rectifier (TRU)	A conventional transformer stepping medium voltage down to low voltage and feeding a multi-pulse or active rectifier. NVIDIA rates it at 98.5% or better, calls it “a faster and proven path for quick 800 VDC deployment”, credits it with “strong fault isolation” and “improved compatibility with existing 34.5 kV utility distribution”, and calls it “highly practical for approximately 5 MW-class power block deployment”. ⁵¹ It inherits the transformer's thermal mass, which is the largest engineering advantage it holds over an SST.
MV UPS (solid-state)	Not an SST. ABB's HiPerGuard is 2.5 MW per unit, hard-paralleled up to 25 MW, at 4.16–34.5 kV and 98% efficiency. It holds UL 1741, was the first of its kind to achieve UL 9540 (the US safety standard for energy-storage systems), and its installed base includes Applied Digital's 400 MW and 300 MW North Dakota campuses. Its output is medium-voltage AC. ⁷
Hybrid LFT + SSCB	The cheapest way to buy most of the SST's fault performance without the converter: keep the iron and add a semiconductor breaker. ABB's SACE Infinitus is the first IEC-certified solid-state circuit breaker. ⁷
MVDC collection	Medium-voltage DC collection is the adjacent lineage most SST vendors actually come from, along with MV drives, STATCOMs and traction. ABB's own SST heritage runs back to its 2012 PETT railway unit (a power-electronic traction transformer) at 15 kV, 1.2 MW and about 96%. ⁷
SST (ISOP CHB + DAB)	97–98.5% from MV to DC, about one third the weight and volume of an LFT-based chain according to ORNL, a continuous rating near 1.0–1.2× nameplate with no published overload curve, and a price that trade reporting puts at roughly twice a conventional transformer's. ⁵²

2.2 What an SST borrows, and from where

From	What comes across
MV drives	The cascaded-H-bridge topology itself, and the cell-swap service model, with two decades of field history behind it. GE Vernova markets its MM7 modular multilevel drive on modularity that “can increase MTBF as well as decrease MTTR” (mean time to repair), with modules “light enough for one or two people to swap a faulty unit with a spare within a few minutes”. The swap-in-minutes claim every SST vendor makes is therefore not new to SSTs. ¹
STATCOMs	From the static synchronous compensator, the converter utilities use to support grid voltage, comes the four-quadrant active front end: unity power factor, reactive support, and the grid-forming control that lets a converter behave as a grid citizen rather than as a passive load. ⁵³
Traction	The original SST. ABB’s PETT railway unit of 2012 ran at 15 kV, 1.2 MW and about 96%: the first megawatt-class SST anybody energised, fourteen years before this market existed. ⁷
EV charging	The interlocked-connector discipline NVIDIA specifies for the 125 A DC whip (the flexible cable that feeds a rack). The whip is hardwired to the tap can on the busway behind a normally-open contactor; the mechanical lock must engage before an enable signal closes the contactor, and on release the contactor opens before the connector unlocks. ⁴⁵
PV and storage inverters	The manufacturing base. Sungrow, SolarEdge, Enphase and Power Electronics are all inverter houses reaching up into the hall edge. ³ That is why the FCC’s inverter action lands on this layer and not on the rack. ¹

THREE THINGS ROUTINELY CALLED SSTs THAT ARE NOT

Zhonhen’s **Panama** is a transformer-rectifier lineup: medium-voltage switchgear, phase-shifting transformers and rectifier cabinets in one prefabricated skid.⁵⁴ NVIDIA’s own paper names the Panama Architecture as a TRU implementation — as an *architecture*, not as a company.⁵⁴ ABB’s **HiPerGuard** is a static medium-voltage UPS whose output is MV AC.⁷ Vertiv’s **PowerDirect** is a rack and sidecar DC product at 400–900 kW, and Vertiv’s own release contains no reference to medium voltage or SSTs.⁵⁵ Getting any of these wrong in front of an engineer costs more credibility than admitting you do not know a number.

3 Where an SST sits in NVIDIA's 800 V DC

Extends the primer's chapter 2.2 (what NVIDIA specified), chapter 4.2 (the staging) and figure 7 (the timeline). The primer covers the argument of NVIDIA's October 2025 white paper and the three options in its August 2026 execution paper. This chapter adds the **engineering detail an SST vendor is actually measured against** — the protection zones, the grounding candidates, the breaker ratings, the block arithmetic — and the two things NVIDIA has done since the primer closed.

3.1 The rack roadmap, which is what forces everything else

NVLink, NVIDIA's GPU-to-GPU interconnect, wants more GPUs within reach of its copper links, so more GPUs go into each rack and rack power climbs, generation by generation.²⁵

- **Gen 1** (GB200/GB300): 145 kW on 54 V DC, with 60 A whips in an 8-to-make-6 feed (eight feeds, any six of which carry the load).²⁵
- **Gen 2** (Vera Rubin NVL72): 330 kW with both AC and DC input options — the hinge generation.²⁵
- **Gen 3**: 570 kW with 100% liquid-cooled shelves and 800 V DC into the power supplies.²⁵
- **Gen 4**: roughly 1 MW-class, with native 800 V DC inside the rack.²⁵

Distribution at 54 V DC physically runs out of road along the way, because one megawatt at 54 V is 18.5 kA.¹⁴

PROVENANCE CAUTION ON THE RACK LADDER

The 145 / 330 / 570 / ~1,000 kW ladder is page-referenced to the repository's copy of NVIDIA's August 2026 execution paper.²⁵ A dedicated search of NVIDIA's public pages on 23 September 2026 could not confirm those four figures on any NVIDIA-hosted page.¹ Those pages bound the same ladder more loosely, as "racks ranging from 100 kW to over 1 MW" and "1 MW IT racks starting in 2027".¹ When you quote NVIDIA publicly, use NVIDIA's public language; keep the four-step ladder for your own model.

3.2 The four architectures — and they are not a ladder

NVIDIA's core claim is that its four deployment forms are "not sequential requirements, but flexible deployment options", chosen by facility, timeline and density.⁵⁶ Read the table as a menu, not a staircase.

Form	Date	What it is, in the numbers a vendor must answer to
AC baseline	now	480 V AC to the rack over 100 A AC whips, 4-to-make-3 rack feed redundancy, and conversion to low-voltage DC inside the rack. Fully supported and not going away. ⁵⁷
Option A — Power Rack	production Q3 2026	A 19-inch power rack beside the compute racks. In: twelve 100 A AC whips at 415–480 V three-phase, with no neutral. Inside: air-cooled shelves of six 18.3 kW power supplies, each holding 1,200 J of stored energy to shape the current it draws. Out: about 660 kW of 800 V DC over 125 A interlocked DC whips, point to point, with no busbar. An optional BBU of four 20 kW units gives 80 kW for 60 s, N+1. Certified under UL 62368-1. Explicitly a bridge. ⁵⁸
Option B — Power Center	deployment as soon as Q3 2027	End-of-row DC power centres adjustable to 2 MW and deployed at about 1.6 MW in four-to-make-three, so that three of the four carry the load: a 4.8 MW effective cluster. Power is distributed over overhead 800 V DC busway with 1,250 A feeders and 125 A tap cans (the boxes that tap a rack's feed off the busway), and an MCCB clears a fault at the 125 A branch in up to about 20 ms. It retrofits without modifying upstream AC electrical rooms. ⁵⁹

Form	Date	What it is, in the numbers a vendor must answer to
Option C — DC Power Block	initial implementation now, as a transformer-rectifier block; the August 2026 rollout statement puts the full DC power block at 2027+	Blocks of about 4.8 MW at the hall edge: MV AC in, a step-down transformer, low-voltage rectification, a 6,000 A-class DC switchboard, and parallel 1,250 A busways on the same tap-can interface as Option B. Redundancy is 4+1 catcher through a DC static transfer switch — “DC needs no phase synchronization, so source transfer is simpler than AC”. It scales in 20 MW deployment units of four scalable units, shipped as modular outdoor containerised packages. ²⁴
Option C next-gen	toward 2029	34.5 kV AC converted directly to 800 V DC, in blocks scaling towards about 10 MW. The named enabler is the mature SST, “expected to be launched toward 2029”, and explicitly “beyond the deployment horizons of current 800 VDC architectures”. ⁶⁰

THE SENTENCE THAT SETTLES THE TRU-VERSUS-SST QUESTION

NVIDIA's own paper credits the transformer-rectifier unit with mature transformer technology, strong fault isolation, improved compatibility with existing 34.5 kV utility distribution, and being “highly practical for approximately 5 MW-class power block deployment”.² It names three TRU families, one of which is the Panama Architecture.² It describes the SST as “approximately 15 kV-class today”, against the 34.5 kV that hyperscale campuses take, and dates the next generation toward 2029.² The OCP specification that NVIDIA co-authored with Google and Microsoft already defines a 34.5 kV SST, at 5 MW or 10 MW.⁸⁵ The buyers have written the requirement down years ahead of the product NVIDIA dates toward 2029.^A The industry's own reference document says the near-term block is a TRU, so selling against the TRU means selling against the customer's own architecture paper.^A

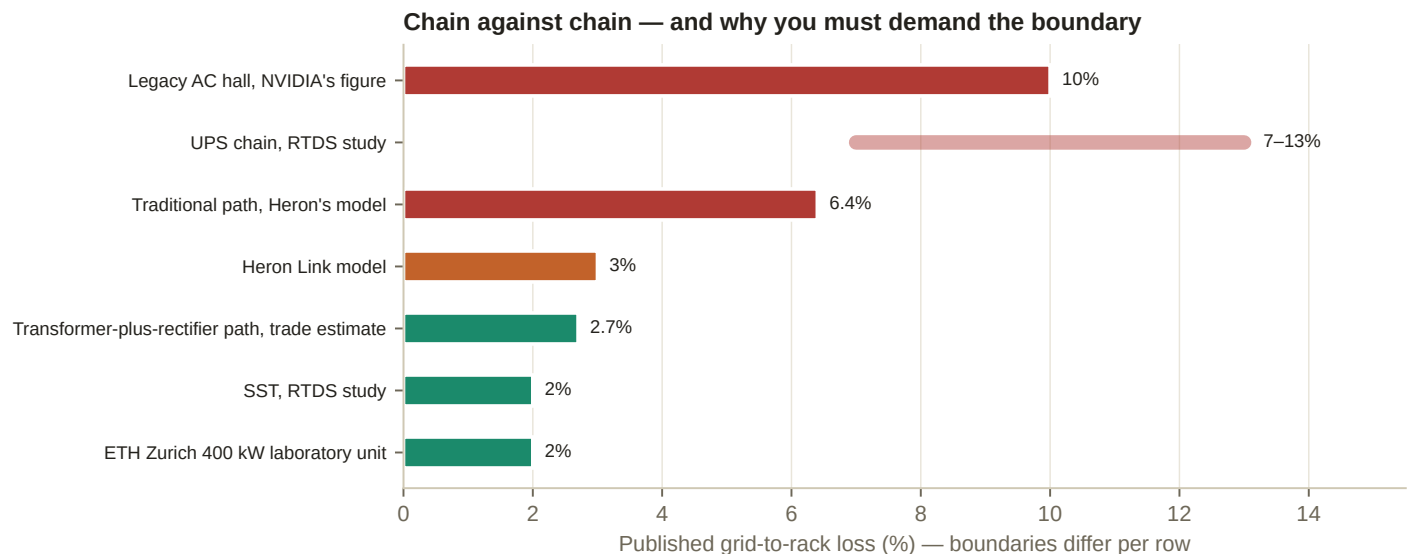


Figure M4 — Chain against chain, and why you must demand the boundary. Boundary: each bar is a *published* grid-to-rack loss figure and the rows are not like-for-like — every author states a different boundary and load point, and several state neither. That incomparability is the finding, not a defect in the chart; a range is drawn where the source publishes one. Composed from megmeet-sst-briefing-data.json → chains.publishedChains, where every row carries its own source tag.⁶¹

The practical consequence is the question to have ready when a buyer's engineer quotes a competitor's efficiency at you: **which boundary, and which load point?**⁶² The chart shows why in one picture. The bottom rows are single-converter numbers and the top rows are whole-chain numbers, so they are not the same quantity at all — and the spread between the two kinds is wider than the margin any vendor claims over any other.^A

3.3 The protection engineering — the genuinely new vocabulary

This part of the August 2026 paper was in nobody's curriculum, and it will be the vocabulary of every engineering conversation about 800 V DC for the next two years.

Topic	What is specified
AC against DC faults	DC current flows continuously and never crosses zero, so it needs faster interruption, current limiting and arc-fault detection — but fault energy is “often lower in converter-limited systems”. A series arc (one in line with the load, as at a loose connector) can sustain itself on DC and is harder to extinguish, which makes connector design and arc detection critical. The counter-intuitive teaching point is that DC's weakness comes with a structural strength: a converter-fed system can limit fault current <i>at the source</i> , which a stiff AC utility feed cannot. ⁶³
Grounding	800 V DC distribution is two-wire: positive and return. Four grounding candidates are under evaluation — high-resistance midpoint, high-resistance return, floating and solid — and the paper leans towards HRMG, which “provides a more uniform fault monitoring, earlier fault identification, and improved system reliability while maintaining low ground-fault current levels”. The final choice is deferred to system-level studies. ⁴⁴
Protection zones	There are two. The Facility Distribution Zone runs from the TRU or SST output to the tap-can input. It is qualified-personnel territory, uses continuous insulation monitoring that raises an alarm without shutting down, and on a high overcurrent it coordinates a fast shutdown of the source through the rectifiers. The Rack Interface Zone runs from the tap can to the compute rack. It sees the most human interaction, prefers residual current monitoring, and keeps the 125 A whip de-energised while it is being installed or removed. ⁴⁵
Breakers	Two target ratings for solid-state breakers: 125 A air-cooled for the shelves that convert 800 V to 54 V, and 1,250 A, likely liquid-cooled, for future racks that take 800 V DC natively. The sober counterweight is that MCCBs remain the primary Day-1 branch device , because they are available, their supply chain exists and certifiers know them. ⁶⁴ Siemens data at a 200 A/μs rise rate: a fuse peaks near 9.4 kA at about 3 ms; a thermal-magnetic breaker peaks near 5.7 kA and clears in 6–7 ms; a hybrid breaker clears in about 2.5 ms; and an SSCB holds the current near zero within about 1 ms. These values are read from a chart image, so treat them as right in shape rather than datasheet-exact. ⁶⁵
Power smoothing	Smoothing moves to the rack side: “localized peak shaving, power smoothing, and slew rate control using minimal energy storage (e.g., electrolytic capacitors) deployed within or near the compute racks”, with facility or behind-the-meter storage only as a <i>may</i> . The 1,200 J in each Option A power supply is that philosophy in hardware. ⁶⁶ For Vera Rubin, NVIDIA publishes 400 J of capacitor storage per GPU, “6× more rack-level energy storage” than the prior generation, Intelligent Power Smoothing, and dynamic power steering. ¹
Certification	System-level requirements come first: “equipment certification alone is insufficient”. The work runs across eight workstreams, from power quality to end-to-end stability criteria, with UL Solutions, and leans on existing frameworks rather than writing new standards. It also explicitly enables the AHJ (the authority having jurisdiction — the local inspector who approves the build) through installation practices, inspection guidelines, commissioning procedures and training. ⁶⁷

WHAT THE AUGUST 2026 PAPER DOES NOT SAY — THE GUARDRAIL LIST

- No efficiency percentages, no copper-savings figures and no TCO numbers. Those live in the October 2025 paper and in vendor decks, and a business-value study is explicitly named as future work. ⁶⁸
- No vendor names for power equipment beyond a Siemens chart credit and UL Solutions: **Panama is named as an architecture, not as a company, and the paper puts nobody on a roster.** ⁶⁸
- No efficiency comparison between TRU and SST, only qualitative attributes. ⁶⁸
- No retirement of AC, which coexists “for the foreseeable future”. ⁶⁸

3.4 What changed after the primer closed

Two things, both material and both dated after 12 September. First, NVIDIA DSX Ready launched on 21 September 2026 as the first published qualification programme for partner power products. ¹ It covers battery storage and coolant distribution units only, with no MV-conversion category and no timeline for one. ¹ Second, the first published NVIDIA-aligned end-to-end electrical reference design for Vera Rubin — from Siemens with NVIDIA, Fluence and nVent, dated 1 June 2026 — is built on a nominal 34.5 kV utility connection through medium-voltage distribution and modular low-voltage power blocks. ¹ It is sized at 136 MW facility and 100 MW IT capacity and delivered as pre-engineered,

prefabricated, factory-tested MV and LV skids, UL-aligned and targeting Tier III concurrent maintainability (the Uptime Institute tier at which any component can be maintained without shutting down the load).¹ That release mentions neither 800 V DC nor solid-state transformers anywhere.¹

ANALYSIS

Read together, the two make the near-term shape of the market clear. The first industrialised NVIDIA-aligned electrical design is a conventional building that steps MV AC down to LV AC, and the first qualification programme has no box for your product. Both are commercial openings rather than closures: a factory-tested skid is exactly where an SST wants to land, and Tier III concurrent maintainability is a hard constraint that rewards a converter with a real bypass story. But anyone who walks in claiming NVIDIA's architecture requires an SST today will be corrected by NVIDIA's own reference design.

NEW SECTION · 24 SEPTEMBER 2026

3.5 What the OCP specification actually says

Read first-hand from the twenty-four pages of Revision 0.3.0 and from the OCP announcement that published it. It is the one document in this briefing written by the buyers rather than about them, so it is the one to know best.^A

The specification defines a medium-voltage SST as a megawatt-scale power-electronic converter which, coupled with energy storage, can function as a medium-voltage UPS, replacing the 50/60 Hz transformer, the rectifier units and, as the architecture requires, the energy storage.⁸⁵ It expects silicon-carbide or emerging gallium-nitride switches with medium- or high-frequency magnetics, and treats the product as five components: the power conversion itself; MV input switchgear with line filters and surge suppression; DC output switchgear and terminations; firmware, control and communications; and auxiliary power, which comes up first and stays up whatever state the unit is in.⁸⁵ It is written as a black box: it fixes interfaces and behaviour, and leaves vendors to fill the box.⁸⁵

Requirement	What Revision 0.3.0 says	What it asks of a vendor (analysis)
Input and rating	SKU A: 13.8 kV $\pm 10\%$, 5 MW. SKU B: 34.5 kV $\pm 10\%$, 5 MW or 10 MW. Both three-phase, three-wire plus protective earth, 57–63 Hz, riding a rate of change of frequency of up to 5 Hz/s. ⁸⁵	Two products, exactly as chapter 6.2 argues. The 5 MW floor sits above Sungrow's 3 MW standard unit and Heron's 4.2 MW data-centre configuration.
Power quality	Input power factor above 0.99 at full load, above 0.98 at 20% load or more and above 0.95 below 20%; harmonics to IEEE 519, IEC 61800-3 Category C4, and IEC 61000-6-2 and 6-4. ⁸⁵	Corrects chapter 8's question 15: there <i>is</i> an OCP harmonic requirement. Bring an IEEE 519 assessment.
Fault withstand and insulation	18–40 kA symmetrical (about 104 kA asymmetrical) at 13.8 kV and 25–50 kA (about 130 kA) at 34.5 kV, duration TBD; basic insulation level at least 110 kV at 13.8 kV and 150–200 kV at 34.5 kV. ⁸⁵	The 13.8 kV figure is above the 95 kV of the ANSI 15 kV class, so a unit insulated to the standard class may fall short. Ask.
DC output	800 V DC unipolar from one output port; $\pm 0.5\%$ switching ripple, $\pm 1\%$ static regulation from 0 to 100% load, $\pm 3\%$ dynamic regulation (load step TBD); IT ground floating or high-resistance grounded. ⁸⁵	Settles two-wire against ± 400 V at the SST's own terminals. It does not settle HRMG against HRRG.
Overload	Recommended settings: 150% in constant-current mode for 150 ms for fault-protection coordination, after which the SST may trip; and 120% in constant-voltage mode for 5 s. ⁸⁵	The first written overload number in this market, and it is a buyer's. Five seconds, not the thirty minutes oil gives.
DC-link capacitance	At most 10 mF per 4 MW of output, provisional until the full DC system has been simulated and tested. ⁸⁵	Caps the capacitor energy one unit can pour into a DC fault — the problem Siemens measured in chapter 5.2.
Efficiency	At least 98% between 50% and 100% utilisation, counting power-train losses only. ⁸⁵	Below the 98.5% every vendor claims, but on a stated boundary. Quote Megmeet's expected 98.5% on this boundary or not at all.
Envelope and siting	10–20 ft long, 8 ft deep and 8.5 ft high, the height set by road transport and on-site service; used indoors in environmentally conditioned grey space, or outdoors. ⁸⁵	A trailer-sized skid outside the white space. The MV-in-the-data-hall obstacle of chapter 7 is designed around, not solved.

Requirement	What Revision 0.3.0 says	What it asks of a vendor (analysis)
Environment and structure	NEMA 3R outdoor rating; a design life of 15+ years; −30 °C to 40 °C, with the supplier to give a derating above 40 °C; corrosion class C5; 95% humidity, non-condensing; up to 1,000 m; seismic design category D (S_{DS} 1.193 g); 48 psf ground snow; 120 mph wind; transport to US DOT FMCSA rules. ⁸⁷	The 15-year life is the “15+ years” chapter 7 found second-hand, now confirmed as the buyers’ own target — against the 30–40 years an oil transformer is financed on.
Auxiliary power and communications	Control and telemetry powered from an external 480 V AC supply backed by the site UPS, plus an internal source; semiconductor drive and cooling powered internally; communications over Modbus TCP/IP. ⁸⁵	Answers chapter 8’s question 13. Modbus TCP/IP carries no authentication of its own, so question 16, on cyber, stays open.
Voltage ride-through	Takes ERCOT’s NOGRR 282 curve as its illustration, after surveying Fingrid, ITIC, IEEE 1547, IEEE 2800 and MISO. Full output between 0.9 and 1.1 pu indefinitely and up to 1.2 pu; in the first low-voltage band the SST may draw no more than nominal input current yet still carries full load; in the deeper band it draws no input current and the coupled storage carries 100%; on recovery it resumes with no change of state. ⁸⁶	Ride-through is written as an SST-plus-storage product. The specification says outright that it is not trying to set a consensus on low-voltage ride-through.
Frequency and ramp	Continuous from 58.8 to 61.2 Hz, and 299 s from 57.0 to 58.8 Hz and from 61.2 to 61.8 Hz, in its MISO example; load acceptance and rejection of about 20–50 MW per minute from the utility, with the genset and renewable ramps TBD. ⁸⁶	The storage is sized against the utility ramp, so the ramp is a storage-sizing input, not a grid detail.
State machine	Six states: off, standby, precharged, on, fault and warning. A permanent failure keeps the unit out of normal operation until an operator validates it, services it, resets it and re-provisions it. ⁸⁷	The service model in writing: a person in the loop for every permanent fault. It is the bypass and Tier III question of chapter 8.
Compliance	NFPA 70, 70E and 72; UL 347A, 508C, 840, 1741, 2877, 60730 and 1699; IEEE 693, 1584, 1547, 2030.2, 519, 1662, 1676, 1100, 1653.6 and 3007.3. ⁸⁷	No UL 9540, although the product is meant to be coupled with storage, and no IEC 62477-2.
Redundancy (appendix, for reference only)	Examples of block redundancy with a catcher, distributed redundancy, N+C block redundancy on busway or on a switchboard, and N redundancy. ⁸⁷	The catcher is the idea behind NVIDIA’s 4+1 block in chapter 3.2; a paralleling story has to fit all four.

What Revision 0.3.0 leaves open

The draft is candid about its gaps. The grounding section is two headings with no text, and the output voltage bands for redundancy, the conveyance losses to the rack, the energy-management coordination, the verification load profiles and the ramp rates for gensets and renewables are all TBD or promised for later versions.⁸⁶ The short-circuit duration and the size of the dynamic load step are TBD as well.⁸⁵ Its appendix of example architectures is for reference only and is not normative.⁸⁸

The announcement, and what it adds

OCP published the specification on 11 August 2026 in a post by Jason Adrian of Google, Microsoft, and Mike Tu of NVIDIA.⁸⁹ It frames 800 V DC as an addition to AC rather than a replacement, and gives two deployment options: a DC sidecar, with rack-level AC-to-800 V DC rectifiers, as the fastest near-term path; and direct MV AC to 800 V DC through transformer-rectifiers or SST skids as the long-term architecture, with one 800 V DC backbone for battery storage, DC UPS and future DC microgrids.⁸⁹ It says the three are working with UL Solutions, NFPA, IEEE and IEC on the certifications, and that more than 80 partners are developing 800 V DC-compatible infrastructure.⁸⁹ The copy supplied lost a few lines at each page break under a cookie banner, including most of the description of the sidecar option, and nothing here is taken from those gaps.^A

ANALYSIS — WHAT REVISION 0.3.0 CHANGES FOR MEGMEET

- **The class question now has a buyer’s answer.** Two SKUs, so the week-one question stops being “what class?” and becomes “which SKU, or both?” (chapter 15, question 1).
- **The product the buyers describe is an SST coupled with storage** — a medium-voltage UPS, by the specification’s own definition. Megmeet’s published chain already puts BESS and backup shelves beside the SST (chapter 9.2), so offering the two as one SKU is what the specification invites.

- **The efficiency claim has to move to the specification's boundary.** Megmeet's expected 98.5% clears the 98% floor only if it is measured on power-train losses between 50% and 100% load, and the filings do not say what it is measured on.
- **Revision 0.3.0 is a first draft, and OCP is asking for involvement.** Commenting on Revision 0.4 is the cheapest seat at the table there is (chapter 15, question 9).

4 The value case, by perspective

Extends the primer's chapter 2.2 (NVIDIA's copper and staging argument) and chapter 7 (the vendors' positions). The primer gives one perspective properly, NVIDIA's, and describes the vendors' positions. It does not give the **buyer-side view from ten different chairs**. Each of these players wants something different from 800 V DC, and only three of them want an SST specifically. Where a player has said something, the cell is sourced. Where it has not, the cell is labelled analysis, because inferring a position and then quoting it back as if the player had said it is exactly the error this document exists to prevent.

Player	What 800 V DC buys them	What an SST adds over a TRU	What they would need to see
NVIDIA [PRIMER ch.2.2] [GUIDANCE nvidia-800vdc p7, p21-23]	800 V DC carries 157% more power through the same copper than 415 V AC. The rack roadmap is what forces it: NVLink pulls GPUs into copper reach, density climbs, and 54 V distribution runs out of road.	Stage elimination, footprint and control — not efficiency. NVIDIA rates the MV rectifier and the SST identically at 98.5% or better.	ANALYSIS: a qualification category that does not exist yet. DSX Ready launched on 21 September 2026 covering BESS and CDUs only. The first thing an SST vendor can usefully offer NVIDIA is help writing the category.
Oracle / OCI [WEB, verified 2026-09-23] [WEB, verified 2026-09-23]	Nothing published. Oracle has said nothing about 800 V DC, DC distribution, MV conversion or solid-state transformers anywhere in its own material. Its published power content is capacitance, advanced energy storage, hardware GPU ramping and software ramp control.	ANALYSIS: unknown, because the question has never been put publicly. The one place the conversation opens naturally is Project Jupiter — up to 2.45 GW of solid-oxide fuel cells, which are DC-native, consolidated into one microgrid campus.	ANALYSIS: someone else's operating hours. With no internal reference and no published spec, the first question a cautious operator asks is who has one running and at what scale.
The other hyperscalers [WEB, verified 2026-09-23]	Microsoft states that solid-state transformers are "the next step" in its full-stack power transformation after Mt Diablo — no vendor, no site, no kV, no MW, no date. Google, Microsoft and NVIDIA jointly own the OCP specification work.	ANALYSIS: the ability to standardise a block across a fleet. A hyperscaler that specifies one converter for every campus buys schedule certainty, not efficiency.	ANALYSIS: a second source. No hyperscaler will single-source the hall edge, and today no two vendors offer an interchangeable 34.5 kV-class unit.
Neoclouds [WEB, verified 2026-09-23]	NVIDIA names CoreWeave, Lambda, Nebius, Oracle Cloud Infrastructure and Together AI among providers "designing for 800-volt data centers" — NVIDIA's characterisation of them, not their own statements.	ANALYSIS: time to power. A neocloud's constraint is energisation date, and a 24-week lead time against 46-48 for a conventional lineup is the argument that actually lands.	ANALYSIS: a bankable warranty and a spares depot. Neither exists for any MV SST today — only one vendor in the whole research pass publishes a warranty term at all.
Colo developers and landlords [DOSSIER sungrow v9] [DOSSIER heron-power v1]	ANALYSIS: floor area and time to revenue. The SST's published footprint claims are the most concrete thing on offer — Sungrow claims 312 kW/m ² and one-third to one-fifth of a conventional lineup. Heron claims a 70% smaller footprint and an outdoor NEMA 3R siting that removes the electrical room.	ANALYSIS: deletion of the electrical room. For a landlord, converted floor is leasable floor.	ANALYSIS: a tenant who will sign for it. Landlords do not specify converters; anchor tenants do.
Utilities [PRIMER ch.6.3, ch.6.5]	Their published concern is not conversion, it is load behaviour. ERCOT NOGRR 282 turned ride-through into a numeric acceptance test; NERC Project 2026-02 will make interconnection modelling, operational data and protection coordination mandatory, with a FERC filing deadline of 31 December 2026.	ANALYSIS: one authoritative dynamic model of the grid interface instead of a composite of transformer, UPS, VFDs and protection. The converter is the model.	ANALYSIS: an approved-equipment-list entry, which nobody has. This is why every announced US pilot sits behind a customer-owned MV substation.
EPCs [DOSSIER heron-power v1] [WEB, verified 2026-09-23]	ANALYSIS: nothing in the published record. EPCs do not publish architecture positions.	ANALYSIS: fewer trades and a shorter commissioning window. Heron's model puts labour at \$0.08M per MW against \$0.73M for the conventional lineup — a vendor model with vendor-chosen boundaries, and neither figure audited on a delivered US project.	ANALYSIS: a factory-tested skid they can set and terminate. The one published NVIDIA-aligned reference design is delivered as pre-engineered, prefabricated, factory-tested MV and LV skids.
Incumbent hall vendors [REPORT 2026-09-08] [DOSSIER ge-vernova v6]	All six declared an 800 V DC position in October 2025. ABB has the only orderable solid-state MV product and it is a UPS; Eaton published a reference architecture and bought SST intellectual property; Schneider sells the reference design; Vertiv declared engineering readiness; GE Vernova publishes reference designs and holds a hyperscaler commitment tied to a specification milestone; Hitachi Energy holds the transformer calendar.	ANALYSIS: replacement content for a shrinking centralised UPS franchise. The architecture moves conversion toward the rack and takes the UPS with it.	ANALYSIS: evidence that the SST market is larger than the UPS revenue it cannibalises. GE Vernova has priced the prize at 2-3x revenue per gigawatt; Infineon sizes the whole SST slice at just above \$1bn of a \$15bn-plus transformer market by 2030.
Silicon [DOSSIER infineon v1] [DOSSIER vicor v2]	Infineon publishes a dedicated SST application page and is one of fourteen named silicon providers; its AI data-centre revenue went from EUR 250m in FY2024 to above EUR 700m in FY2025 and is guided above EUR 1.6bn for FY2026. Vicor sells no block at all and turned its bus-converter patents into royalties worth a fifth of a quarter's revenue.	ANALYSIS: content per megawatt. Every cell is a bill of materials, and a 34.5 kV unit has about 2.5 times the cells of a 13.8 kV one.	ANALYSIS: volume visibility. Infineon's own market sizing is the most sober in the industry precisely because it has no reason to inflate a slice it already supplies.
Megmeet [DOSSIER megmeet v7]	Its published position is the rack and the sidecar: an 800 V HVDC sidecar converting 380-480 VAC at over 1 MW per rack, a 570 kW side rack, 33 kW and 110 kW shelves, BBU and supercapacitor shelves, CRPS and M-CRPS to 5.5 kW, and a Power Brick. The SST is in the published chain and is marked under development.	ANALYSIS: the move from component vendor to infrastructure vendor. Everything below the converter is a socket someone re-competes; the converter is a block someone specifies.	ANALYSIS: a published service-voltage class, and then a listed unit. Until the first exists, Megmeet is not in the hall-edge comparison at all; until the second exists, nobody in the layer is.

Figure M5 — What 800 V DC buys each player, what an SST adds on top of a transformer-rectifier unit, and what each would need to see. Boundary: the first two columns are sourced where a player has published a position and labelled *analysis* where inferred; the third column is analysis throughout. Composed from megmeet-sst-briefing-data.json → perspectives, where each row carries its own tier tag.

4.1 The four positions worth reading twice

NVIDIA does not buy power. It sets the architecture and lets the ecosystem carry the risk, which is why its published documents give ratings, interfaces and dates but no commercial terms. What it needs from an SST vendor is help writing a qualification category that does not yet exist.¹

Oracle has published nothing on power conversion at all.¹ Its single engineering post on AI power is a one-minute read whose entire power content is “capacitance, advanced energy storage solutions, hardware-accelerated GPU ramping techniques, and software-based ramp control algorithms” — no voltage, no rack density, no topology.¹ Chapter 8 takes this apart properly. The point here is that with OCI (Oracle Cloud Infrastructure) you are not responding to a specification; you are helping to write one.

Utilities are not asking about conversion. Their published concern is how a large load *behaves* on the grid, and that concern has become numeric.¹ ERCOT’s NOGRR 282 is now an acceptance test, and NERC (the North American Electric Reliability Corporation) Project 2026-02 will make interconnection modelling, operational data and protection coordination mandatory, against a deadline of 31 December 2026 for filing with FERC, the federal regulator.¹ This is the one place where an SST has a structural advantage that nothing else in the chain can match: the converter *is* the model, because its behaviour is set by its control software and can be specified in advance.²³

The incumbents are all running the same hedge. All six declared an 800 V DC position in October 2025, and every one of them has deferred the converter while buying or building the equipment around it.⁶⁹

THE DEFENSIBLE PITCH IN THE UNITED STATES

SSTs are marketed against transformer lead times, but the market’s binding constraints are the interconnection queue and the lack of a validated method for calculating DC arc flash — and an SST relieves neither. The argument that actually holds is the regulatory one: **an SST is the only architecture that makes a gigawatt-class load a modelable, dispatchable, ride-through-compliant grid citizen, at the exact moment FERC and NERC are making that mandatory.** Everything else in the story is either years out or belongs to the transformer-rectifier unit, which NVIDIA itself calls the faster and proven path.⁷⁰

5 Limitations → mitigation → who → status

Extends the primer’s chapter 5 (overload, faults, insulation, reliability, cost and standards) and chapter 6 (grid, supply chain, ride-through, codes, sites, economics). The primer describes the limitations. It does not name, for each one, **who is actually working on it and how far they have got** — and for a whole family of them the answer is “nobody”. That is the finding of this chapter and of chapter 7, which takes the same table and reads it as an adoption question rather than an engineering one.

The status word comes from the fixed set and is assigned from evidence, not from vendor language:

- **unsolved** — no named owner, or no published method;
- **lab** — an identified research programme;
- **pilot** — a named party is doing it at scale but not shipping;
- **product** — it can be bought, even if only as a vendor claim;
- **standardised** — a standards body or regulator owns it.

The full twenty-five-row table is in chapter 7. This chapter takes the four limitations intrinsic to the converter: the ones a customer’s engineer raises in the first meeting, in the order they raise them.

5.1 Overload — the thermal reservoir an SST does not have

A liquid-filled 60 Hz transformer tolerates 200% load for 30 minutes because tonnes of oil and iron take time to heat up.¹¹ A data hall uses that margin every time a row steps from idle to full load, and every time a fault draws current until a breaker clears.¹¹ An SST's silicon has only microseconds of thermal margin, so its surge tolerance shrinks to brief transients and its continuous rating sits near 1.0–1.2× nameplate.¹¹ **No first-party SST vendor publishes an overload curve**, and no named body owns the gap as a published rating.¹¹ **The OCP specification now writes a recommended rating down: 120% for 5 seconds in constant-voltage mode, and 150% for 150 milliseconds in constant-current mode for fault coordination.**⁸⁵ That is a buyer's requirement rather than a vendor's curve, so the status below does not change, but it gives every vendor a number to publish against.^A Status: **unsolved** as a rating, **product** as a design property vendors assert. In practice, an SST is sized for its peak load rather than its average, and storage on the DC bus — which NVIDIA already requires for the GPUs' power swings — becomes part of the overload strategy rather than an option.¹¹

5.2 Fault handling — the deepest structural difference

ORNL's 2026 review is blunt: MV-SSTs “exhibit limited fault withstand capability ... unlike conventional transformers, which benefit from substantial thermal and magnetic fault tolerance, MV-SSTs must actively detect, limit, and interrupt fault currents within timescales compatible with semiconductor safe-operating limits”.¹⁹ On the DC side the problem is the energy stored in capacitors, because every converter on a shared bus has them and they all discharge into a fault.¹⁹ Siemens measured it: on a common 800 V bus, a fault in one load drew discharge current from the capacitors of all three healthy loads, clearing with fuses took about 20 ms, and interruption at a 200 A/μs rise rate “was only possible with solid-state circuit breakers; other devices were not able to react fast enough”.¹⁹ **The OCP specification caps each SST's output DC-link capacitance at 10 mF per 4 MW, provisionally, pending full system simulation and testing.**⁸⁵ Here the owners are named: ABB claims the first fully IEC-certified solid-state circuit breaker in production, and Eaton has published a 1,500 V / 1,250 A hybrid SSCB.¹ Status: **product** at the device, **pilot** for the complete balance of system of an 800 V DC hall.

5.3 Insulation and partial discharge — the hardest hardware problem

The medium-frequency transformer must hold medium-voltage insulation in a small volume while being driven by PWM square waves with very fast edges.²⁰ TDK calls this “the biggest challenge”, needing “three times the insulation”: a 35 kV interface requires roughly 100 kV.²⁰ ORNL identifies two distinct stresses, and the first is insulation coordination under IEEE C62.82.1, a framework written for iron, where “localized insulation overstress may occur even when terminal-level clamping appears adequate”.²⁰ The second is stress the converter itself creates: fast dv/dt makes the sharing of voltage across the insulation “dominated by parasitic capacitances” and drives partial discharge that shortens insulation life.²⁰ There is a named academic owner: a Georgia Tech group identifies a mismatch between the protective levels of metal-oxide varistors (the surge arresters that clamp overvoltage) and the insulation strength of an SST, and “the incompatibility of standard impulse test on SST protective structures” — in plain terms, **the standard BIL test does not apply cleanly to an SST.**¹ Status: **lab**.

5.4 Reliability — thousands of devices and one unsolved failure mode

A 4 MW SST contains on the order of a hundred or more SiC modules plus their capacitors, drivers and sensors, and it must deliver a 20-year life at 99.9–99.999% availability.⁴² The modular design gives inherent redundancy, and vendors design for it: Heron tolerates two cell failures per phase, with bypass in less than one AC cycle.⁵ But ORNL flags a problem specific to wide-bandgap devices: a series-stacked design needs a failed die to **fail short and keep conducting for months**; press-pack silicon achieves this, while SiC's thermal stability, small die area and short short-

circuit withstand make it “an open research challenge”.⁴² Status: **pilot** at the system, **unsolved** at the die. And there is arithmetic nobody advertises: the one independent figure available says N+1 redundancy raises a modular multilevel drive's MTBF by a factor of about 1.7 — a long way from the step change that “five nines” (99.999% availability) implies.¹

5.5 What the converter does better than iron

There are five genuine advantages. It is worth being precise about them, because three of the five are commonly overstated.

- **Grid behaviour.** The active front end on the MV side draws sinusoidal current at unity power factor, can supply reactive power, and can ride through voltage dips to a specified curve. NVIDIA asks for ride-through “surpassing current ITIC curve expectations by referencing ERCOT VRT requirements” — that is, better than the industry's standard voltage-tolerance envelope for IT equipment (the ITIC curve), judged against ERCOT's voltage ride-through rules — and a transformer can do none of this.⁵³ The OCP specification writes that request down, plotting ERCOT's curve and assigning the SST a behaviour in each band (chapter 3.5).⁸⁶
- **A native DC bus.** Batteries couple to it directly with no extra DC-DC stage, and so can DC-coupled solar or fuel cells.⁵³
- **Bidirectionality.** Two active bridges around the MFT mean stored energy can flow back to the grid for demand response.⁵³
- **Footprint and speed.** ORNL cites one third the weight and volume of an LFT-based chain, and Infineon's own comparison is about 40× lighter, 14× smaller and roughly 50% faster to construct.⁵³ Sungrow claims 312 kW/m², a vendor figure for its own product.³ Heron claims a 70% smaller footprint and a 24-week lead time against 46–48 weeks for a conventional lineup, on its own model.⁵ Note that this is not the 128–210-week transformer lead time quoted elsewhere in this document: that figure is for the utility service transformer, and Heron is comparing against the secondary lineup.⁵
- **Partial-load efficiency.** Idle cells can switch off, and a real-time-simulator study put an SST at roughly 2% loss, nearly flat across load, against 7–13% for a UPS chain.⁶²

THE EFFICIENCY SENTENCE TO GET RIGHT

NVIDIA's headline numbers — up to 5% better end-to-end efficiency, 45% less copper, 85% more power through the same conductor, up to 70% lower maintenance and up to 30% lower TCO (total cost of ownership) — are claims for the **800 V DC architecture against a legacy AC hall**, whose end-to-end efficiency NVIDIA puts at “less than 90%”.⁶² They are not claims for the SST against the MV rectifier, which NVIDIA rates at the same 98.5%.⁶² In NVIDIA's own framing, the SST's advantages are stage elimination, footprint and control.⁶² Saying “an SST is 5% more efficient” is the single most common error in this market, and it is wrong in two ways at once: the 5% belongs to the architecture, not the converter, and it is measured against an AC hall, not against a rectifier.^A

PART III

The market

Who is actually testing one and at what voltage; what is blocking adoption and who owns each blockage; and what the two engineering programmes that matter most have actually committed to.

6 The pilot-and-test ledger, and the 34.5 kV argument in numbers

Extends the primer's chapter 6.1 (the US voltage ladder), chapter 7 (the players) and figure 11. The primer explains why the service class sets the product. This chapter answers the question it leaves open: **who has actually shown what, at which class, and how far the evidence goes.** It then makes the 34.5 kV argument in cells, magnetics and BIL rather than in adjectives.

6.1 The ledger

The table lists every vendor with a published medium-voltage position, sorted by the highest class claimed; n/d means not disclosed. The evidence tier comes from the strongest public evidence located, not from the vendor's own language. The last column says exactly what the class rests on, because the difference between a datasheet, a product page and a range on a marketing banner is the whole subject of this chapter.

Vendor	MV class	Rating	Output	Evidence	What the class rests on
Novos Power	13–48 kV	10 MW	400–1,500 V DC (claimed)	announced	stated three ways (13-48 kV on the site, 35 kV in a July 2026 post); 48 kV is above the 38 kV ceiling of UL 2877 ²⁸
Siemens + Reinhausen	34.5–36 kV	n/d	800 V DC	announced	"up to 36 kV" — 36 kV is the IEC class containing 34.5 kV; no MW rating, no date ¹
Delta Electronics	6.6–35 kV	n/d	800 V DC	supplying	widest published incumbent range; Delta states "dozens of units in Asia, customer pilots underway in the US" — a vendor claim relayed by trade press ¹
Heron Power	34.5 kV	4.2 MW	800 V DC	announced	34.5 kV is the headline spec, not a range; 4.2 MW is the data-centre configuration (5 MW is the solar/storage configuration of the same platform) ⁵
SolarEdge	13.8–34.5 kV	5 MW	800–1,500 V DC	announced	2–5 MW modular, Infineon SiC, >99% claimed; customer testing targeted 2027 ¹
Enphase	13.8–34.5 kV	1.25 MW	800 V (±400 V) DC	announced	distributed architecture: 342 × 4 kW modules built on gallium nitride (GaN), another wide-bandgap semiconductor, per 1.25 MW rack; demo late 2026, pilots 2027, volume 2028 ¹
DG Matrix (Cell-MV, roadmap)	12–34.5 kV	15 MW	800 V DC — the MV unit is unshipped	announced	the 15 MW is a marketing rating for an unshipped unit; the CFO deck dates the multi-port MV SST to "2028+" ⁶
ABB (HiPerGuard, MV UPS)	4.16–34.5 kV	2.5 MW	MEDIUM-VOLTAGE AC — a UPS, not a converter	supplying	output is medium-voltage AC — it is a UPS, not an MV-to-800 V DC converter. Plotted because it is the only orderable solid-state MV product ⁷
Hyosung	22.9 kV	1.05 MW	undisclosed	lab demo	22.9 kV is a Korean class; the nearest US analogue is 24.9 kV, not 34.5 kV ¹
Eaton (Resilient Power)	12.47–15 kV	2 MW	800 V DC (trade press)	announced	"2 MW, 15 kV class" is trade-press only; eaton.com returned HTTP 503 to the research pass, so no vendor spec sheet was obtained ¹
Sungrow (EnerNeo)	10–13.8 kV	3 MW	800 V DC	supplying	the only unit a filing describes as supplying the market — and it stops at 13.8 kV ³
ETH Zurich (research)	13.2 kV	0.4 MW	800 V DC	lab demo	400 kW at 98% measured — the best-instrumented efficiency figure in the set, and it is a laboratory unit ¹

Vendor	MV class	Rating	Output	Evidence	What the class rests on
NC State / NYPA / EPRI (1 MVA research unit)	13.2 kV	1 MW	13.2 kV AC feeder, 1 MVA	field pilot	the only independently validated megawatt-class SST on a live US distribution feeder: 15 kV SiC MOSFETs, three days supplying an EV load, reactive power injected, energised more than ten times, June 2026 ²¹
Alderbuck Energy	12 kV	n/d	800 V DC	factory test	the only named US AI-compute site with a disclosed class attached to an SST — San Diego Supercomputer Center, host utility San Diego Gas & Electric (SDG&E), funded by the California Energy Commission (CEC). It is 12 kV ¹
Zhonhen (Panama)	10 kV	2.5 MW	240 / 400 / 800 V DC	supplying	a transformer-rectifier architecture, not an SST; plotted because buyers place it against SSTs ⁷¹
JST Power Equipment	10 kV	2.4 MW	800 V DC	factory test	10 kV is a China class ¹
EPFL + Navitas	3.3 kV	0.25 MW	800 V DC → 12 V	lab demo	3.3 kV is not a US service class at all ¹
Megmeet	undisclosed	—	—	undisclosed	The SST is described only as "grid HV input to 800 V DC". Across the 38 sources pinned in dossier v7 the string "kV" does not appear once. ⁸ A four-filing text scan of the FY2025 annual report, the H1 2026 interim and two investor-relations records found zero hits for kV, 千伏 or 中压. ¹
Amperesand	undisclosed	—	—	undisclosed	No kV figure appears anywhere on the company's own site — "configurable MV AC and LV DC" only. The 10-34.5 kV figure in September 2026 reporting is third-party. Job postings cite "medium-voltage (5 kV to 36 kV) systems". ⁷²
GE Vernova	undisclosed	—	—	undisclosed	Reference designs cite 13.8 kV AC to 800 V DC at the perimeter, but no SST product class, rating or date is published. A first delivery to an unnamed hyperscaler was stated for fall 2026. ⁷³
Hitachi Energy	undisclosed	—	—	undisclosed	No SST product is named at all. Its engineers are separately quoted cautioning that compact 34.5 kV designs present significant design challenges. ⁷⁴
Vertiv	undisclosed	—	—	undisclosed	34.5 kV to 800 V DC at 3-5 MW is stated by an engineering director as a goal, not a product. The shipping sidecar is 400-900 kW and is not an SST. ¹
Schneider Electric	undisclosed	—	—	undisclosed	No MV SST programme was found in the pinned sources. The 1.2 MW/rack 800 V DC sidecar was still a prototype at GTC 2026 with no commercial date. ⁷⁵
Sinexcel	undisclosed	—	—	undisclosed	Management states four times that the AIDC critical-power products are samples in development with formal sales not yet realised; the string "800V" does not appear in its 212-page interim. ⁷⁶

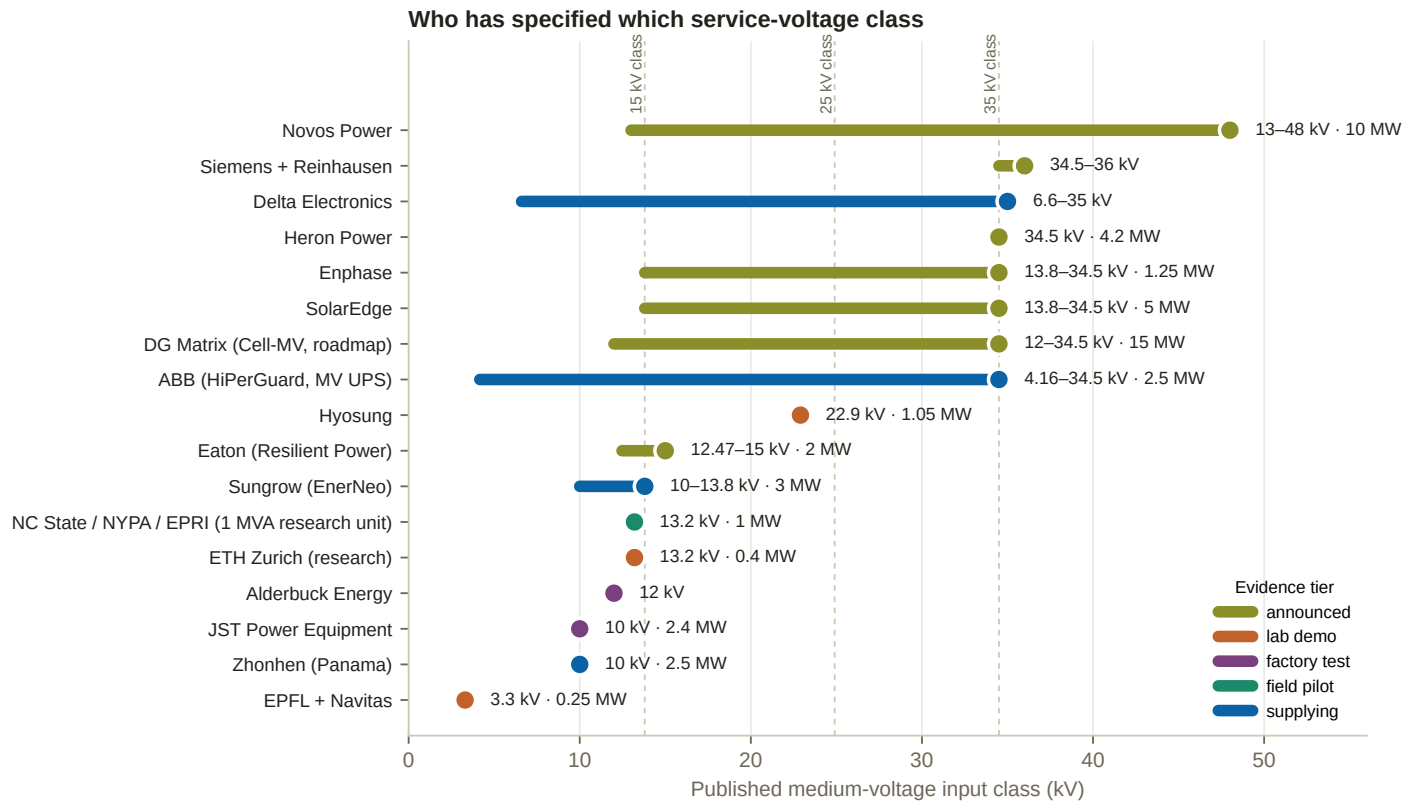


Figure M6 — Who has specified which service-voltage class. Boundary: the bar spans a published range and the marker sits on a single published class; colour is evidence tier, from the fixed six-word vocabulary. Vendors with no published class are not plotted and are listed in the table above. Composed from megmeet-sst-briefing-data.json → classLedger, where every row carries its own source tag.

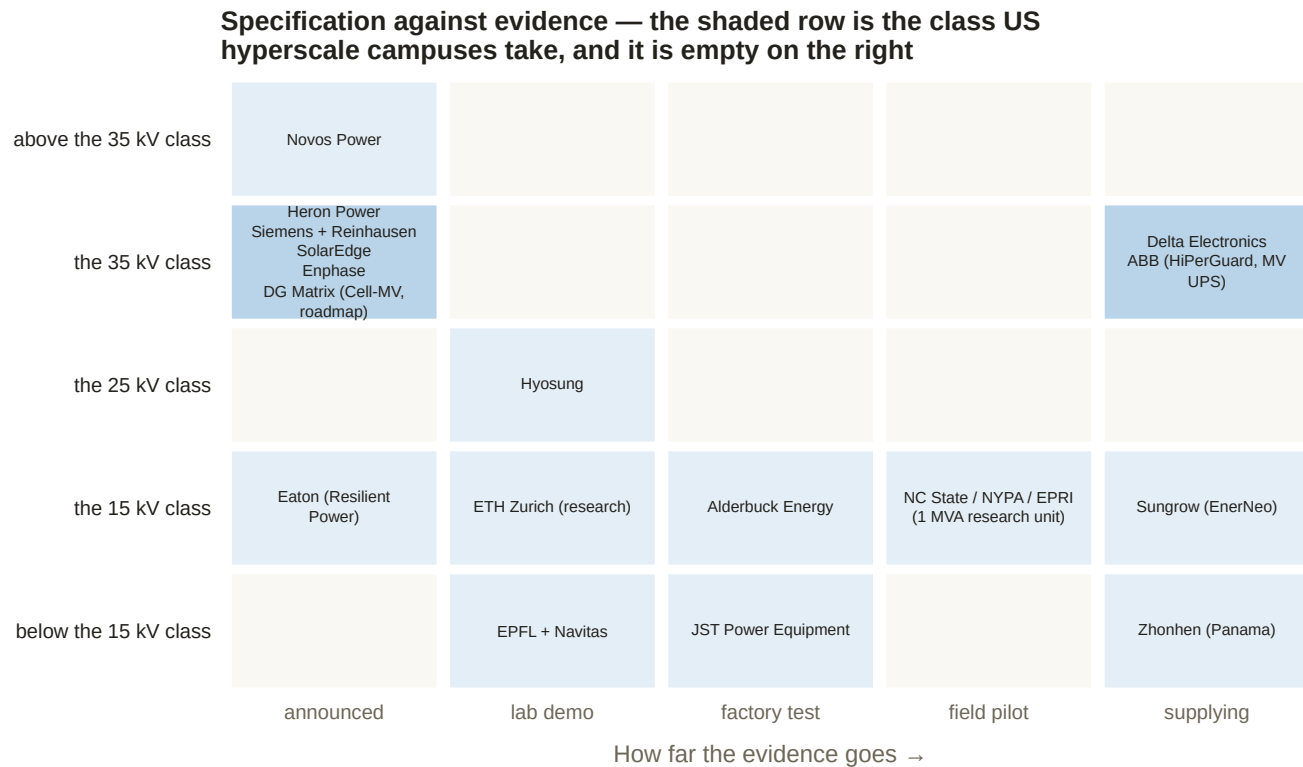


Figure M7 — Specification against evidence. Boundary: rows are ANSI class bands, columns are the evidence tier, and a vendor appears in exactly one cell. Neither axis is a quality score: a vendor high and left has a specification without a product; a vendor low and right has a product that cannot serve a 35 kV campus. A grid rather than a scatter because seven of the seventeen vendors sit in just two cells and overprint at any marker size. Composed from classLedger.

READ FIGURE M7 ACROSS THE SHADED ROW

Every count below is read off figure M7, whose rows carry their own tiers in the ledger above. The 35 kV row is the class large US campuses actually take. It holds five vendors under “announced” and two under “supplying”, and the two under “supplying” are Delta, whose shipped units are in Asia on the vendor’s own claim, and ABB, whose product is a UPS. The three middle columns of that row are **empty**: there is no 34.5 kV-class solid-state transformer anywhere in the world at lab demo, factory test or field pilot.

The buyers have now written that empty row down as a requirement: the OCP specification’s SKU B is a 34.5 kV SST at 5 MW or 10 MW.⁸⁵

6.2 Why 34.5 kV is the class that matters, in numbers

US utilities serve large customers at 12.47, 13.2 or 13.8 kV — the ANSI C84.1 15 kV class — or at 24.9 kV or 34.5 kV, while gigawatt campuses interconnect at 69–345 kV through their own substations.⁴⁷ Large greenfield campuses in Texas and the Southeast trend to 34.5 kV because it moves more power on fewer, smaller feeders, and Northern Virginia campuses run 34.5 kV distribution behind 230 kV ties.⁴

The OCP specification settles which classes the buyers want, and names exactly two: 13.8 kV for SKU A and 34.5 kV for SKU B.⁸⁵ It asks for a basic insulation level of at least 110 kV at 13.8 kV and 150–200 kV at 34.5 kV.⁸⁵ The second matches the ANSI 35 kV class; the first is above the 95 kV that chapter 1 gives for the 15 kV class, so a 13.8 kV unit insulated to the standard class may not meet it.^A

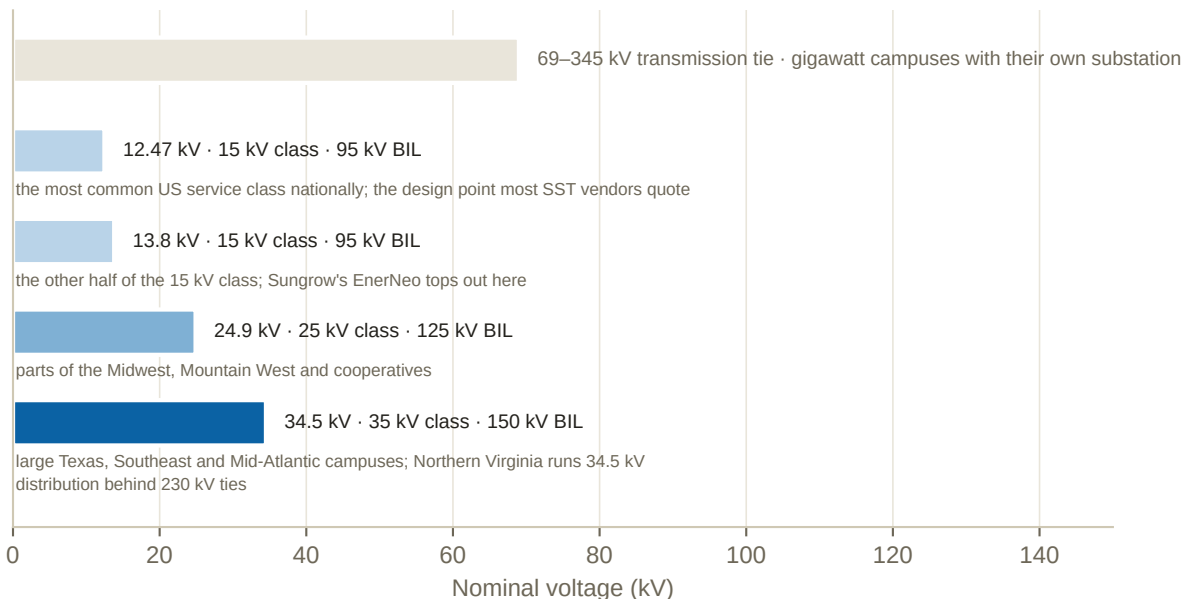
The US ladder — the class sets the product, not a configuration option

Figure M8 — The US ladder. Boundary: nominal voltages with the ANSI C84.1 equipment class and its BIL, plus the transmission tie for comparison. The usage note on each row is from the primer’s treatment of the US service mix. Composed from megmeet-sst-briefing-data.json → classCost.classes.

Each cell can hold only so much of the line, so a cascaded-H-bridge SST’s cell count scales roughly linearly with its input voltage, and the step from the 15 kV class to the 35 kV class multiplies cells, medium-frequency transformers, gate drivers and control channels by *roughly* 2.5×.⁴ The counts computed on the primer’s own assumptions bracket that figure rather than land on it: 13.8 → 34.5 kV is 15 → 35 cells, a 2.3× step, and 12.47 → 34.5 kV is 13 → 35, a 2.7× step.^A The primer’s 2.5× is the round number for the class step; the two exact ratios are what a bill of materials actually moves by. That is the whole argument, and it is worth seeing as a count rather than a multiplier.^A

ANALYSIS — THE COUNT, WORKED ONCE

The assumptions are the ones in the caption below. A 1.7 kV device, derated to 0.55 of its rating for cosmic-ray safety, holds about 0.935 kV per cell. A 34.5 kV line has a phase peak of $34.5 \times \sqrt{2} \div \sqrt{3} \approx 28.2$ kV, and allowing 10% grid overvoltage raises that to about 31.0 kV. Dividing 31.0 kV by 0.935 kV gives 33.1, which rounds up to 34 cells, and one redundant cell makes 35 per phase. The same steps give 15 cells for 13.8 kV and 13 for 12.47 kV. Change the device to 3.3 kV and each cell holds nearly twice as much, which is why the count roughly halves.

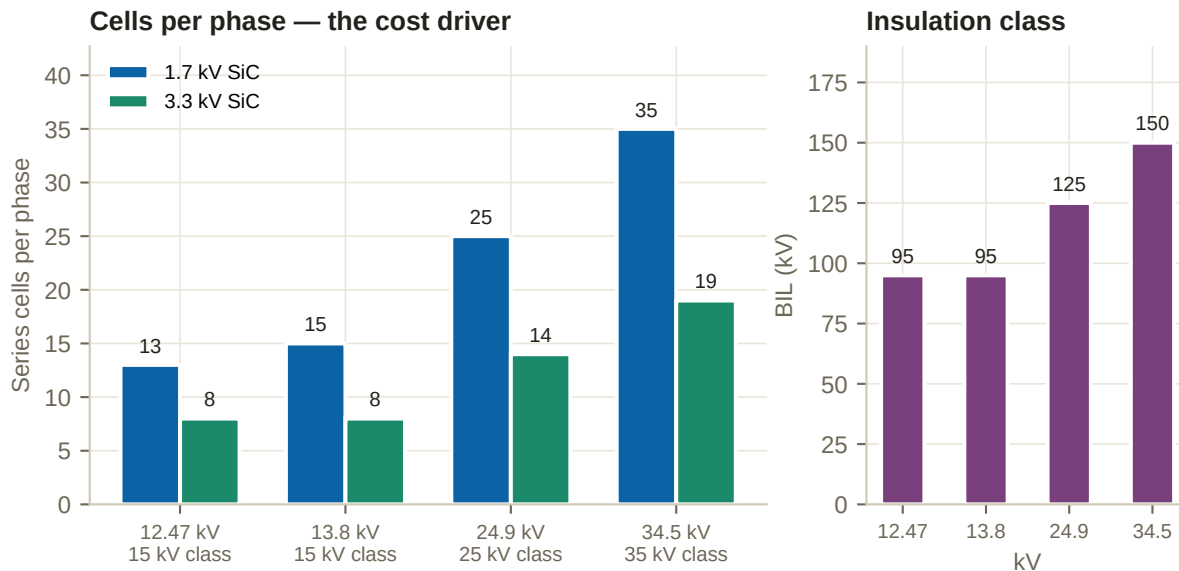


Figure M9 — What the 35 kV class costs inside the converter. Boundary: cell counts are **computed for this briefing** on the primer's stated assumptions — cell DC link = $0.55 \times$ device rating, phase peak = $V_{LL} \cdot \sqrt{2}/\sqrt{3} \times 1.10$ grid overvoltage, plus one redundant cell per phase⁴¹. Real designs vary the derating and the redundancy, so the ratios between classes are what matter and not the absolute counts. BIL is the ANSI C84.1 equipment class, not a vendor figure.

With 1.7 kV devices, a 12.47 kV design needs about 13 cells per phase and a 34.5 kV design about 35: a 2.7× step in cells, and therefore in capacitor banks, magnetics, gate drivers, sensors and failure points.^A Moving to 3.3 kV devices roughly halves both counts, which is precisely why Amperesand builds its front end on 3.3 kV silicon-carbide modules.⁷² On top of the count, the insulation class steps from 95 kV BIL to 150 kV, and a 35 kV interface needs roughly 100 kV of insulation inside the medium-frequency transformer itself.²⁰

THREE CAUTIONS THAT WILL OTHERWISE COST YOU

345 kV is not 34.5 kV. Abilene's Oncor interconnection is 345 kV *transmission*, and the campus distribution class is undisclosed.¹ One misplaced decimal point turns a transmission fact into a fabricated service-class finding, and it is the single most likely error to creep into this material.

The only named US AI-compute site with a disclosed class attached to an SST is at 12 kV, not 34.5 kV.¹ It is Alderbuck Energy's unit for the San Diego Supercomputer Center, hosted by San Diego Gas & Electric and funded by the California Energy Commission, announced on 23 June 2026, and it has still to pass factory test and lab validation before installation.¹

Not everyone agrees 34.5 kV is ready. Hitachi Energy, the incumbent with the deepest manufacturing base in MV transformers, is quoted urging caution specifically on compact 34.5 kV designs, on grounds of insulation and manufacturability, and saying the technology "is not fully mature for every use case".¹ That is a trade-press paraphrase rather than a Hitachi release, but it is the most interesting single datapoint on the question: the company that would have to build the magnetics is the sceptic.

6.3 Programmes, buyers and what is genuinely energised

The strongest field evidence in the world is a research unit. A 1 MW solid-state transformer designed and built at NC State was tested on a real distribution feeder at EPRI's power-delivery laboratory in Lenox, Massachusetts.¹ The work, announced on 18 August 2026 and funded by the New York Power Authority and a DOE award, is claimed as “the first independently verified, megawatt-class solid state transformer validated on a live utility distribution feeder”.¹ The primer gives its class: a 1 MVA unit on a 13.2 kV feeder — the 15 kV class — using 15 kV SiC MOSFETs, run over three days supplying an EV load and energised more than ten times in June 2026.²¹ It therefore belongs in the ledger proper rather than among the undisclosed, and it is the only **field pilot** in the table.^A

The largest committed volumes are all at the low class. Sungrow's EnerNeo carries framework purchase agreements with HEC Technology for 30 MW across 2026–27 and with ZDATA for 100 MW, with a demonstration expected at the end of 2026 and deliveries in 2027–28 — and the product is specified at 10 kV to 13.8 kV.³

No SST has been shown to be energised at a named hyperscaler site.¹ Microsoft states that solid-state transformers are “the next step” in its power transformation after Mt Diablo, naming no vendor, no site, no kV, no MW and no date.¹ GE Vernova stated in April 2026 that a first product would be delivered to an unnamed hyperscaler in the autumn of 2026, followed by about six months of testing, and as of 23 September that delivery has not been reported.¹ Everything else at hyperscaler scale is ecosystem membership or an unnamed counterparty.

ANALYSIS — WHAT THE LEDGER IS ACTUALLY TELLING YOU

Three facts, held together, define the commercial reality of this layer. The most commercially advanced SST in the world cannot serve the class that US hyperscale campuses take. The best-evidenced megawatt-class unit anywhere is a university research project. And the only named US site with a disclosed class is at 12 kV. A vendor arriving with a credible 34.5 kV-class product and a witnessed first article would not be joining a crowded field; it would be the first entrant in an empty one. That is the opportunity and the risk in one sentence, because being first also means being the vendor who discovers what the standards bodies have not yet written.

7 Obstacles to adoption

Extends the primer's chapter 5 (technical) and chapter 6 (grid, supply chain, ride-through, codes, sites, economics). The primer's thin spot is operations and maintenance (O&M): it mentions "maintenance" once and spares, MTBF or technicians not at all. This chapter fills that gap and puts every obstacle in one table, each with a named owner and a status word. **The finding is the empty column:** of twenty-five obstacles, **ten** sit at **unsolved**, and **eight** of those ten name no owner at all — four of the eight in operations and maintenance, two in utility acceptance, one in policy, and only one technical. (The other two unsolved rows do name owners: FERC for the interconnection queue, which is unsolved because no converter can shorten it, and the NFPA Fire Protection Research Foundation for the DC arc-flash model, which is unsolved because its method is aimed at the 2030 edition of 70E.)

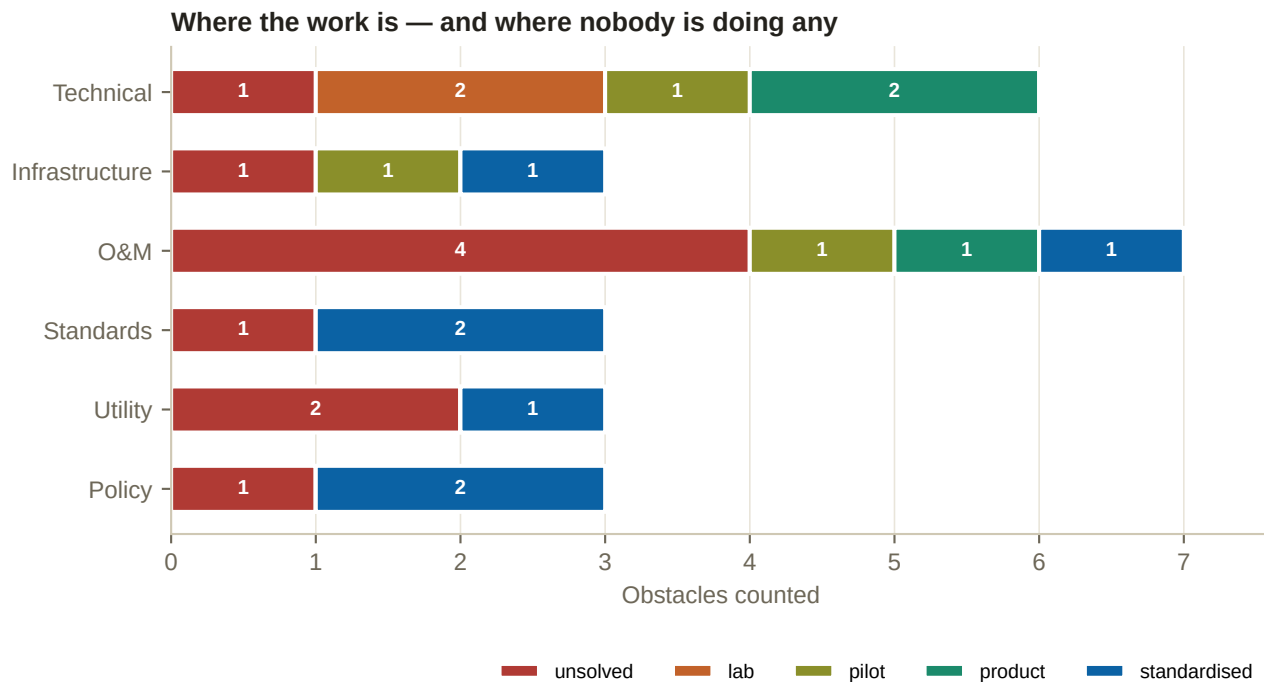


Figure M10 — Where the work is, and where nobody is doing any. Boundary: one row per obstacle in the table below, counted into its family and its status word; the bars are counts and not a severity score. Status vocabulary is fixed and assigned from evidence, not from vendor language. Composed from megmeet-sst-briefing-data.json → obstacles, where every row carries its own source tag.

Obstacle	The mechanism	Who is doing what about it	Status
Technical			
Overload / short-time rating	An oil transformer carries 150-200% of rated kVA for minutes on thermal mass alone; a converter's overload is bounded by junction temperature and must be bought as silicon. No first-party SST vendor publishes an overload curve.	Nobody owns it as a published rating. ¹¹ Vendors claim thermal margin as a design property. ¹ OCP v0.3 now recommends 120% for 5 s and 150% for 150 ms — a buyer's requirement, with no vendor curve yet. ⁸⁵	unsolved
Inrush	No magnetising inrush, so no reactive-power step at close-in.	This one goes the SST's way — energisation is a power-electronics soft start. ¹	product
DC fault current, no natural zero crossing	DC-link capacitors discharge into a fault at 200 A/us; Siemens measured that interruption at that rise rate "was only possible with solid-state circuit breakers". Fused clearing took about 20 ms.	ABB (claims the first fully IEC-certified SSCB in production); Eaton (1500 V / 1250 A hybrid SSCB). ¹	product
SiC cosmic-ray single-event burnout and derating	Atmospheric neutrons cause burnout at 50% or less of rated breakdown, so MV cells must be derated — which is where the 0.55 factor in the cell-count arithmetic comes from.	NASA NEPP on the device physics; device vendors on the FIT budget (failures in time, counted per billion device-hours). ¹	lab

Obstacle	The mechanism	Who is doing what about it	Status
Cell failure, redundancy and bypass	ORNL: series-stacked designs need a failed die to fail short and keep conducting for months. Press-pack silicon does; SiC's thermal stability, small die area and short short-circuit withstand make it "an open research challenge".	Heron (two cell failures per phase, sub-cycle bypass); Amperesand (proprietary redundancy); ORNL flags the open problem. ⁴²	pilot
Insulation coordination and partial discharge	Georgia Tech identify the mismatch between the protective levels of metal-oxide varistors (MOVs) and SST insulation strength, and "the incompatibility of standard impulse test on SST protective structures" — the standard BIL test does not apply cleanly to an SST.	Georgia Tech (Divan, Graber et al.). ¹ NC State on BIL; MFT insulation is an active academic area. ²⁰	lab
Infrastructure			
Interconnection queue and transmission build	ERCOT: about 410 GW queued against 9.0 GW approved to energise and a 3.9 GW observed large-load peak. 888 miles of 345 kV-and-above built in a year against a benchmark near 5,000.	FERC (RM26-4-000); nobody can shorten it with power electronics. ⁴	unsolved
Transformer and switchgear lead times	Standard units about 128 weeks, generator step-ups about 144, worst cases near four years. One flagship US plant at 57 units a year is about 6% of national demand, arriving 2027.	Hitachi Energy, Siemens Energy, GE Vernova/Prolec — all building capacity, all arriving late. ²²	pilot
Ride-through and large-load standards	This is the one constraint an SST genuinely relieves: a converter-fronted load is the only kind that can be programmed to a curve and modelled as one device.	NERC Project 2026-02 (CLO-001/002/003); FERC deadline 31 December 2026; ERCOT NOGRR 282 already numeric. ¹	standardised
O&M			
Mean time to repair and hot-swap	The swap-in-minutes claim is not novel to SSTs — GE Vernova markets the same property for its MM7 modular multilevel drive, which has two decades of field service behind it.	Amperesand claims a power stage swaps in under 20 minutes, two people with a lift. The claim is published in a case study by the company that sells it the silicon. ¹	product
MTBF or FIT for a complete MV converter	The one independent number available: N+1 raises the MTBF of a modular multilevel drive by a factor of about 1.7 — a long way from the step change implied by "five nines".	Nobody. No vendor publishes one. ¹	unsolved
Service life against an oil transformer	The published SST design target found is "15+ years". An oil transformer is financed against 30-40. The owner is buying a mid-life silicon replacement into the capital plan, and nobody has costed it.	Nobody. No standards body has set a life class for an MV SST. ¹ The OCP specification sets 15+ years as its design life. ⁸⁷	unsolved
Spares strategy, spares cost and warranty	An oil transformer's spares strategy is a bushing and a fan. A several-hundred-module SST's spares strategy is an inventory of power electronics with its own obsolescence clock.	Nobody, with one exception: Enphase publishes 10% module redundancy and a 10-year limited warranty. ¹	unsolved
Part-load efficiency	Every efficiency figure in the market — 98%, >98.5%, 98.5-99% — is a peak or nominal number. A data hall does not run at rated load.	Nobody publishes a curve. ^A OCP v0.3 sets a floor of 98% from 50% to 100% load, power-train losses only, and nothing below 50%. ⁸⁵	unsolved
Firmware update and cyber exposure	A companion FCC waiver preserves qualifying firmware updates on already-authorised covered devices only through at least 1 January 2029 — the right to patch is now a time-limited regulatory grant. Whether NERC CIP, NERC's cyber-security standards, attaches to a behind-the-meter hall-edge SST is unaddressed anywhere.	ISA/IEC 62443 as the framework; the FCC as the unexpected regulator of the update channel itself. ¹	standardised
Technicians	A reported shortfall of more than 300,000 electricians against roughly 20,000 retiring a year; an apprentice starting a five-year programme with the IBEW (the electricians' union) in 2025 qualifies in 2030.	Google/NECA/Electrical Training Alliance are funding training; the arithmetic does not close on the relevant timescale. ¹	pilot
Standards			
DC arc-flash incident-energy model	NFPA 70E 2027 adds a new Article 310 naming DC thresholds; the calculation method is aimed at 2030. The hazard is named three years before the method exists.	NFPA Fire Protection Research Foundation — project open, seeking \$3-4M, results aimed at NFPA 70E 2030. ¹	unsolved
Listing of an MV power-conversion unit	The envelope exists. What does not exist is a listed data-centre SST: no vendor had completed UL certification for data-centre SST deployment as of May 2026, per an analyst house that sells the newsletter the claim appears in.	UL (1741 +SA/SB, 347A, 2877); IEC SC 22E for 62477-2 Edition 2, CDV vote closed 2026-03-13. ¹	standardised

Obstacle	The mechanism	Who is doing what about it	Status
The 800 V DC SST specification itself	This is the vocabulary a buyer's engineer will use. The specification document itself could not be retrieved in this run — opencompute.org returned HTTP 403 to every attempt. Obtained on 24 September and read in full: Revision 0.3.0, marked as a first draft for the OCP community. ⁸⁸ Its grounding section is headings only, and the redundancy voltage bands, conveyance losses, verification load profiles and non-utility ramp rates are all TBD. ⁸⁶	OCP — Google, Microsoft and NVIDIA. LVDC Solid-State Transformer Specification v0.3, July 2026; more than 80 manufacturers building to it. OCP — Google, Microsoft and NVIDIA, effective 22 June 2026. ⁸⁸ Announced on 11 August 2026 beside more than 80 partners developing 800 VDC-compatible infrastructure, which is the architecture, not this specification. ⁸⁹	standardised
Utility			
Acceptance of a converter at the service point	NOGRR 282 is now a numeric test: ride through 2 s at 0.85 pu and 150 ms below 0.35 pu, draw no more than 150% current, recover to 90% of consumption within 2 s, survive six sags in 90 s. The OCP specification takes ERCOT's curve as its reference but plots different corner points; see chapter 16.3. ⁸⁶	ERCOT and the PUCT, Texas's utility regulator (NOGRR 282; 16 TAC 25.194, Project 58481); NERC Project 2026-02. ¹	standardised
Approved-equipment-list qualification	At 12.47-34.5 kV the service transformer is commonly utility-owned. An SST displacing it must be accepted onto a utility's approved-equipment list — a multi-year qualification with no visible US precedent, which is why every announced US pilot sits behind a customer-owned MV substation.	Nobody visible. No covered vendor discloses a US utility qualification. ⁴⁸	unsolved
MV equipment inside an operating data hall	An SST terminating 34.5 kV at the row turns white space into MV-classified space, with vault, access, ventilation and qualified-person rules. Probably the largest permitting unknown for facility-level SSTs.	Nobody. No US AHJ precedent was located. ⁴⁹ OCP v0.3 places the SST indoors in a conditioned grey space or outdoors in a NEMA 3R enclosure — not in the white space. ⁸⁵	unsolved
Policy			
FCC Covered List	Two prongs, both required: a bidirectional AC-DC converter, and components enabling remote communication. No voltage or power threshold. "Foreign-produced" is the Buy American content test at 48 CFR 25.101(a), not a nationality test — so a US-headquartered vendor building offshore is captured.	FCC Public Safety and Homeland Security Bureau (DA 26-786, 28 July 2026); DoW/DHS conditional approval, applications due 1 January 2028. ¹	standardised
Executive Order 14421	Signed 26 August 2026. Covers transformers, inverters, breakers, turbines and storage — but applies at 69 kV and above and excludes local distribution. A 34.5 kV hall-edge SST is probably outside it and inside the FCC list.	DOE — implementing regulations due 24 December 2026, recommendations for the Federal Acquisition Regulation (FAR) due 22 February 2027. ¹	standardised
Insurance and bankability of a novel MV asset	No insurer, reinsurer, broker or owner's-engineer standard naming solid-state transformers was found. For a first-of-a-kind MV asset this is the largest single information gap on the commercial side.	Nobody visible. ^A	unsolved

7.1 The operations-and-maintenance chapter, which does not exist anywhere else

THE FRAMING THAT MATTERS MORE THAN ANY NUMBER BELOW

There is no field-service record for medium-voltage solid-state transformers, because **there is no installed base**. Every serviceability figure in this section is either a vendor's design claim about a product not yet shipped at scale, or borrowed from the nearest analogue with real field history: the cell-based MV drive, serviced by manufacturers' field engineers for two decades. The honest position is that **the O&M model is asserted, not demonstrated**, and holding that distinction in a customer meeting is worth more than any of the individual claims.¹

Mean time to repair. The most concrete claim available is Amperesand's: a power stage "can be swapped out in less than 20 minutes", with modules "small and light enough for simple two-person replacement in minutes, using readily available lifts". It is published in a case study by Wolfspeed, which supplies the silicon carbide inside the product, so both

parties gain from the claim.¹ Put it next to GE Vernova, which markets the identical property for its MM7 modular multilevel drive — modules “light enough for one or two people to swap a faulty unit with a spare within a few minutes” — and swap-in-minutes turns out to be established MV-drive practice, not an SST innovation.¹

Reliability arithmetic. *No MV SST vendor publishes an MTBF or FIT number for the complete converter.* Every reliability statement located is either qualitative, such as “five nines” or “excellent cosmic ray performance”, or a manufacturing metric such as Enphase’s 500 defects per million shipped.¹ That is a production-quality figure, and it must never be relayed as a field reliability rate.¹ The one independent number available says N+1 redundancy raises a modular multilevel drive’s MTBF by a factor of about 1.7, and the same source warns that “extreme care should be taken when using these figures to compare vendors”.¹ The source is a drives consultancy with an interest in arguing that vendor numbers are incomparable, but its conclusion happens to be defensible.¹

Service life. The published SST design target located is a “15+ year lifetime”, while a large oil-filled transformer is specified and financed against a service life several times that.¹ No standards body has defined a life class for an MV SST, and no vendor publishes an end-of-life or mid-life refresh plan.¹ So an owner buying an SST is also buying a mid-life replacement of its silicon into the capital plan, and nobody found has costed it.¹

Warranty and spares. Exactly one warranty term was located across the entire research pass: Enphase’s 10-year limited warranty on the IQ SST.¹ No warranty, service-contract structure, response-time commitment or availability guarantee was published by Eaton, ABB, Hitachi Energy, Amperesand, DG Matrix or Heron Power in anything reachable.¹ Nor does any vendor publish a spares list, a recommended stocking level or a spare-cell price.¹ The structural point is worth carrying into a meeting: an oil transformer’s spares strategy is a bushing and a fan, while the spares strategy for an SST of several hundred modules is an inventory of power electronics with its own obsolescence clock.

Firmware and cyber: a transformer that takes software updates. The frameworks exist, but no profile specific to MV SSTs does: ISA/IEC 62443 is the product-side security standard for operational technology (OT), and vendor platforms already collect access, configuration and firmware events so they can be monitored against NERC CIP and IEC 62443-3-3.¹ The regulatory teeth arrived from an unexpected direction. The national-security rationale the FCC stated for its July 2026 action is precisely the firmware-update channel, and the companion waiver preserves qualifying Class I and Class II software and firmware updates on already-authorized covered devices only through at least 1 January 2029.¹ **The right to patch a covered device is now a time-limited regulatory grant, not a vendor decision.**¹ Whether NERC CIP attaches to a behind-the-meter hall-edge SST is addressed by no source located, and it is an open question.¹

Technicians. The United States is reported to need more than 300,000 additional electricians while roughly 20,000 retire every year, and medium-voltage scope and switchgear commissioning are named as the specific skills moving into the data-centre footprint.¹ The figure is widely repeated, but it comes from a trade careers source and does not trace to a primary one.¹ Google is funding training with NECA (the National Electrical Contractors Association) and the Electrical Training Alliance, and the same source makes the honest point about it: a four-week credential is not a four-year apprenticeship, and an apprentice who started a five-year IBEW programme in early 2025 qualifies in 2030.¹

7.2 Standards and listing — the three-year gap

The clearest single finding in the standards picture is a gap in timing. **NFPA 70E 2027 adds a new Article 310 for DC hazards** with explicit thresholds: contact-thermal at a power of 1,000 W or more; shock at 100 V DC or more and above 40 mA; and arc flash above 150 V DC and above 1.2 cal/cm² (calories per square centimetre, the unit of incident energy on skin).¹ An 800 V DC hall bus is over every one of them.¹ Meanwhile the NFPA Fire Protection Research Foundation’s project to develop a DC arc-flash hazard model was, in February 2026, still seeking sponsors at an estimated \$3–4 million, with results aimed at the **2030** edition of 70E.¹ So the hazard is named in 2027 and the method for calculating it

arrives in 2030 at the earliest. In between, operators energise 800 V DC busway using conservative table-based PPE (personal protective equipment), rules for working de-energised, and negotiation project by project with the authority having jurisdiction.⁴⁹

The listing envelope itself exists. UL 1741, with supplements SA and SB, is the dominant US route, and medium-voltage considerations were brought into it by revision; UL 347A and UL 2877 cover MV power conversion from 1 kV up to 38 kV, which puts the 34.5 kV half-edge case inside them.¹ Internationally, IEC 62477-2 covers converters from 1 kV AC / 1.5 kV DC up to 36 kV AC / 54 kV DC, and Edition 2 went to a committee draft for vote that closed on 13 March 2026.¹ NEC 2026, the US National Electrical Code, adds a new Article 270 for medium-voltage grounding and bonding above 1,000 V AC, which matters precisely because SSTs push medium voltage into the building footprint.¹

The OCP specification's own compliance list is the practical checklist: NFPA 70, 70E and 72; UL 347A, 508C, 840, 1741, 2877, 60730 and 1699; and ten IEEE documents, from 519 on harmonics and 1547 on interconnection to 1584 on arc flash.⁸⁷ It lists no UL 9540, although the SST it describes is meant to be coupled with energy storage.^A

THE LINE TO REMEMBER FROM PCIM EUROPE 2026

"Currently, we don't have a specification, and currently we don't have a UL certification for the 800-VDC bus. That is a major gap."¹ A related point carries as much weight: the server ecosystem was built around the SELV (safety extra-low voltage) classification for circuits below 60 V, so creepage and clearance at 800 V — the insulating distances along surfaces and through air between conductors — are unresolved in existing designs.¹

7.3 Utility acceptance — the question has changed

Eighteen months ago the question was whether a utility would accept a converter at the service point. Now it is whether any large load can *prove* that it rides through — and a converter is the easiest thing to prove it with. The driver is not specific to SSTs; it is the load-loss events.¹

- **Texas.** ERCOT and the PUCT have turned ride-through into a numeric acceptance test through NOGRR 282. PUCT rule 16 TAC §25.194, under Project 58481, implements Texas Senate Bill 6 (SB 6) for loads of 75 MW and above: study fees of \$100,000 for 75–249 MW and \$300,000 at 250 MW and above, financial security of \$50,000 per MW of requested peak demand, and a non-refundable interconnection fee of \$50,000 per MW of contracted peak demand.¹
- **NERC.** Project 2026-02 proposes three standards: CLO-001 for interconnection studies and modelling data, CLO-002 for operational data and communications, and CLO-003 for protection coordination and disturbance monitoring, against a FERC-directed filing deadline of 31 December 2026.¹
- **FERC.** The federal regulator opened a generic rulemaking on large-load interconnection at Docket RM26-4-000, and on 18 June 2026 issued Federal Power Act section 206 show-cause orders to all six RTOs and ISOs (the regional grid operators) on their large-load and co-located-load tariffs.¹
- **Individual utilities.** Dominion's new GS-5 rate class for customers above 25 MW was approved in November 2025, effective January 2027, with 14-year contracts.¹ AEP Ohio's data-centre tariff took effect on 23 July 2025 and requires large new customers to pay for a minimum of 85% of their stated monthly energy.¹

What has *not* changed is the approved-equipment question. At 12.47–34.5 kV the service transformer is commonly owned by the utility, and an SST displacing it must be accepted onto the utility's approved-equipment list — a multi-year qualification with no visible US precedent.⁴⁸ That is why every announced US SST pilot sits behind a medium-voltage substation that the customer owns.⁴⁸

7.4 The three obstacles nobody is working on

These are worth stating plainly, because each is a question a careful buyer asks and no vendor can currently answer.

- **Insurance and bankability** of a novel MV asset: no insurer, reinsurer, broker or owner's-engineer standard naming solid-state transformers was located in the research pass.¹
- **Part-load efficiency**: every figure in the market is a peak or nominal number, and a data hall does not run at rated load.¹ OCP v0.3 now sets a floor from 50% to 100% load, but nothing below it, and no vendor publishes a curve.⁸⁵
- **Field-failure and availability data** from an operating installation: there is none to find, because there is no installed base of MV data-centre SSTs to report on.¹

ANALYSIS — WHERE THE LEVERAGE IS

The technical obstacles all have named owners, and most are at *product* or *standardised*. The operational ones mostly have nobody. That inverts the usual assumption about where a challenger has room: the engineering is crowded and the operations manual is blank. **The first vendor to publish an overload curve, a part-load efficiency curve, an MTBF figure for the complete converter and a warranty with a response-time commitment gains a durable advantage at almost no engineering cost**, because publishing what you already know is cheaper than inventing anything — and each of those four is a question a buyer's engineer asks in the first hour. Since OCP v0.3, two of the four — overload and part-load efficiency — have a buyer's number to be measured against.

8 NVIDIA and Oracle: what their programmes specify, and what their engineers will ask

Extends the primer's chapter 2.2 and chapter 4.2 on NVIDIA; the primer does not cover Oracle at all. These are two completely different conversations, and the most useful thing this chapter does is explain why. NVIDIA has published an architecture with dates, ratings and interfaces, so with NVIDIA you are being checked against a record. Oracle has published almost nothing about the electrical architecture inside its AI data centres, so with OCI you are helping write one.

What each programme has actually committed to, and when

NVIDIA architecture

2025-10-13

800 VDC ecosystem published; about 30 named partners; MV input cited as "e.g. 35 kVAC"; conversion "at the facility level"

2026-03

Joint NVIDIA / Google / Microsoft 800 VDC white paper via OCP

2026-06-01

Siemens + NVIDIA + Fluence + nVent DSX Vera Rubin reference design: nominal 34.5 kV utility, 136 MW facility / 100 MW IT, factory-tested MV and LV skids, UL-aligned, Tier III concurrent maintainability — and no mention of 800 VDC or SSTs at all

2026-06-22

OCP SST Specification Rev. 0.3.0 effective (Google, Microsoft, NVIDIA): a 13.8 kV / 5 MW SKU and a 34.5 kV / 5 or 10 MW SKU, 800 V DC out — announced by OCP on 11 August 2026

2026-08-11

Three-tier rollout stated: power rack H2 2026, row power center 2 MW/row 2027, DC power block 2027+; more than 80 manufacturers building to the spec

2026-09-21

NVIDIA DSX Ready qualification programme launches — covering BESS and CDUs only. There is no NVIDIA qualification path for an SST

2026-H2

800 VDC power rack enters production; Vera Rubin NVL72 ships

2027

Row power center, 2 MW per row, overhead 800 VDC busway; full-scale 800 VDC production "coincides with Kyber"

2029

Next-generation SST and MV-direct conversion: 34.5 kV AC to 800 V DC, blocks toward 10 MW — corpus-only, page-referenced to the August 2026 execution paper, not confirmed on a public NVIDIA page

Oracle / OCI

2025-10-14

"First Principles" — OCI's only engineering post on AI power. Its entire power content is capacitance, advanced energy storage, hardware-accelerated GPU ramping and software ramp control. No voltage, no kW/rack, no topology

2026-01-26

Oracle states it is funding onsite transmission lines, battery storage and dedicated substations so costs are not passed to ratepayers

2026-04-27

Project Jupiter (Dona Ana County, NM) to be fully powered by up to 2.45 GW of Bloom fuel cells, replacing planned gas turbines and diesel, as one single microgrid campus — Oracle's boldest published electrical decision

2026-09-15

Investment in more than 1.7 GW of carbon-free electricity supplying ERCOT

2026-09-16

Project Lighthouse: Oracle names American Transmission Co. on the Ozaukee County interconnection — the only host transmission utility Oracle names itself

not published

Rack density, distribution voltage, where AC-to-DC conversion sits, MV-direct conversion, solid-state transformers, and any vendor-qualification programme. The only Oracle-800 VDC link in existence is NVIDIA naming OCI among providers "designing for 800-volt data centers" — NVIDIA's characterisation, not Oracle's statement

Figure M11 — What each programme has actually committed to, and when. Boundary: milestones are dated from the named source only, and the corpus-only NVIDIA item is marked as such in its own text. Two parallel dated lists rather than a shared time axis, because NVIDIA's milestones cluster inside eleven months and overprint at page width. Composed from megmeet-sst-briefing-data.json → timelines.

8.1 NVIDIA — what is on the record

The architecture is published and hangs together, with one internal inconsistency worth knowing about. NVIDIA's technical blog specifies converting **13.8 kV AC** grid power directly to 800 V DC at the data-centre perimeter using industrial-grade rectifiers, then distributing via row-level 800 V DC busways over two conductors with DC-DC conversion in the compute rack.¹ A different NVIDIA blog of the same date cites medium voltage "e.g., 35 kVAC" as the utility supply

and puts AC-to-DC conversion “at the facility level”.¹ **NVIDIA’s own pages name two different MV classes.** Ask which one a given site uses. Do not assume, and do not assume they are unaware of the discrepancy. **The OCP specification NVIDIA co-authored settles it at the product level by specifying both: a 13.8 kV SKU and a 34.5 kV SKU.**⁸⁵

The load profile is the most important number NVIDIA publishes for a converter vendor: rack utilisation swings from **30% to 100% in milliseconds**.¹ NVIDIA’s own answer to it sits in the rack: 400 J of capacitor storage per GPU in Vera Rubin, “6× more rack-level energy storage” than the prior generation, Intelligent Power Smoothing and dynamic power steering.¹ The commercial consequence is that the real negotiation is not whether your converter can ride the swing. It is *how much of the ride-through is yours and how much is theirs*.

The ecosystem roster is a weaker signal than it looks. NVIDIA’s October 2025 blog lists companies “building 800 VDC-compatible infrastructure”, which is a published alignment, not a qualification, a design win or a supply agreement.¹ By August 2026 NVIDIA describes more than eighty manufacturers building to the specification, without publishing the list.¹ **OCP’s own announcement words the figure as more than 80 partners developing 800 VDC-compatible infrastructure — the architecture, not the SST specification.**⁸⁹ Critically, **that page does not break the roster into rectifier or SST sub-categories and names no vendor as an SST vendor** — so any claim that a firm is “NVIDIA’s named SST partner” is unsupported by it.¹ The three tiers it does name are silicon (fourteen firms including Infineon), power system components (Bizlink, Delta, Flex, Lead Wealth, LITEON and Megmeet) and data-centre power systems (ABB, Eaton, GE Vernova, Heron Power, Hitachi Energy, Mitsubishi Electric, Schneider Electric, Siemens and Vertiv).¹

The sixteen questions an NVIDIA power engineer would ask

Each is anchored to something in the published record; where the record is silent, the question comes from the absence and is marked as such.

#	The question	Why they ask it, and what you need ready
1	Two-wire 800 V or three-wire ± 400 V — and can your unit do both?	The published architectures genuinely diverge: OCP’s Diablo is three-wire ± 400 V, NVIDIA’s is two-wire 800 V with higher copper utilisation. A vendor without a side fails the first five minutes. ¹ At the SST’s own terminals the OCP specification answers it: 800 V DC unipolar. ⁸⁵
2	What is your input MV class — 13.8 kV, 34.5 kV, or both?	Their own pages name both, and the Siemens NVIDIA-aligned reference design is built on nominal 34.5 kV. They know the record is inconsistent and will test whether you do. ¹ The OCP specification defines both: SKU A at 13.8 kV and 5 MW, SKU B at 34.5 kV and 5 or 10 MW. ⁸⁵
3	What is your grounding scheme, and do you support continuous insulation monitoring and active arc-fault detection?	The protection posture reported for the specification is high-resistance grounding, continuous insulation monitoring, active arc-fault detection and mechanical connector interlocks. Expect them to ask which of these your product implements and which it assumes the facility provides. ¹ OCP v0.3 names the options: low-resistance or solid grounding on the MV side, as the utility designs it, and a floating or high-resistance ground on the DC side, with the detail still TBD. ⁸⁵
4	What is your available fault current and how fast do you clear?	The published ecosystem expectation is that an SST limits fault current to roughly 1.5× nominal for durations limited to hundreds of milliseconds — a radically different protection philosophy from a magnetic transformer feeding tens of kA, and it changes downstream breaker coordination entirely. Bring the number and the coordination study. ¹ The specification is more exact than that expectation: 150% in constant-current mode for 150 ms, after which the SST may trip, plus 120% in constant-voltage mode for 5 s. ⁸⁵ On the MV side it asks for 18–40 kA of symmetrical fault withstand at 13.8 kV and 25–50 kA at 34.5 kV, duration TBD. ⁸⁵
5	What is your isolation rating?	The published expectation is 100 kV insulation for a 35 kV input. ¹ The specification states it as basic insulation level instead: at least 110 kV for the 13.8 kV SKU and 150–200 kV for the 34.5 kV SKU. ⁸⁵
6	When the rack swings 30% to 100% in milliseconds, how much of the ride-through is yours and how much is the rack’s?	This is the single most important technical conversation you will have, because it is a negotiation about responsibility rather than a specification check. ¹ The specification allocates it: in the deeper low-voltage band the SST draws no input current, and the storage coupled to it carries 100% of the load. ⁸⁶

#	The question	Why they ask it, and what you need ready
7	What is your efficiency, at what load points, and measured across which boundary?	NVIDIA's whole business case is an <i>end-to-end</i> claim, so a point efficiency at full load is not an answer to it. State the boundary and give the curve at the real load profile. ¹ The specification's own boundary is power-train losses only, and its floor is 98% from 50% to 100% load. ⁸⁵
8	What is your unit rating and how do you get to a 2 MW row or a 4.8 MW block?	Their modularity numbers are published: a 2 MW row power centre for 2027 and 4.8 MW blocks with 1,250 A busways and a 4+1 catcher. Your paralleling story has to land on them. ⁷⁷ The OCP SKUs are 5 MW and 10 MW, against NVIDIA's 4.8 MW block. ⁸⁵ Its appendix sketches catcher, distributed, N+C and N redundancy schemes. ⁸⁷
9	Is it N+1 at the cell level, and are the sub-blocks hot-swappable?	The published expectation is modular sub-blocks with hot-swap capability, against availability targets of 99.9% for AI training and 99.999% for inference. Ask which workload class the site is, because the two numbers imply different products. ¹
10	What is your failure mode, and what is the bypass?	NVIDIA-aligned reference designs target Tier III concurrent maintainability, and an SST with no bypass path cannot be concurrently maintained. This is a gating question, not a detail. ¹ The specification's state machine makes it a service question too: a permanent fault keeps the unit out until an operator validates, services, resets and re-provisions it. ⁸⁷
11	Are you UL-listed for the 800 V DC bus — and if not, what is your path?	Nobody is. Know your listing status precisely and do not overstate it; the honest answer here is worth more than a confident one. ¹
12	How do you get into a DSX Ready category, and will you self-qualify or submit test data?	MV conversion is not yet a category. The right answer shows you know that and want to help define it. ¹
13	What is your telemetry and control interface?	Correction, 24 September: the OCP specification names one, Modbus TCP/IP, and no other. ⁸⁵ From the absence: NVIDIA publishes no telemetry or management-interface requirement: no reference to PMBus, Redfish, DMTF or Modbus on any page located (PMBus and Modbus are power-management and control protocols; Redfish is a management interface published by DMTF, a standards body). But the Siemens reference design specifies a centralised management suite with a single pane of glass, so integration into someone else's DCIM (data-centre infrastructure management software) is the real requirement. Ask whose. ¹
14	Do you fit in a factory-tested skid, and what is your lead time against the 2027 row date?	The one published NVIDIA-aligned reference design is delivered as pre-engineered, prefabricated, factory-tested MV and LV skids. Lead time is a schedule question against published dates. ¹
15	What is your harmonic signature at the MV terminals?	From the absence: no NVIDIA or OCP harmonic limit could be evidenced. Since an SST is an active front end feeding a utility interconnect they will ask anyway; bring your THD (total harmonic distortion) figures and an IEEE 519 assessment before anyone requires one.¹ Correction, 24 September: the OCP specification sets them — IEEE 519, IEC 61800-3 Category C4, and IEC 61000-6-2 and 6-4, with input power factor above 0.99 at full load. ⁸⁵ Bring THD (total harmonic distortion) figures and an IEEE 519 assessment to the first meeting.
16	What is your cyber and firmware posture?	From the absence: not addressed on any NVIDIA or OCP page reachable. An SST is a software-defined, remotely updatable element of the critical power path; expect the review regardless. ¹ The OCP specification adds nothing here beyond naming Modbus TCP/IP, which carries no authentication of its own. ^A

8.2 Oracle — the headline finding is an absence

ORACLE HAS PUBLISHED NOTHING ABOUT THE ELECTRICAL ARCHITECTURE INSIDE ITS AI DATA CENTRES

No voltage class, no distribution topology, no rack-power figure, no DC distribution, no medium-voltage conversion strategy, and **no mention of solid-state transformers anywhere in Oracle's own published material** across its blogs, newsroom, data-centre pages and site pages.¹ Oracle's public voice on power is about *sourcing* it — grids, fuel cells, turbines, substations, ratepayers, interconnection — never about converting and distributing it.

Oracle's only substantive engineering post on AI data-centre power is "First Principles: Data Center Innovations to Power Gigawatt Scale Superclusters" of 14 October 2025, by OCI's chief technical architect and its VP of AI infrastructure. It is a one-minute read, and its entire statement on power is that AI gigawatt-scale data centres face "substantial load sizes and significant power fluctuations resulting from synchronous computational workloads", and that to manage them "OCI leverages the current best practices integrating capacitance, advanced energy storage solutions, hardware-accelerated GPU ramping techniques, and software-based ramp control algorithms".¹ Those four levers are OCI's published framing of the problem an SST would have to live inside.

THE ONE THING NOT TO SAY TO AN ORACLE ENGINEER

NVIDIA's blog states that "CoreWeave, Lambda, Nebius, Oracle Cloud Infrastructure and Together AI are among other industry pioneers designing for 800-volt data centers".¹ That is the strongest published Oracle–800 V DC link that exists, and **it is NVIDIA's characterisation of OCI, not an Oracle statement**. Quoting it back to an OCI engineer as an Oracle position would be a mistake, and a visible one.

What Oracle *has* published is a power-procurement record, and it is unusually rich. **Project Jupiter** in Doña Ana County, New Mexico will be "fully powered" by up to 2.45 GW of Bloom Energy fuel cells, replacing previously planned gas turbines and diesel generators and consolidating the facility into "one single microgrid campus" — Oracle's single most consequential published electrical decision.¹ At **Abilene**, Oracle states the campus connects directly to the ERCOT grid with GE Vernova natural-gas turbines for backup, across eight buildings on 1,100 acres — and states no voltage, no rack density and no electrical topology.¹ Oracle is also the tenant rather than the owner there: the campus is developed by a Crusoe, Blue Owl and Primary Digital Infrastructure joint venture and leased to Oracle.¹ At **Project Lighthouse** in Ozaukee County, Wisconsin, Oracle names American Transmission Co. on the interconnection application — the only host transmission utility Oracle names by name anywhere in its own material.¹ And Oracle states plainly that it is "funding new onsite transmission lines, battery storage, and dedicated substations" so costs are not passed to ratepayers.¹

The twelve questions an OCI electrical engineer would ask

The framing is different. They are not checking you against a specification; they are deciding whether MV-direct conversion belongs in their next design at all. Sell the decision, not the compliance.

#	The question	The published basis
1	Where does this fit in a campus we island on fuel cells?	Project Jupiter, up to 2.45 GW of Bloom fuel cells as one microgrid campus. Solid-oxide fuel cells are DC-native and Oracle has not said what it does with that DC — it is the only Oracle site where the published design makes a DC-native conversion conversation obviously relevant. ¹
2	Does your converter replace or supplement capacitance and energy storage?	Position the SST against OCI's own four published levers by name. ¹

#	The question	The published basis
3	Can it act as an MV UPS, and does that let us delete equipment?	The OCP definition frames an MV SST coupled with energy storage as a medium-voltage UPS replacing the line-frequency transformer, rectifier units and storage. For a tenant paying for onsite transmission, storage and dedicated substations, deletion of apparatus is the argument that lands. ¹ Confirmed first-hand on 24 September: the specification's scope says exactly this, qualifying the storage with "as required by architecture".⁸⁵
4	What does it do to our interconnection application and our behaviour at the point of common coupling?	Interconnection is on Oracle's critical path and in its public statements. An active front end changes the PCC behaviour they have already filed. ¹
5	We are the tenant, not the owner — who do you actually have to satisfy?	At several sites the specifying authority is the developer. Expect to be routed to Crusoe, Vantage, Related Digital or Digital Realty, and expect to be tested on whether you already knew that. ¹
6	What service voltage do you need, and does it match what we already bought?	Oracle publishes no service-voltage class for any site but does fund dedicated substations. The question is whether your class matches substations already designed or ordered. ¹
7	How does this interact with our closed-loop, non-evaporative cooling standard?	Oracle standardises on it, with water use "on par with a typical office building" and a one-time fill at Abilene. A liquid-cooled SST joins that loop on Oracle's terms, or is air-cooled. ¹
8	What is your availability figure and your failure mode, for an inference fleet?	The published ecosystem targets are 99.9% for training and 99.999% for inference, and OCI runs both on the same campuses. Ask which buildings are which. ¹
9	What is your listing status, and what do we tell the AHJ and our insurer?	Oracle is building in Texas, New Mexico and Wisconsin under three regulatory regimes and is publicly sensitive to permitting. The published gap — no UL certification for the 800 V DC bus — is theirs to carry too. ¹
10	What is the lead time, and is the supply chain domestic?	Oracle publishes no procurement posture, standardisation list, domestic-content rule or exclusion list for electrical equipment, so this is asked commercially rather than against a policy — but its community-facing material emphasises local suppliers and US siting. ¹
11	What is the service model and where are the spares?	NVIDIA's architecture claims up to 70% lower maintenance cost; an operator will ask you to evidence that in a service contract, for campuses Oracle says need more than 1,000 permanent employees. ¹
12	Who else has one running, and at what scale?	Nothing in Oracle's record indicates any SST deployment. With no internal reference and no published specification, the first question a cautious operator asks is for someone else's operating hours. Have the honest answer ready. ¹

ANALYSIS — THE TWO CONVERSATIONS, IN ONE SENTENCE EACH

With NVIDIA you are being measured against a published architecture that does not yet have a box for your product, so the winning posture is technical precision plus an offer to help write the category. With OCI you are talking to an organisation that has published its power *sourcing* in detail and its power *conversion* not at all, so the winning posture is to arrive with the decision framed — what deletes, what it costs, who else is running one — rather than with a compliance answer to a specification that does not exist.

PART IV

Megmeet and the competition

What the company has actually disclosed about its own converter, how it compares vendor by vendor, where it stands in each of its six business groups, and what the policy fence does to it.

9 Megmeet's SST and 800 V DC chain — disclosed against undisclosed

This is the chapter to be most careful in, because it is where guessing is most tempting and most costly. Everything below is either what Megmeet has published or an explicit statement that it has published nothing.

9.1 The service-voltage class — the answer is no, and the search was thorough

MEGMEET HAS NEVER DISCLOSED A KV CLASS FOR ITS SOLID-STATE TRANSFORMER

Across the thirty-eight sources pinned in the v7 dossier, the string “kV” does not appear once, and the converter is described only as taking *grid high-voltage input* to 800 V DC.⁸ A dedicated text scan of four filings, performed for this briefing, found **zero hits** for kV, for 千伏 (kilovolt) or even for 中压 (“medium voltage”) in the FY2025 annual-report summary, the H1 2026 interim report and two investor-relations records.¹

Two details sharpen the point. In the FY2025 summary, the SST is described as directly accepting grid high-voltage input and delivering 800 V DC at over 98.5% efficiency, supporting megawatt-class centralised supply.¹ In the H1 2026 interim, the same product carries two new words: 研发中, “under development”, and 预期, “expected”, in front of the efficiency figure.¹ Between April and August, in other words, the company *narrowed* its own claim. And when an analyst asked point-blank in April 2026 for the specifications of the domestic and international versions, the answer named two versions and attached no voltage to either.¹

THE ONE CONTRARY SOURCE, AND WHY IT IS NOT USABLE

A Chinese industry report is indexed as stating that Megmeet runs a “domestic 10 kV / overseas 35 kV dual version” with Infineon silicon and a prototype in the first half of 2027.¹ During this briefing's research the host returned HTTP 403 to every fetch, so the page was not read then.¹ Dossier v8 has since read it: the page is ifeng's of 1 July 2026, it attributes the split to the 20 May earnings call, and the exchange-filed record of that call calls the SST pre-research and contains no kV figure.⁷⁸ There are three reasons not to carry it. The filed record of the call it cites does not support it.⁷⁸ 10 kV domestic and 35 kV international is exactly the inference an analyst would make from “domestic version / international version” under Chinese grid norms, and that is the inference this document forbids. And **35 kV is not a US service class**; the US class is 34.5 kV. Treat it as a bounded lead of low confidence, and do not repeat it as Megmeet's specification.

9.2 What is published — the chain, box by box

The chain Megmeet publishes runs: AC compensator → BESS and backup shelves → **SST (>98.5%, 800 V DC out)** → 1 MW+ sidecar → power shelves → point of load.⁸ Everything below the converter is specified and shipping; the converter is the one item not built. The table takes the chain box by box.

Stage	What is disclosed	What is not
Solid-state transformer	Grid high-voltage input → 800 V DC; efficiency above 98.5%, stated as <i>expected</i> in the most recent filing; megawatt-class centralised supply supporting a PUE (power usage effectiveness: total facility energy divided by IT energy) below 1.1, as a company claim. ⁸	Everything else. No service-voltage class, no model number, no datasheet, no MVA or MW rating beyond “megawatt-class”, no topology, no MFT frequency, no footprint, no cooling, no protection scheme, no breaker, no availability date, no measurement boundary for the efficiency figure. ¹
800 V HVDC sidecar	480/380 V AC → 800 V DC external power cabinet, over 1 MW per rack, configurable 800 V DC BBU and supercapacitor shelves; announced for NVIDIA Kyber in May 2025 — first mover among mainland vendors. Claims against legacy in-rack AC: up to +5% end-to-end efficiency, −45% copper, up to −30% TCO. ⁸	Those three claims are NVIDIA’s architecture claims for 800 V DC against a legacy AC hall , not measured Megmeet results, and they are not SST claims at all. ⁶²
800 V / 570 kW side rack	800 V DC output rated 570 kW, with integrated battery-backup and power-conversion functions. ⁸	No efficiency figure, no redundancy scheme published.
Power shelves	33 kW (IPU433-AI616): 1U 19-inch, 33 kW N+1 / 16.5 kW N+N, hot-swap, with IPMI/Redfish/SNMP management interfaces. 110 kW liquid-cooled for GB300 and Vera Rubin-class racks at 45 °C warm-liquid inlet. IPU433K-AA1616: 27.5 kW N+1 / 16.5 kW N+N, six 5.5 kW rectifier slots. ⁸	—
Backup	BBU shelf 1U: 180 s of backup at 16.5 kW, 240 s at 13.2 kW, peak support to 26.4 kW. Supercapacitor shelf 15 kW. ⁸	—
Server PSUs	CRPS / M-CRPS from 800 W to 5.5 kW (Ruby M-CRPS launched March 2026); 80 PLUS Platinum / Titanium (96%) / Ruby efficiency certifications; power density above 100 W/in ³ as a company claim against under 50 traditional; hot-swap N+1, active PFC, PMBus 1.2 with black box; CB, UL, CE and CQC certifications. ⁸	—
Not sold at all	—	Megmeet sells no busway and no DC breaker . The shipping chain begins at three-phase 380–480 V AC. ¹

The disclosure gap — nobody has all four, and one column is empty for everyone

	Service-voltage class	Unit MW rating	Evidence beyond an announcement	A listed unit
Heron Power	yes	yes	—	—
Siemens + Reinhausen	yes	—	—	—
Delta Electronics	yes	—	yes	—
SolarEdge	yes	yes	—	—
Enphase	yes	yes	—	—
DG Matrix (Cell-MV, roadmap)	yes	yes	—	—
Novos Power	yes	yes	—	—
Eaton (Resilient Power)	yes	yes	—	—
Sungrow (EnerNeo)	yes	yes	yes	—
Hyosung	yes	yes	partial	—
Alderbuck Energy	yes	—	partial	—
Zhonhen (Panama)	yes	yes	yes	—
JST Power Equipment	yes	yes	partial	—
ETH Zurich (research)	yes	yes	partial	—
EPFL + Navitas	yes	yes	partial	—
ABB (HiPerGuard, MV UPS)	yes	yes	yes	—
NC State / NYPA / EPRI (1 MVA research unit)	yes	yes	yes	—
Megmeet	—	—	—	—
Amperesand	—	—	—	—
GE Vernova	—	—	—	—
Hitachi Energy	—	—	—	—
Vertiv	—	—	—	—
Schneider Electric	—	—	—	—
Sinexcel	—	—	—	—

Figure M12 — The disclosure gap. Boundary: four disclosure fields per vendor scored as published, partial or absent, from the pinned sources only. “Evidence beyond an announcement” is scored from the evidence tier; “a listed unit” means a named certification for a data-centre MV converter. **The last column is empty for every vendor in the market.** Composed from megmeet-sst-briefing-data.json → classLedger.

9.3 Orders, evidence and the US footprint

For the SST specifically: nothing. There is no order, pilot, shipment, demonstration, tender or named customer anywhere, and the SST has never been exhibited: at the OCP Global Summit in 2025, Megmeet’s own investor record lists it as a roadmap item to match rather than a product shown.¹ No Megmeet paper or white paper on SSTs exists, and no Megmeet patent family for an SST or MV converter was located; the closest filing is a high-voltage energy-*harvesting* winding structure of July 2026, which is not an SST stage.¹

For the shipping business: real. GB300 volume orders were won and have contributed since the first quarter of 2026, via a US-headquartered ODM (original design manufacturer, the contract builder of the servers) to a North American cloud provider, neither of them named.¹ Vera Rubin samples are under test at several North American clouds, and an AIDC agreement with Pace Digitek was announced on 21 July 2026 with no value or scope disclosed.¹

The Dallas lab is real, and it is a shelf lab. Megmeet announced a new data-centre power testing laboratory in Dallas, Texas, on 26 June 2026, with 360 kW of active capacity, a roadmap to 1.5 MW and 800 V DC support, testing up to the 33 kW shelf and the 110 kW capacitor shelf.¹ Its address, square footage and headcount are undisclosed, and **the SST is not mentioned.**¹

The US footprint: the website and the filings differ. The established US entity, Megmeet USA, Inc., is in San Jose, California, and describes itself as sales, engineering, logistics and technical support, claiming no manufacturing.¹ The company's own About pages, however, place a 35,000 sq ft "U.S. manufacturing base" in the Fujitsu Industrial Park in Richardson, Texas, north of Dallas.⁷⁸ A Texas licensing record shows a 39,200 sq ft Megmeet renovation at 2821 Telecom Parkway, Richardson, registered in May 2024.⁷⁸ The HKEX application proof — the draft listing document for the company's planned Hong Kong listing — lists no US manufacturing base and describes the US subsidiary as sales and international operations, and nothing states whether the Dallas laboratory sits in the Richardson building.⁷⁸ The base the website describes is therefore located, but not in the filings.⁷⁸

ANALYSIS — TWO OBSERVATIONS THE RECORD SUPPORTS BUT DOES NOT STATE

At 360 kW on an 800 V bus, the Dallas laboratory as described **cannot energise a medium-voltage SST**. It is sized for shelves and sidecars, which is exactly what it says it tests. If the SST is to be proved on US soil, the question of *where* has not been answered publicly, and that is why it is question 5 on the week-one list.

Megmeet appears on NVIDIA's power-system-components tier, and that blog post **does not discuss solid-state transformers at all**: the naming is for rack and sidecar components.¹ No OCP membership listing for Megmeet could be confirmed, but the OCP member directory also returned HTTP 403, so that is an unverified negative rather than a confirmed one.¹

9.4 What the dossier now contradicts — v7 in the older prep documents, v8 in this briefing

The interview brief of 14 August 2026 was written from dossier **v2** and is five dossier versions stale; the study guide dates from 7 August.⁸ Neither file has been edited, because they are dated documents. The first table is the correction list for them. The second records where dossier v8 later contradicted this briefing itself.

What the older document says	What the current record says	Kind
"The verdict lands soon — H1 report ~27 Aug 2026 ... the first hard test."	It landed on 27 August and it split : power products +60.92% to RMB 1.841bn at an expanding 25.06% margin, but ex-non-recurring net profit -16.13% and operating cash flow -84.62%. ⁸	superseded by event
"Power products +67% YoY in Q1 2026 to ¥817M" as the bull datapoint.	The current figure is the half-year rate: +60.92% to RMB 1.841bn. ⁸	stale quarter
"Consensus embeds a ~6× FY2026 profit rebound premised on AI power."	Post-interim broker consensus is RMB 832M attributable net profit; H1 delivered 252M, about 30% of it, so brokers now model a materially H2-weighted year. No published beat-or-miss verdict on the interim was located. ⁸	refined, with a caution added · figure moved in v8 — see the next table
Segment names: smart home appliance controls · power products · NEV & rail · industrial automation · intelligent equipment · precision connection.	Current naming is 电源产品 power products · 智慧生活 smart living · 新能源交通 new-energy transport · 工业自动化 industrial automation · 智能装备 intelligent equipment · 磁电精造 magnetics and precision. And explicitly: there is no separate industrial-power reporting segment — industrial power sits inside power products. ⁸	renamed and clarified
"~40% of revenue earned overseas."	Two different numbers with two different meanings: H1 2026 <i>direct</i> overseas revenue was RMB 2.180bn, 35.97% of the total and +45.49%; direct plus indirect is above 43%. ⁸	refined
"8,894 employees at end-2025 (~3,100 in R&D)."	8,894 is still the filed figure at 31 December 2025, but R&D is now about 3,400 engineers, 34.6% of headcount, of whom more than 1,000 are AIDC-power technical staff . ⁸	moved
"Lite-On — #2, ~30%"; "Delta ... ~70% of Blackwell-platform PSUs."	Both are labelled trade and brokerage estimates in the current record, and Delta's is stated as brokerage-estimated 60–70%. ⁶⁹	tier of the claim
"Megmeet's expected first hyperscaler volume delivery is domestic — a Chinese hyperscaler, in 2026 ... North America is genuinely greenfield."	The current strategy read states that volume delivery to North American majors began in Q1 2026 . ⁸ Both statements are in the corpus and they are not obviously reconcilable.	direct tension — week-one question 6 · resolved in v8 — see the next table

What the older document says	What the current record says	Kind
The brief carries no market-cap or balance-sheet context.	About ¥24 in early 2024 → ¥190 intraday and about ¥94.7bn market cap on 3 June 2026 → three limit-downs in July 2026 → ¥108.71 on 29 July. Guarantee quota above ¥6bn, more than 50% of net assets, mostly to leveraged subsidiaries, flagged by sell-side as contingent risk. Controlling group stake 28.68% in 2020 → 23.20% in February 2026, mostly passive dilution. ⁸	new material
"The Huawei dossier still records this as a draft, China-specific rule ... and is stale." (the brief's own flag on the FCC action)	Discharged. The Huawei dossier now records the enacted FCC Covered List prohibition of 28 July 2026, the EU phase-out to April 2027 and the Lithuania remote-access bar. ⁷⁹	fixed
The FCC two-prong read — bidirectional <i>and</i> wireless — "is inference from the definition, not a sourced ruling".	Still true, and now better grounded: the definition does have two elements and both must be met, and an August 2026 update removed pure AC-to-DC rectifiers and off-grid inverters. ¹ The hedge stands.	still open — carry the hedge
The study guide: "SST — <i>the endgame product</i> ... >98.5% efficient ... this is what enables PUE below 1.1."	The SST is recorded as still in development , with no class disclosed anywhere and the PUE figure a company claim. ⁸	overclaim
The study guide: "~5% better end-to-end efficiency, and ~45% less copper" as a property of 800 V DC.	Those are NVIDIA's claims for the architecture against a legacy AC hall, and NVIDIA rates the SST and the MV rectifier <i>identically</i> . ⁶²	tier error
The study guide: "full 800 VDC facilities with 1 MW racks are projected from ~2027."	Option A is production Q3 2026, Option B deployment as soon as Q3 2027, Option C blocks <i>now</i> as TRUs, and MV-direct SST "toward 2029". ⁸⁰	date conflation
The study guide and lesson plan have no entry for TRU, ISOP, CHB, DAB, MFT, BIL, SSCB, HRMG, IMD/RCM or the 4.8 MW block.	That vocabulary is the whole 2026–27 engineering conversation, and chapter 1 of this document exists to fill it.	gap

Dossier **v8** was cut on the afternoon of 23 September, after this briefing was finished. It re-read every Megmeet filing and investor-relations record from September 2024 to August 2026, and both company websites, and six of its findings contradict statements in this briefing itself; a seventh bounds a lead that Appendix D.2 set aside.⁷⁸ When the briefing was rewritten for clarity that evening, the body was corrected at each place the first column names, and each correction cites dossier v8. The rows of the table above are annotated rather than changed, because that table is the record for the older documents. The data file's version of the footprint answer, which the companion shows, was corrected the same evening. This table stays as the record of what the briefing originally said and what changed. The superseding edition of the companion report, `sst-hall-edge-block-rev2--competitive--2026-09-23`, carries the same corrections.

What this briefing says	What dossier v8 records	Kind
Week-one question 6 and chapter 16.3, and the "direct tension" row above: "volume delivery to North American majors began in Q1 2026."	The interim dates the start of AIDC batch delivery to Q1 2026 across the whole customer chain — technology owners, system integrators and cloud operators — not to North America. The North America sentence is separate: batch delivery to 「部分北美大客户」 began in H1 2026, and the FY2025 annual report already recorded it by its 29 April publication date. ⁷⁸	premise corrected — week-one question 6
The same row and chapter 16.3: "North America is greenfield" against the Q1 delivery — "not obviously reconcilable."	They reconcile once volume is separated from references. The company says it was late on GB200 and won limited orders there, then won GB300 batch orders contributing from Q1 2026, and names no customer, citing confidentiality. ⁷⁸ A Goldman Sachs note relayed by Sina says the first GB300 order ran through a US-headquartered ODM to a North American cloud provider, neither named. ⁷⁸ North America has volume but no named reference win — "greenfield" is right about references and wrong about volume.	tension resolved
The consensus row above: "Post-interim broker consensus is RMB 832M attributable net profit; H1 delivered 252M, about 30% of it."	On 23 September, 15 institutions over six months carried a FY2026 mean of RMB 787M , in a range of 515–937M; H1's RMB 252.1M is about 32% of it, and RMB 133.9M of that H1 figure was non-recurring. Guosen cut its own FY2026 forecast to RMB 652M on 9 September. ⁷⁸ The conclusion — a heavily second-half-weighted year — stands, and is sharper.	figure moved

What this briefing says	What dossier v8 records	Kind
Chapter 13, the first objection: “give the footprint, and give it precisely: manufacturing across China, Thailand, India and Germany.” The data file’s version of the same answer, which the companion shows, adds “the US”.	The filings name six manufacturing bases: five in China and one in Thailand. India is served through local contract manufacturers, and Germany is an R&D centre in Bielefeld, not a plant. ⁷⁸ The precise footprint is manufacturing in China and Thailand, contract manufacturing in India, R&D in Germany , and a US base that only the company’s website describes (next row).	overclaim — the objection’s own word “precisely”
Chapter 9.3 and chapter 13: the US entity is Megmeet USA in San Jose, “no manufacturing claimed”; the US plant confirmed in November 2024 has a location and status “the company has never published”.	The company’s own About pages place a 35,000 sq ft “U.S. manufacturing base” in the Fujitsu Industrial Park in Richardson, Texas, north of Dallas. ⁷⁸ A Texas licensing record shows a 39,200 sq ft Megmeet renovation at 2821 Telecom Parkway, Richardson, registered in May 2024. ⁷⁸ The HKEX application proof lists no US manufacturing base and describes the US subsidiary as sales and international operations, and nothing states whether the Dallas laboratory sits in the Richardson building. ⁷⁸ San Jose remains the address of Megmeet USA, Inc.	located, but not in the filings
Chapter 14 and week-one question 10: the displaced-LITEON story is “unsupported” and left open as a question of internal position.	Now closed rather than open. The story traces to two early-2025 pieces that attribute it to market rumour, and the company deflected the question when asked directly in December 2024. Soochow (April 2026) expects Megmeet to become NVIDIA’s third NVL72 PSU source, after Delta and LITEON, and the “~41% Delta” figure attached to the story appears in no source. ⁷⁸ The Delta and LITEON dossiers were corrected on the same day. ⁸¹	closed — carry as settled
Appendix D.2: the 10 kV domestic / 35 kV international SST split “was left out of every table because the page could not be read.”	The page — ifeng, 1 July 2026 — has now been read. It attributes the split to the 20 May earnings call, and the exchange-filed record of that call calls the SST pre-research and contains no kV figure. ⁷⁸ It is carried in the dossier as a bounded lead and stays out of every table here, now for a better reason: the filed record does not support it.	bounded, still not carried

10 The SST competitor matrix — Megmeet against each

Chapter 6 gives the ledger by class. This chapter gives the head-to-head: what each competitor has that Megmeet does not, what Megmeet has that the competitor does not, and the one sentence to use about each. The first three columns are sourced. The last, *the one sentence*, is scripted language and is **analysis throughout**.

Competitor	What they have that Megmeet does not	What Megmeet has that they do not	The one sentence
Heron Power 34.5 kV · 4.2 MW · pre-production	The most completely specified hall-edge SST in the public record, at the class US campuses take. It uses thirty 140 kW cells, ten in series per phase: a third of the thirty-five that the primer's 1.7 kV assumptions give for this class, which is what a higher-voltage device and a lighter derating buy (and a reminder that chapter 6.2's counts are a ratio argument, not a bill of materials). It tolerates two cell failures per phase with sub-cycle bypass, and specifies UL-listed current-limiting fuses and a disconnect rated 40 kA at 34.5 kV, a 40-channel DC panel, a per-rack SSCB clearing in under 5 µs below 2 kA, and a battery on the 800 V bus. Heron also holds the only startup place on NVIDIA's facility-tier roster. ⁵	Revenue, a filed financial record, named Western OEM customers of long standing, and a shipping rack business; Heron has shipped nothing and does not reach mass production until late 2027. ⁵ Megmeet also has factories: six manufacturing bases, five in China and one in Thailand. ⁷⁸	"They have the specification and we have the factory. Neither of us has a listed unit."
Amperesand 3.3 kV devices · 4–10 MW · no unit energised	A ten-year validation lineage at NTU (Nanyang Technological University) with 500 kW and 1.5 MW units tested on the Singapore grid, full-power overload and bidirectional testing of a later generation, eighteen patent families, and a 3.3 kV silicon-carbide front end that roughly halves the cell count of a 1.7 kV design. ⁷²	Published datasheets. Amperesand publishes none, so its unit rating and input class rest on a supplier case study and trade-show reporting — and it publishes <i>no kV figure at all</i> . Also three chief executives in a year. ⁷²	"Strong device choice, long lab record, and you cannot get a datasheet."
DG Matrix shipping LV · MV dated 2028+	The only venture SST vendor shipping a commercial product, an Infineon silicon-carbide supply agreement, a yearlong GPU-load-response test programme with NVIDIA, and ABB and Mitsubishi Heavy Industries on the cap table. ⁶	Nothing at the hall edge — but neither does DG Matrix. Its shipping unit is a 480 V AC skid at 96–97% peak on its own datasheet, and its own CFO deck dates the MV unit to "2028+." ⁶	"They ship a low-voltage skid and market a medium-voltage one. Check which product is in the room."
Novos Power pre-product	Nothing that can be evidenced. ²⁸	Everything. Novos has 2–10 employees, no disclosed round, no Form D, no patent, no paper and no customer, and its claimed 48 kV input is above the 38 kV ceiling of the governing standard. ²⁸	"Know the name; do not price it."
Sungrow (EnerNeo) 10–13.8 kV · 3 MW · supplying	The only SST any filing describes as launched and supplying the market, with framework agreements for 30 MW and 100 MW, 312 kW/m ² , a 99.999% availability claim and a stated roadmap of field trials in 2026, batch orders 2027 and scale 2028. ³	A class that can serve a US hyperscale campus — neither has one, but Sungrow's ceiling is <i>published</i> at 13.8 kV, while Megmeet's is unpublished. Also: asked directly about North American sampling and UL progress, Sungrow left both unanswered. ³	"The most advanced SST in the world tops out at 13.8 kV. That is the state of the market, not a knock on them."
Zhonhen (Panama) 10 kV TRU · supplying in China	A six-year head start on one-stage MV-to-DC conversion at scale, the largest HVDC field record anywhere, and NVIDIA naming the Panama Architecture as one of three TRU families in its own execution paper. ⁷¹	A published US-facing rack business and named Western OEM customers. Zhonhen's exports are 4.1% of revenue, no US entity is on record, and it appears on none of NVIDIA's three rosters. ⁷¹	"Panama is a transformer-rectifier lineup, not an SST — and NVIDIA named the architecture, not the company."
Sinexcel samples, no formal sales	The only independent beat verdict among the Chinese interims this cycle, and a high-margin power-quality business with a genuine AIDC hook in its active voltage conditioner. ⁷⁶	A published 800 V DC product. The string "800V" does not appear in Sinexcel's 212-page interim, and management states four separate times that the AIDC products are samples with formal sales not yet realised. ⁷⁶	"They have said, four times, that it is not selling yet. Take them at their word."

Competitor	What they have that Megmeet does not	What Megmeet has that they do not	The one sentence
Delta Electronics 6.6–35 kV claimed · widest range	The deepest published 800 V DC catalogue in the industry, the widest disclosed MV range of any incumbent, and the only vendor claiming shipped SST units — “dozens in Asia, customer pilots underway in the US”, which is the vendor’s own claim relayed by trade press. ¹	Nothing at the block. At the shelf, Megmeet competes directly and is growing faster off a smaller base. ⁸	“Never attack Delta. Sell the second source during a re-qualification the buyer has to do anyway.”
LITEON no SST, no MV product	The battery-backup franchise — BBUs move from optional on GB200 to standard on GB300 — plus USD 919M committed to two McKinney, Texas plants and a target of 70% of capacity outside China by 2027. ⁸²	An SST in the published chain at all, and a first-mover position on the mainland sidecar. ⁸	“US capacity is announced, not producing — and they have no MV product.”
ABB 4.16–34.5 kV MV UPS · orderable	The only orderable solid-state medium-voltage product anywhere: 2.5 MW per unit to 25 MW paralleled at 98%, UL 1741 and the first of its kind to achieve UL 9540, with a 34.5 kV direct-grid-connect class and an installed base at Applied Digital’s North Dakota campuses. Plus the first IEC-certified solid-state circuit breaker. ⁷	An 800 V DC output. HiPerGuard’s output is medium-voltage AC — it is a UPS, and ABB sold its grid business to Hitachi before the supercycle, so it cannot supply the transformers its own campuses wait on. ⁷	“The most credible MV solid-state product in the market is a UPS, not a transformer.”
GE Vernova 13.8 kV reference designs	Three jointly developed NVIDIA AI-factory reference designs, an MV-UPS and rectifier catalogue, Prolec GE wholly owned, and the single most important commercial datapoint in the tier — a hyperscaler cost-share carrying a commitment to buy 1,000 SSTs from 2027 if a specification is met. ⁷³	A published product. GE Vernova has no dated SST product, no class and no rating on the record, and its stated first hyperscaler delivery of autumn 2026 has not been reported. ¹	“The only disclosed hyperscaler SST purchase commitment in the market belongs to a company with no dated product.”
Eaton owns SST IP	The best-hedged incumbent: it bought Resilient Power outright, published an 800 V DC reference architecture at OCP, owns the prefabricated-enclosure chokepoint and the thermal business, and states on its own earnings call that it is piloting nearly ten SST projects including with hyperscalers, with orders in H2 2026 and shipments from late 2027. ¹	A published specification. Eaton’s MVSST rating and class are trade-press only — its own catalogue page and brochure returned HTTP 503 to the research pass, so no vendor spec sheet was obtained. ¹	“If SSTs win, Eaton owns the technology; if not, it owns the skids.”
Schneider Electric no MV SST programme found	The reference designs, the digital twin, the cooling and a 1.2 MW-per-rack 800 V DC sidecar, plus a \$373M capacity-reservation agreement with Digital Realty. ⁷⁵	Nothing at the converter — the sidecar was still a prototype at GTC 2026 with no commercial date, and no Schneider MV SST programme was found. ⁷⁵	“Systems leader, defending the AC facility architecture rather than attacking it.”
Vertiv 34.5 kV stated as a goal	The demand-capture leader by backlog and the highest data-centre revenue concentration among large caps, with a full 800 V DC portfolio releasing in H2 2026 for a 2027 ramp. ⁵⁵	An SST. Vertiv’s own director of engineering states 34.5 kV to 800 V DC at 3–5 MW as a <i>goal</i> , and the shipping sidecar at 400–900 kW is not an SST. ¹	“The incumbent most architecturally exposed if conversion moves upstream — and they have said so in public, in the form of a goal.”
Hitachi Energy no SST product named	The scarcest input in the industry: MV and HV transformer capacity, roughly half of all HVDC projects ever built, and \$1bn committed to US manufacturing including a \$457M Virginia plant. ⁷⁴	An 800 V DC converter product of any kind. Hitachi Energy has none announced — and is separately quoted urging caution on compact 34.5 kV designs. ¹	“Moat and motive at once: their own transformer waits of 30–40 months are what created this market.”
Siemens + Reinhausen up to 36 kV · undated	A credible MV-magnetics partner and a class that covers 34.5 kV. ¹	Anything dated. No MW rating, no efficiency, no date and no NVIDIA mention — a follower posture, announced in August 2026. ¹	“Announced in August 2026 with no rating and no date.”

11 The six business units, and the position in each

Megmeet is neither an AI company nor an appliance company. It is a power-conversion platform pointed at six industries, and the six do not behave alike. The table ranks them by how defensible each position is on the evidence, not by revenue, because the biggest unit is the weakest. *Share* is each group's share of revenue and *GM* its gross margin.

Business group	Share	GM	The evidence	Who it is up against, and what decides the sale
Intelligent equipment — welding power sources 智能装备 · <i>Strongest in the company</i>	4.6%	39.67%	Megmeet claims the top share of China's robotic gas-shielded arc-welding power-source market for ten consecutive years since 2014 and about 30% share in 2020-21 — company claims on the company's own site, not an audited ranking. ¹ What is checkable is commercial: repeat framework deals with Honglu for 1,500 and then 1,800 robotic welding machines, integration with FANUC, ABB and KUKA, exports to 60+ countries. Highest gross margin in the company at 39.67% and rising. ⁸	Jasic, Riland, Shanghai Hugong domestically; Panasonic and Lincoln Electric among global brands present in Chinese rankings
Power products — AI data centre and network power 电源产品 · <i>Real, growing, and unranked</i>	30.4%	25.06%	The only mainland vendor NVIDIA named for GB200 NVL72 power and on both of the rosters NVIDIA published before it stopped naming vendors — the October 2025 ecosystem post and the August 2026 component tier; the company's own H1 2026 wording is "one of NVIDIA's designated recommended data-centre power suppliers" — membership of a set, not a rank. +60.92%, and the only one of the three largest segments whose gross margin expanded. No AI-data-centre revenue line is disclosed at any granularity. ⁸	Delta (the benchmark), LITEON (the second source), Flex, Bizlink, Lead Wealth at the shelf; Sungrow, Zhonhen, Sinexcel and the incumbents at the block above
Industrial automation 工业自动化 · <i>Credible, small, well behind the leader</i>	7.4%	27.78%	+39.85% in FY2025, the second-highest margin pool in the company at 27.78%. The company's own scope statement leads with servo and VFD (variable-frequency) drives, not PLCs and HMIs (the controllers and operator panels). The market is genuinely unconcentrated: across ten listed Chinese players, CR3 (the combined share of the top three) is reported at around 9% and CR10 at around 12%. ¹	Inovance is the reference point and is far larger with a much broader portfolio; INVT also named. No source places Megmeet on a ranked share table against Siemens, Schneider, Mitsubishi Electric, Yaskawa or Estun
New-energy transportation (NEV and rail) 新能源交通 · <i>Volume land-grab, margin-dilutive</i>	9.3%	13.46%	Revenue doubled in FY2025 (+108.65%) at the lowest gross margin of the major segments; 13.46% in H1 2026. More than a million OBC (on-board charger) plus DC-DC units shipped in 2025, combined. ⁸ Named OEMs: Geely, BAIC New Energy, Leapmotor, Changan, Dongfeng, FAW, Seres. ¹	VMAX, Enpower, Shinry, Fute lead the published OBC rankings — Megmeet appears on none of them
Smart living (appliance controls, smart bathroom) 智慧生活产品 · <i>Biggest unit, weakest position, deteriorating</i>	42.2%	18.39%	42.19% of revenue at 18.39% gross margin, down about 4.2 points in a year. It was the only segment that shrank in FY2025 (-4.8%). Named customers: Xiaomi, Haier, Hisense, Changhong, Skyworth. The smart-bathroom line is genuinely distinctive rather than a controller commodity. ¹	Topband at RMB 11.08bn of FY2025 revenue and H&T at roughly RMB 9.7bn are each about three times Megmeet's whole appliance unit, and are the acknowledged duopoly. Megmeet is third tier
Magnetics and precision manufacturing 磁电精造 · <i>Vertical integration rather than a merchant business</i>	5.0%	8.79%	8.79% gross margin, up from 5.1% but still the lowest in the company. The company describes it as an investment-and-integration period. ⁸ Shaped magnet wire, coaxial cable, ultra-fine flat wire and FFC/FPC (flat flexible cable and flexible printed circuit), feeding the company's own magnetics supply as well as external sales. ¹	No ranked competitor set located

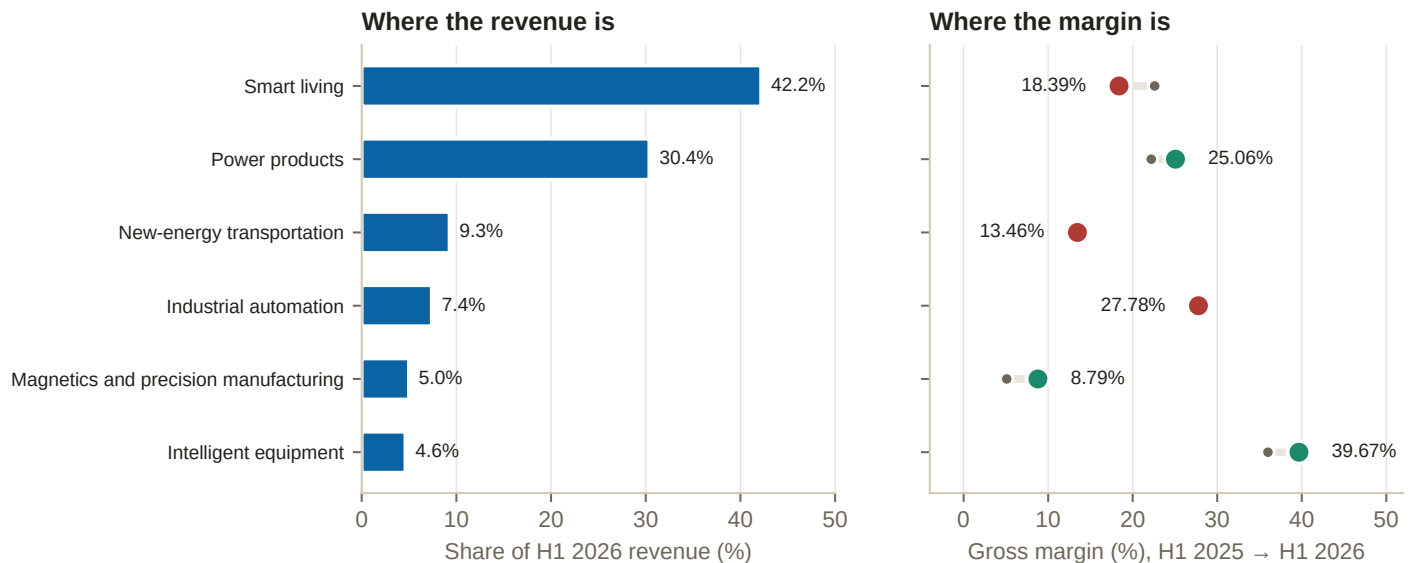


Figure M13 — Where the revenue is, and where the margin is. Boundary: H1 2026 interim, six months to 30 June 2026, RMB; the six named groups are plotted and a 1.14% “other” line completes the reported RMB 6.061bn total, which is why this restatement is the one used. The margin panel shows H1 2025 → H1 2026 as a movement, not a level. **Two panels rather than a dual axis**, which is never correct. Note the unit: 亿元 is one hundred million RMB — FY2025 group revenue is RMB 9.403bn, about USD 1.3bn, *not* USD 13bn. Composed from megmeet -sst - briefing-data.json → megmeetMix.

The six business groups, ranked by how defensible the position is

Intelligent equipment — welding power sources

4.6% of revenue · 39.67% gross margin · Strongest in the company

Megmeet claims the top share of China's robotic gas-shielded arc-welding power-source market for ten consecutive years since 2014 and about 30% share in 2020-21 — company claims on the company's own site, not an audited ranking. What is checkable is commercial: repeat framework deals with Honglu for 1,500 and then 1,800 robotic welding machines, integration with FANUC, ABB and KUKA, exports to 60+ countries. Highest gross margin in the company at 39.67% and rising.

[DOSSIER megmeet v7] [WEB, verified 2026-09-23]

Power products — AI data centre and network power

30.4% of revenue · 25.06% gross margin · Real, growing, and unranked

The only mainland vendor NVIDIA named for GB200 NVL72 power and on both published rosters; the company's own H1 2026 wording is “one of NVIDIA's designated recommended data-centre power suppliers” — membership of a set, not a rank. +60.92% at the only expanding gross margin among the three largest segments. No AI-data-centre revenue line is disclosed at any granularity.

[DOSSIER megmeet v7]

Industrial automation

7.4% of revenue · 27.78% gross margin · Credible, small, well behind the leader

+39.85% in FY2025, the second-highest margin pool in the company at 27.78%. The company's own scope statement leads with servo and VFD drives, not PLC and HMI. The market is genuinely unconcentrated — across ten listed Chinese players, CR3 is reported around 9% and CR10 around 12%.

[WEB, verified 2026-09-23]

New-energy transportation (NEV and rail)

9.3% of revenue · 13.46% gross margin · Volume land-grab, margin-dilutive

Revenue doubled in FY2025 (+108.65%) at the lowest gross margin of the major segments; 13.46% in H1 2026. More than a million combined OBC plus DC-DC units shipped in 2025. Named OEMs: Geely, BAIC New Energy, Leapmotor, Changan, Dongfeng, FAW, Seres.

[DOSSIER megmeet v7] [WEB, verified 2026-09-23]

Smart living (appliance controls, smart bathroom)

42.2% of revenue · 18.39% gross margin · Biggest unit, weakest position, deteriorating

42.19% of revenue at 18.39% gross margin, down about 4.2 points in a year. It was the only segment that shrank in FY2025 (-4.8%). Named customers: Xiaomi, Haier, Hisense, Changhong, Skyworth. The smart-bathroom line is genuinely distinctive rather than a controller commodity.

[WEB, verified 2026-09-23]

Magnetics and precision manufacturing

5.0% of revenue · 8.79% gross margin · Vertical integration rather than a merchant business

8.79% gross margin, up from 5.1% but still the lowest in the company. The company describes it as an investment-and-integration period. Shaped magnet wire, coaxial cable, ultra-fine flat wire, FFC/FPC feeding internal magnetics supply plus external sales.

[DOSSIER megmeet v7] [WEB, verified 2026-09-23]

Figure M14 — The six business groups, ranked by how defensible the position is. Boundary: the ranking is **analysis**; the revenue, share, margin and evidence beside it are sourced and tagged in the data file. Consultancy market-share figures are excluded entirely — two consultancies give the same appliance-controls competitor 13% and 77% of the same market, and neither is quotable. Composed from megmeet -sst - briefing-data.json → buLadder.

ANALYSIS — THREE THINGS THIS TABLE SAYS THAT NOBODY SAYS OUT LOUD

The company's single strongest competitive position is in welding, not in data centres. Intelligent equipment carries the highest gross margin in the company at 39.67%, and the welding line inside it is the only unit with a defensible leadership claim — supported not by a share number but by repeat framework deals for 1,500 and then 1,800 robotic welding machines and by certified integration with FANUC, ABB and KUKA. It is 4.6% of revenue.

The price war is in the biggest unit. Smart living is 42.19% of revenue at an 18.39% gross margin that fell about 4.2 points in a year, against two rivals each roughly three times its size. That is a share-defence position, and it is the wallet funding the AI bet.

The profit pools are not the big units. Intelligent equipment and industrial automation together carry the two best margins in the company and together are 12% of revenue. Any story about Megmeet that starts with the appliance business misreads where the company actually makes money — and any story that starts with AI data centres misreads where it currently earns it.

12 Policy and supply chain

Four regimes bear on a China-headquartered vendor selling medium-voltage power conversion into US AI infrastructure, and they do not fit together cleanly. Getting them right is worth more in a procurement conversation than any technical answer, because procurement is where this product line is most likely to be stopped.

12.1 The FCC Covered List — the binding one

On 28 July 2026 the FCC's Public Safety and Homeland Security Bureau added foreign-produced power inverters to the Covered List, implementing national-security determinations issued the previous day.¹ The definition has **two elements and a device must meet both**: it must be “a bidirectional power device or system that converts direct-current electricity to alternating-current electricity, or alternating-current electricity to direct-current electricity”, and it must contain components “enabling remote communication, control, sensing, data collection, or monitoring”.¹ **There is no voltage or power threshold.** A telemetered MV solid-state transformer is a literal instance of both elements.

Three things are commonly got wrong about it. **It is not a China rule.** “Foreign-produced” is defined by failure of the Buy American standard at 48 CFR §25.101(a) — generally US manufacture with domestic component costs above 65% for 2024–2028 — so it is a content test, not a nationality test, and a US-headquartered vendor building offshore is captured while a China-headquartered vendor building in the US in principle is not.¹ **It is prospective.** Models authorised before 28 July may continue to be imported, marketed, sold and used.¹ **There is a route out**, through conditional approval by the Department of War or DHS, with applications due by 1 January 2028 requiring ownership disclosure to 5% beneficial owners, a component-level bill of materials with country of origin, identification of who is responsible for software updates, and a time-bound US manufacturing plan with committed capital.¹

And one thing has changed since the primer: an August 2026 update **removed pure AC-to-DC rectifiers and off-grid inverters** from the list and added a 45X safe harbour — so a unidirectional rectifier-only architecture may sit outside the rule where a bidirectional SST does not.¹

12.2 Executive Order 14421 — and why it probably misses the hall edge

Executive Order 14421, “Declaring a National Emergency to Secure the United States Bulk-Power System”, was signed on 26 August 2026 under the International Emergency Economic Powers Act. It covers transformers, inverters, circuit breakers, generation turbines, reactors and battery storage, plus associated components, software, firmware, digital services, maintenance services and remote-access capability linked to a covered foreign entity.¹ Crucially for this product line, **it applies to transmission facilities rated 69 kV and above and local distribution is excluded.** DOE must issue implementing regulations within 120 days — by 24 December 2026 — and FAR revision recommendations within 180 days.¹

ANALYSIS — THE ASYMMETRY TO CARRY INTO A PROCUREMENT CONVERSATION

A 34.5 kV behind-the-meter hall-edge converter is probably *outside* EO 14421, because it sits on local distribution below 69 kV, and *inside* the FCC Covered List, which has no voltage threshold at all. The two regimes were written for different problems and do not line up. Saying this accurately, and saying which one you think binds and why, is a stronger position than either claiming exemption or conceding exposure — and it is a question for counsel and the certification body, which is a strength to say out loud rather than a dodge.

12.3 Tariffs, the EU, and what Megmeet has actually said

A Section 232 tariff of 50% on semi-finished copper and copper-intensive derivatives took effect on 1 August 2025 — copper windings being the second-largest bill-of-materials line in both a line-frequency transformer and an SST.²² Section 301 rates on certain Chinese imports rose from 1 January 2026, and a January 2026 Section 232 proclamation imposed an immediate 25% tariff on certain advanced semiconductor articles; **no transformer-specific or power-electronics-specific line item was located**, with corporate filings describing the exposure generically.¹ In the European Union, the Commission moved in April–May 2026 to restrict EU funding for projects using inverters from high-risk countries, phasing in from 1 November 2026 with new contracts fully incorporating the restrictions from April 2027.¹

Megmeet’s own language on tariffs is direct: activating Thailand factory capacity can, to a large extent, avoid the US tariff problem.¹ It also states that US sanctions and export-control regimes may involve certain of its customers and suppliers.¹ No disclosure on FEOC (the US “foreign entity of concern” category) or on Section 889 (the federal procurement ban on certain Chinese telecommunications equipment) appears anywhere in its filings.¹ And on listings: no UL or ETL listing number is disclosed for any Megmeet data-centre product.¹ The company claims UL, TÜV and CNAS *laboratory accreditations*, which are a credential for its in-house testing, not a listed product.¹

THE REFRAMING NUMBER

Megmeet stated in April 2025 that direct exports to the United States were **under 3% of total revenue**.¹ The North American data-centre push is therefore a new build-out, not the scaling of an existing US business — which is the honest way to describe the territory to anyone who asks, and a more defensible position than implying continuity that does not exist.

PART V

The sales layer

Analysis throughout. Nothing in this part is a Megmeet position, a company statement, or anything other than one reading of the evidence in Parts I to IV.

SCOPE NOTE FOR THE WHOLE OF PART V

Every chapter in this part is **analysis**. The objections are built from the evidence in Parts I–IV and from the objection set in the August 2026 interview brief, whose format this follows; the answers are one reading of that evidence, not guidance from anyone at Megmeet. Where an answer introduces a fact that appears nowhere else in this document, it carries its source number here. Where it restates a fact established in Parts I–IV, which is most of them, the number sits where the fact is established and the answer does not repeat it, because a sales script bristling with citations is not a sales script. The exception is the dossier v8 corrections listed in chapter 9.4: each carries its number wherever it is applied. Nothing in this part is evidence that is not already in the four parts above it.

13 The objections, and the strongest honest answer to each

Seven objections a US data-centre buyer raises about a China-headquartered SST vendor. With every one of them, the strongest move is to raise it yourself before they do.

What they say	What they are really asking	The strongest honest answer	What never to say
"You are a Chinese supplier — will procurement or legal block this after I have spent a qualification cycle?"	Am I going to waste six months?	Answer with the actual regime, not with reassurance. The binding US rule for this product class is the FCC Covered List of 28 July 2026, and it has two prongs that must both be met: a bidirectional AC-DC converter, and components enabling remote communication. It is a content test, not a nationality test: "foreign-produced" means failing the Buy American standard at 48 CFR 25.101(a), so a US-headquartered vendor building offshore is captured too. ¹ Then give the footprint, and give it precisely: manufacturing in China and Thailand, contract manufacturing in India, and R&D in Germany. ⁷⁸ On US soil there is a 35,000 sq ft "U.S. manufacturing base" in Richardson, Texas, that only the company's own website describes; the filings do not list it. ⁷⁸ There is also a Dallas-area test laboratory, and the registered US entity, Megmeet USA in San Jose, describes itself as sales and engineering and claims no manufacturing (chapter 9.3). ¹ Then the proof that actually lands: Ericsson, Cisco, Juniper, Arista and Accton already buy Megmeet power and have already run their supplier audits. ⁸	<i>Never promise a regulatory outcome, and never say the rule does not apply. Say which prong you think you fall outside of and why, and say it is a question for counsel and the certification body.</i>
"What is your input voltage class?"	Can you even serve my campus?	This is the one you cannot talk your way around, and pretending otherwise is the fastest way to lose an engineer. The published record carries no class for Megmeet's SST. The honest answer on day one is: the sidecar and the rack products are specified and shipping, the converter is under development and the class is not published yet — and then ask what class their campus takes, because that is the answer you need to bring back internally. Since the OCP specification, the sharper version is: which SKU is this campus — the 13.8 kV one or the 34.5 kV one?	<i>Never infer a class from Chinese grid norms. A third-party report circulating a 10 kV domestic / 35 kV international split is exactly that inference, the filed record of the call it cites does not support it, and 35 kV is not a US class.⁷⁸</i>

What they say	What they are really asking	The strongest honest answer	What never to say
"We have never deployed you at this scale."	Am I the guinea pig?	Concede the specific and redirect to the general: new to hyperscale MV conversion, not new to high-volume power manufacturing. Then make the structural point: standardised form factors let a buyer take a limited, low-risk slot first. At the rack that is literally true: a CRPS module fits any compliant chassis.	<i>Never claim an installed base at the hall edge. Nobody in the industry has one — no covered vendor has an energised, named-site, hyperscaler MV SST, and saying so is more credible than implying otherwise.</i>
"Delta already has this socket."	Why re-open a qualification that works?	Never attack Delta — they are good and the buyer knows it. Sell the second source: the concentration is a risk they already manage elsewhere in the bill of materials. Then sell timing: the architecture change forces re-qualification anyway, so the switching cost you are asking them to absorb is one they are already absorbing.	<i>Never use a share number. Every server-power share figure in circulation is a trade or brokerage estimate, and the buyer will know which ones are contested.</i>
"Your financials look shaky."	Will you still be here mid-programme?	Do not flinch: it is public and they have read it. Profit fell because the company chose to spend ahead of revenue. H1 2026 power products grew 60.92% and was the only one of the three largest segments whose gross margin expanded, and the diversified base across six business groups is why the AI bet does not have to work on the first try. Then give them the number that is genuinely uncomfortable, and let them see you know it: profit excluding non-recurring items fell 16.13% in the same half, and operating cash flow fell 84.62%.	<i>Never quote the headline +45.21% without the ex-non-recurring -16.13% beside it. An analyst will have both, and offering only the first one costs more credibility than the second one costs goodwill.</i>
"What if 800 V DC slips?"	Am I buying a roadmap?	Point at the bridge. The sidecar exists because buildings on 380-480 VAC need megawatt racks now, and the near-term catalogue sells into today's architecture regardless. NVIDIA's own staging has the power rack in production in H2 2026 and the row power center in 2027 — neither needs an SST. The roadmap is upside, not the thesis.	<i>Never cite the 2029 SST date as if it were a commitment to buy one. It is a date attached to a next-generation architecture in a paper that names no vendors.</i>
"Who else has one running?"	Show me operating hours.	The honest answer is that at megawatt scale on a US feeder there is essentially one: a 1 MW research unit from NC State with the New York Power Authority and EPRI, validated on a real distribution feeder, announced August 2026. Everything else is a pilot, a framework agreement or a claim. Say that, and then say what your own first article would look like and who would witness it.	<i>Never let a framework purchase agreement be described as a deployment. Sungrow's 30 MW and 100 MW frameworks are the largest committed volumes anywhere and no unit has been evidenced energised.</i>

14 What not to say in the first month

Ten things that sound knowledgeable and are wrong. Each is a sentence said by someone who has read one article, and each can be corrected by someone who has read two.

Do not say	Because
"An SST is about 5% more efficient."	That is NVIDIA's claim for the 800 V DC architecture against a legacy AC hall it puts at under 90% — and NVIDIA rates the SST and the MV rectifier identically at 98.5% or better. The SST's case is stage elimination, footprint and control. ⁸³
"The bus is plus-minus 400 volts."	NVIDIA specified single-ended 800 V — positive, return, protective earth — and rejected bipolar for lack of three-pole DC breakers. ¹² Plus-minus 400 V is the OCP variant the rack can also accept. ¹ The OCP SST specification itself is 800 V DC unipolar at the converter's output. ⁸⁵ The published architectures genuinely diverge, and a vendor without a side fails the first five minutes.
"Zhonhen's Panama / ABB's HiPerGuard / Vertiv's PowerDirect is a solid-state transformer."	They are a transformer-rectifier lineup, a solid-state medium-voltage UPS and a rack DC shelf respectively. ⁸⁴ NVIDIA's own paper names the Panama Architecture as a TRU implementation — as an architecture, not as a company. ⁵⁴
"Abilene is served at 34.5 kV."	Abilene's Oncor interconnection is 345 kV transmission and the campus distribution class is undisclosed. One decimal point turns a transmission fact into a fabricated service-class finding, and it is the single most likely error to introduce. ¹
"Oracle is designing for 800 V DC."	That is NVIDIA's characterisation of OCI, not an Oracle statement. Oracle has published nothing on 800 V DC, DC distribution, MV conversion or solid-state transformers. Quoting it back to an OCI engineer as an Oracle position would be a mistake. ¹
"We are NVIDIA's named SST partner." (or anyone is)	NVIDIA's ecosystem page names no vendor as an SST vendor and does not break the roster into rectifier or SST sub-categories. ¹ Megmeet's own filing says "one of NVIDIA's designated recommended data-centre power suppliers" — membership of a set. ⁸
"Megmeet displaced LITEON as the number-two NVIDIA power-shelf source."	The question is now closed, and the record does not support the story. It traces to two early-2025 pieces that attribute it to market rumour, and the company deflected the question when asked directly in December 2024. ⁷⁸ Soochow (April 2026) expects Megmeet to become NVIDIA's third NVL72 power-supply source, after Delta and LITEON, and the "~41% Delta" figure attached to the story appears in no source. ⁷⁸ The company has never claimed it, and the H1 interim names no competitor across 238 pages. ⁸ The one contemporaneous supplier account names LITEON second, and two research houses covering the same market in mid-2026 name Delta and LITEON without mentioning Megmeet. ⁶⁹
"Megmeet's revenue is about thirteen billion dollars."	FY2025 revenue is RMB 9.403bn, about USD 1.3bn. Chinese filings quote 亿元 — hundreds of millions — and machine translation renders it as "billion" with depressing regularity. Getting a company's own revenue wrong by 10x in the first month is not recoverable. ⁸
"The SST relieves the transformer shortage."	Partially at best. It removes the 480 V layer, but not the utility service transformer where the utility owns it, nor the MV switchgear, cable or substation — and it trades cores of grain-oriented electrical steel (the specialised steel of transformer cores) for medium-frequency cores and hundreds of SiC modules, on a supply base a fraction of the transformer industry's scale. ²²
"It is UL listed." (of anything at the 800 V DC bus)	As of the most recent analyst survey no vendor had completed UL certification for data-centre SST deployment, and the most quotable line from PCIM Europe 2026 is that there is no specification and no UL certification for the 800 VDC bus, and that this is a major gap. ¹

15 The ten week-one questions, ranked

Ranking criterion: decision leverage — how many of the other answers in this brief would have to be rewritten if the answer came back other than expected, not how interesting the question is. The order means that if you get only three answered in the first week, these are the three.

#	The question	What the answer changes
1	What service-voltage class is the SST being designed to, and is it one product or two?	Everything. It decides whether Megmeet is in the hall-edge contest at all, which US campuses are addressable, and whether the cell count is a 15 kV-class or a 35 kV-class bill of materials — a factor of 2.3× to 2.7× in cells, magnetics, gate drivers and control channels, depending on which 15 kV-class voltage the comparison starts from. The buyers' half of the answer is now published: the OCP specification has a 13.8 kV SKU and a 34.5 kV SKU, so the internal question is which of the two Megmeet is building, or both. ⁸⁵
2	Is there a target date for a first article, and is there a witness — a customer, a lab, or an NRTL (a nationally recognised testing laboratory, such as UL)?	It separates a product programme from a roadmap slide. Nobody in the industry has a listed unit, so the first vendor with a witnessed first article at a named class takes the layer's narrative.
3	Which listing path are we on — UL 1741 with supplements, UL 347A, UL 2877, IEC 62477-2 — and who is the NRTL?	Certification is 6–18 months and mid-six figures per product on the one published estimate located — a certification body writing about the market it sells into, so read the range as its floor rather than its centre ¹ — and each variant recertifies. It sets the earliest possible US revenue date more firmly than any engineering milestone.
4	Where does the FCC Covered List analysis land for the sidecar, the shelves and the SST — and who has written it down?	The rule has no voltage threshold and two prongs. A unidirectional rectifier with wired management plausibly sits outside; a bidirectional, telemetered SST plausibly sits inside. If nobody has written the analysis, that is the first thing to cause to happen.
5	What is the Dallas lab actually for, and what is its ceiling?	It is 360 kW today with a 1.5 MW roadmap — which is a shelf and sidecar validation facility, not somewhere an MV converter can be energised. If the SST is to be proved in the US, the question is where.
6	What does the batch delivery to North American customers that began in the first half of 2026 actually consist of, and who are they?	Dossier v8 separates two things the older record ran together. AIDC batch delivery began in Q1 2026 across the whole customer chain, while batch delivery to “some large North American customers” began in H1 2026, and a Goldman Sachs note relayed by Sina says the first GB300 order ran through a US-headquartered ODM to a North American cloud provider, neither named — a brokerage account, at second hand. ⁷⁸ So North America has volume but no named reference win. ⁷⁸ The answer decides whether the job is building a first proof case or scaling an existing book, and whether any of that volume can be turned into a reference.
7	What is the overload specification, the part-load efficiency curve, and the MTBF or FIT number for the converter?	Nobody in the industry publishes any of the three. The OCP specification now sets the buyers' numbers for two of them: 120% for 5 s and 150% for 150 ms, and at least 98% from 50% to 100% load. ⁸⁵ Whoever publishes first owns the engineering conversation — and if we cannot answer internally, we cannot answer an NVIDIA or OCI engineer either.
8	What is the service model — vendor field engineers or the owner's electricians — and what is the spares strategy and the warranty term?	Only one vendor in the entire research pass publishes a warranty at all. For a first-of-a-kind MV asset the commercial terms are the product, and an owner's engineer will ask before an electrical engineer does.
9	Are we in the OCP LVDC SST specification work, and do we have v0.3? Are we in OCP's MV AC to 800 V DC workstream, and have we commented on Revision 0.3.0?	It is the vocabulary every counterparty will use and more than 80 manufacturers are reported to be building to it. It could not be retrieved in this run because opencompute.org refused every request — so the first practical task is to get the document. The document is in hand as of 24 September. Revision 0.3.0 is marked as a first draft for the OCP community, and the announcement invites suppliers to get involved, so the question is whether Megmeet will shape Revision 0.4 or only read it.
10	Has anyone inside been asked to repeat the displaced-LITEON story, and does the internal answer match the settled external one?	Least leverage on the market, most on personal credibility. The external record is now settled: the story traces to early-2025 market rumour, the company deflected it when asked in December 2024, and Soochow expects Megmeet to become NVIDIA's third NVL72 power-supply source. ⁷⁸ Confirming that the internal answer matches is worth doing before the first customer meeting.

16 Everything this document could not determine

Named, not smoothed over. Each of these is a real hole, and several are holes in the market rather than in the research, which is a different and more useful kind of finding.

16.1 Holes in the record that no amount of research can close

- **Megmeet's SST service-voltage class.** Zero kV mentions across thirty-eight pinned dossier sources and zero hits in a four-filing text scan of the company's own disclosures. This is not a research failure; it is the exact limit of Megmeet's own disclosure.¹
- **Any audited AI-data-centre power-conversion revenue line, from anyone.** No company in the covered set discloses one, which is why every market-share figure in circulation for this layer is a trade or brokerage estimate.⁶⁹
- **Any public apples-to-apples \$/MW comparison of an SST against a transformer-plus-rectifier for a US data centre.** None exists; the fragments that circulate are vendor models with vendor-chosen boundaries, none audited on a delivered project.⁷⁰
- **An MTBF or FIT figure for a complete MV converter, an overload curve, or a part-load efficiency curve.** No vendor publishes any of the three.¹ The OCP specification now sets buyer targets for the overload and the part-load efficiency, and no vendor publishes against either.⁸⁵
- **A warranty term from any hall-edge vendor except one.** Enphase's 10-year limited warranty is the only one located across the entire pass.¹
- **Any spares list, stocking level or spare-cell price for an MV SST.** None published by anyone.¹
- **Insurance or bankability treatment of a novel MV asset.** No insurer, reinsurer, broker or owner's-engineer standard naming solid-state transformers was found.¹
- **Whether NERC CIP attaches to a behind-the-meter hall-edge SST.** Addressed by no source located.¹
- **Any US authority-having-jurisdiction precedent for MV switching equipment inside an operating data hall.** None located — probably the largest permitting unknown for facility-level SSTs.⁴⁹
- **Any field-failure, forced-outage or availability data from an operating MV data-centre SST.** None exists to find, because there is no installed base.¹

16.2 Specific questions asked and not answered

- **Amperesand's voltage class.** No kV figure anywhere on its own site — “configurable MV AC and LV DC” only. A real hole, since it is one of the four pure-plays.⁷²
- **GE Vernova's class, rating, and the identity of its hyperscaler.** Only the autumn-2026 delivery date is public, and that delivery has not been reported.¹
- **The MV service class at New Albany, Mt Pleasant, Richland Parish, Memphis or the Abilene campus itself.** Nothing disclosed for any of them.¹
- **Whether any SST has been energised at a named hyperscaler site.** None found. Every hyperscaler-adjacent datapoint is intent, ecosystem membership, or an unnamed counterparty.¹
- **Eaton's MVSST specification.** Its own catalogue page and brochure returned HTTP 503 to the research pass, so its class and rating remain trade-press only.¹
- **Whether Megmeet is in OCP membership or the LVDC SST specification work.** Not found, but the OCP member directory also returned HTTP 403, so this is an unverified negative rather than a confirmed one.¹ The specification cannot answer it either: its version history lists authors from Google, Microsoft and NVIDIA only.⁸⁸

- **Megmeet's FY2025 gross margin by segment beyond the appliance line, its absolute R&D spend for FY2025 and H1 2026, and any named US customer for any product line.** None located.¹
- **Whether the US plant Megmeet confirmed in November 2024, the Richardson base and the Dallas laboratory are the same thing.** The company confirmed a US factory and never named its location, capacity or timeline in a filing; the Dallas laboratory is separately and firmly evidenced by the company's own June 2026 release.¹ Dossier v8 has since found a 35,000 sq ft "U.S. manufacturing base" in Richardson, Texas, on the company's own About pages, but the filings list no US manufacturing base and nothing states whether the Dallas laboratory sits in the Richardson building.⁷⁸ Nothing in the record ties that base to the factory confirmed in November 2024, and its capacity and timeline are still unpublished.

16.3 Contradictions flagged and deliberately not resolved

- **"North America is greenfield" against "volume delivery to North American majors began in Q1 2026" — since resolved.** Both statements were in the corpus, from the August interview brief and the September dossier respectively.⁸ Dossier v8 reconciles them by separating volume from references: the Q1 2026 date covers AIDC batch delivery across the whole customer chain, batch delivery to some large North American customers began in H1 2026, and no customer is named.⁷⁸ North America has volume but no named reference win, so "greenfield" is right about references and wrong about volume.⁷⁸ Week-one question 6 now asks what that volume consists of.
- **DG Matrix's own 12–34.5 kV banner against an analyst account that it ships LV-input skids first.** Its own datasheet settles it in the analyst's favour, but both claims are live in the market.⁶
- **Who acquired Resilient Power.** Eaton's own newsroom states Eaton completed it in August 2025; a paid market-research source asserts Vertiv acquired it in July 2025. Eaton's release settles it, and the wrong version is circulating in paid output.¹
- **Hitachi Energy as simultaneous SST investor and 34.5 kV sceptic.** Its own release announces support for NVIDIA's architecture and names no SST product or class; trade press then reports it urging caution on compact 34.5 kV designs. Only the release is a primary source.¹
- **Megmeet's FY2024 appliance revenue does not reconcile with FY2025's.** The segments were almost certainly restated when the business groups were renamed; the inconsistency is flagged rather than resolved.¹
- **NOGRR 282, two sets of corner points.** Chapters I.2 and 7 give ERCOT's test from web research as 2 s at 0.85 pu and 150 ms below 0.35 pu.¹ The OCP specification, citing the NOGRR 282 update of 7 January 2026, plots ERCOT's curve with corners at 0.9 pu for 2 s, 0.8 pu for 500 ms, 0.5 pu for 250 ms and 0.2 pu for 150 ms, and 1.2 pu for 2 s on the high side.⁸⁶ The two may describe different versions of the rule or different boundaries of it; check the current NOGRR 282 text before quoting either.^A
- **The specification's own dates.** Its cover says effective 22 June 2026, its version history dates Revision 0.3 to 20 May 2026 as a first draft, and one page footer still reads 05/20/2026.⁸⁸

16.4 What was blocked, and what it cost

Four hosts refused this research pass, and each refusal cost something specific. **opencompute.org returned HTTP 403 to every attempt by two tools**, which blocked the OCP LVDC Solid-State Transformer Specification v0.3 — the single most important primary document for this subject. ~~Everything this briefing says about its contents is second-hand and flagged as such.~~¹ Resolved on 24 September: the reader supplied the specification and its announcement, chapter 3.5 now reads them first-hand, and the second-hand statements elsewhere are corrected in place and listed in Appendix E.⁸⁸ **eaton.com returned HTTP 503** on both the MVSSST catalogue page and its brochure, so no Eaton specification was obtained at all.¹ **intertek.com returned 403**, so the UL 347A and UL 2877 scope statements rest on a search-index summary rather than on the certifier's own page.¹ **ferc.gov returned 403**, so every FERC fact in this document is law-firm-mediated.¹

ONE METHODOLOGICAL CAVEAT WORTH KNOWING

Several standards-mapping claims in chapter 7 rest on a niche newsletter that has itself published a self-correction about conflating announcements with deployments.¹ The research pass did not record which sentences those are, so they cannot be marked one by one: before you quote a web-sourced standards claim from chapter 7, check it against the standard itself.^A One figure in particular, an NEC Article 706 “100 V DC default”, is uncorroborated and is used nowhere in this document; the inspectors¹-association article that was reachable makes no mention of 800 V DC at all, which is consistent with a gap but is not positive confirmation of it.¹

APPENDIX

Glossary, flashcards, sources and colophon

The term system alphabetically, the printed deck, every source by tier, and the record of how this document was made.

A Glossary — the term system, alphabetical

AFE — active front end · Control

A rectifier built from controlled switches rather than diodes. It draws sinusoidal current at unity power factor (current in step with voltage), can supply reactive power, and can be programmed to follow a ride-through curve.⁴⁶ — **IEEE 519 limits total voltage distortion to 5% at the point of common coupling, with no individual harmonic above 3%**²³

BIL — basic insulation level · Magnetism

The lightning or switching impulse voltage a piece of equipment must withstand. It is set by the equipment class in the ANSI C84.1 standard, not by the vendor.³⁹ — **15 kV class = 95 kV BIL; 25 kV class = 125 kV; 35 kV class = 150 kV**⁴

CHB — cascaded H-bridge · Topology

A multilevel converter built from single-phase full bridges (H-bridges) connected in series. It is the standard way to face medium voltage with low-voltage semiconductors: stack enough cells and each carries only its share of the line.¹⁷ — **13.8 kV needs 14–15 cells per phase with 1.7 kV devices; 34.5 kV needs about 2.5× as many**³³

CLLC / LLC · Topology

Resonant isolated DC-DC topologies. A resonant tank circuit (the inductors and capacitors that give the names their Ls and Cs) lets the switches turn on and off at zero voltage or zero current, which cuts switching loss; CLLC is the bidirectional form.³⁵ — **NVIDIA specifies a 64:1 LLC with a matrix transformer to go from 800 V straight to 12 V inside the rack**¹²

Cosmic-ray derating · Devices

Atmospheric neutrons, produced by cosmic rays, can cause single-event burnout in power devices held at a high electric field, so each cell's DC-link voltage is set well below the device's rating.⁴¹ — **The customary derating is about 0.55 × device rating — the factor behind every cell-count figure in this brief**¹

DAB — dual active bridge · Topology

An isolated DC-DC converter with an active full bridge on each side of the transformer. Power flow is set by the phase shift between the two bridges' square waves, so it can run in either direction by construction.³⁴ — **5–50 kHz switching**³⁵

DC arc flash · Standards

The explosive release of energy when an arc strikes on a DC system. NFPA 70E 2027, the US workplace electrical-safety standard, names the hazard, and no standard can yet calculate it: IEEE 1584-2018, the arc-flash calculation method, covers AC only.⁴⁹ — **70E 2027 adds Article 310 with DC thresholds; the NFPA research project aims its model at 70E 2030 — a three-year gap**¹

Fail-short · Devices

The property a die (a single semiconductor chip) in a series stack needs: when it fails it must keep conducting, so the stack stays up until the cell can be bypassed.⁴² — **Oak Ridge National Laboratory (ORNL) calls SiC fail-short in series stacks "an open research challenge"**⁴²

Grid-forming · Control

A converter that sets the voltage and frequency rather than following them; this includes black start, restarting a network that has gone dead.⁵ — **Heron claims IEEE 2800 and ERCOT NOGRR 282 compliance with under 1% ripple injected at MV**⁵

HRMG / HRRG · Protection

High-resistance midpoint grounding and high-resistance return grounding: two of the four schemes under evaluation for connecting a two-wire 800 V DC bus to earth, alongside floating (no ground connection) and solid grounding.⁴⁴ — **Four candidates; the paper leans towards HRMG**⁴⁴

IEC 62477-2 · Standards

The international safety envelope for MV converters: 1 kV AC / 1.5 kV DC up to 36 kV AC / 54 kV DC. Edition 2 went to CDV (committee draft for vote), with voting closing 13 March 2026.¹ — **36 kV AC ceiling**¹

IMD / RCM · Protection

Insulation monitoring device and residual current monitor, two ways of detecting current leaking to ground. The facility zone uses IMD/IRM, which raises an alarm without shutting down; the rack interface zone prefers RCM for fast leakage detection.⁴⁵ — **Two protection zones**⁴⁵

ISOP — input-series, output-parallel · Topology

The connection pattern of an SST: cells stacked in series on the medium-voltage input, so each sees a fraction of the line voltage, and tied in parallel on the low-voltage output.³¹

MFT — medium-frequency transformer · Magnetics

The kilohertz transformer inside each SST cell. It is small because the volt-seconds it must carry in each cycle fall as the frequency rises. It is demanding because it must hold medium-voltage insulation in that small volume while the fast-switched square waves of pulse-width modulation (PWM) stress it.³⁸ — **Raising f from 60 Hz to 10 kHz shrinks core area by roughly 170×; a 4 MW unit weighs about a fortieth of its 60 Hz equivalent — Infineon's comparison is 20 tonnes to about 500 kg**¹⁰

MMC — modular multilevel converter · Topology

A multilevel converter built from half-bridge cells and used in HVDC (high-voltage DC) transmission; an alternative front end to the CHB at higher voltages.³⁶ — **N+1 redundancy (one spare cell beyond those needed) raises a modular multilevel drive's MTBF (mean time between failures) by about 1.7× — the one independent redundancy number available**¹

~~OCP LVDC SST Specification v0.3~~ **OCP SST Specification, Rev. 0.3.0 · Standards**

The buyers' black-box specification for a megawatt-class converter from MV AC to 800 V DC, by Google, Microsoft and NVIDIA, effective 22 June 2026.⁸⁸ — **SKU A 13.8 kV / 5 MW; SKU B 34.5 kV / 5 or 10 MW; at least 98% from 50–100% load**⁸⁵

PCC — point of common coupling · Grid interface

Where the customer's installation meets the utility's system, and where IEEE 519 harmonic limits are assessed.⁴⁸ — **Limits tighten at higher voltage and at a lower short-circuit ratio, that is, on a weaker grid**⁴⁸

PD — partial discharge · Magnetics

Small, localised electrical breakdown inside insulation. It does not bridge the electrodes, but it erodes the insulation over time, and the very fast voltage swings (high dv/dt) of wide-bandgap devices such as SiC drive it.²⁰ — **A 35 kV interface needs roughly 100 kV of insulation — "three times", in TDK's assessment**²⁰

Ride-through · Control

A load's ability to stay connected through a voltage or frequency disturbance instead of tripping.²³ — **NOGRR 282: 2 s at 0.85 pu, 150 ms below 0.35 pu, no more than 150% current, 90% recovery within 2 s, six sags in 90 s**¹

Service-voltage class · Grid interface

The equipment class, under the ANSI C84.1 standard, of the utility feed a site takes. It sets insulation, BIL and cell count — and therefore the product.⁴⁷ — **12.47/13.2/13.8 kV = 15 kV class; 24.9 kV = 25 kV class; 34.5 kV = 35 kV class; gigawatt campuses tie in at 69-345 kV**⁴

SiC — silicon carbide · Devices

A wide-bandgap semiconductor: its wider energy gap lets a device block more voltage and switch faster than one made of silicon. SiC makes 1.2–3.3 kV MOSFETs (the transistor type used as the switch) practical at kilohertz switching, and it is the enabling device of the SST.⁴⁰ — **Production classes 1.2, 1.7 and (from few suppliers) 3.3 kV; 6.5 and 10 kV exist as samples. SiC fell from over \$10/A (dollars per ampere of rating) in 2018 to \$2–3/A in 2025**⁴⁰

SSCB — solid-state circuit breaker · Protection

A semiconductor switch that interrupts DC fault current in microseconds. It is needed because DC has no natural current zero, the moment in every AC cycle that a mechanical contact exploits to put out its arc.¹⁹ — **NVIDIA targets 125 A air-cooled and 1250 A liquid-cooled solid-state breakers, with moulded-case circuit breakers (MCCBs) as the Day-1 branch device**⁴³

SST — solid-state transformer · Topology

A power-electronic converter that provides a transformer's two functions — changing the voltage, and galvanic isolation, meaning no direct electrical path between input and output — through medium-frequency magnetics, with controllable AC-DC and DC-DC stages on either side.³² — **97–98.5% efficiency for MV-to-DC units; 99.0–99.5% for a good 60 Hz distribution transformer alone**¹⁸

The 4.8 MW block · Grid interface

NVIDIA's standardised DC power block for a data hall: medium voltage in, a 6000 A-class DC switchboard, parallel 1250 A busways (enclosed bars that carry power along the row) and 4+1 catcher redundancy through a DC static transfer switch.²⁴ — **4.8 MW per block, 20 MW deployment units of four scalable units**²⁴

TRU / MV rectifier · Topology

A conventional transformer stepping medium voltage down to low voltage, feeding a rectifier — diode, thyristor or active — to produce 800 V DC.³⁷ — **NVIDIA's named near-term path, mature from electrolysis, rail and mining. NVIDIA rates the MV rectifier and the SST identically, at 98.5% or better and as large as 7.5 MVA²**

UL 1741 / 347A / 2877 · Standards

The US listing routes: the product-safety certifications a US inspector looks for. UL 1741, with supplements SA and SB, is the dominant path for inverters and converters; UL 347A and UL 2877 cover medium-voltage power conversion from 1 kV up to 38 kV.¹ — **1 kV to 38 kV is the listed medium-voltage range; 38 kV is the ceiling¹**

B The flashcard deck

Twenty-six cards, one per term, in the order of chapter 1. Cover the right-hand side. The wording follows the rewritten chapter 1; the spaced-repetition widget in the study companion drills the same twenty-six terms from the data file, in their original wording.

Front — the term	Back — what it is, the number, and the sentence to say it in
SST — solid-state transformer Topology	A power-electronic converter that provides a transformer's two functions — changing the voltage, and galvanic isolation, meaning no direct electrical path between input and output — through medium-frequency magnetics, with controllable AC-DC and DC-DC stages on either side. ³² Number: 97–98.5% efficiency for MV-to-DC units; 99.0–99.5% for a good 60 Hz distribution transformer alone ¹⁸ <i>"It is a converter, not a transformer. That is why it can also rectify, regulate and ride through — and why it has the overload manners of a computer rather than of a block of iron."</i>
ISOP — input-series, output-parallel Topology	The connection pattern of an SST: cells stacked in series on the medium-voltage input, so each sees a fraction of the line voltage, and tied in parallel on the low-voltage output. ³¹ <i>"Series on the MV side so each cell sees a fraction of the line; parallel on the LV side so they make one stiff bus."</i>
CHB — cascaded H-bridge Topology	A multilevel converter built from single-phase full bridges (H-bridges) connected in series. It is the standard way to face medium voltage with low-voltage semiconductors: stack enough cells and each carries only its share of the line. ¹⁷ Number: 13.8 kV needs 14–15 cells per phase with 1.7 kV devices; 34.5 kV needs about 2.5× as many ³³ <i>"The cell count is the cost driver — each cell is a complete converter with its own capacitor, transformer, gate drivers and sensors."</i>
DAB — dual active bridge Topology	An isolated DC-DC converter with an active full bridge on each side of the transformer. Power flow is set by the phase shift between the two bridges' square waves, so it can run in either direction by construction. ³⁴ Number: 5–50 kHz switching ³⁵ <i>"Both bridges are active, so power can go back to the grid. A passive rectifier can never do that."</i>
CLLC / LLC Topology	Resonant isolated DC-DC topologies. A resonant tank circuit (the inductors and capacitors that give the names their Ls and Cs) lets the switches turn on and off at zero voltage or zero current, which cuts switching loss; CLLC is the bidirectional form. ³⁵ Number: NVIDIA specifies a 64:1 LLC with a matrix transformer to go from 800 V straight to 12 V inside the rack ¹² <i>"Resonant variants trade control range for soft switching and lower loss — and they tend to lose soft switching at light load."</i>
MMC — modular multilevel converter Topology	A multilevel converter built from half-bridge cells and used in HVDC (high-voltage DC) transmission; an alternative front end to the CHB at higher voltages. ³⁶ Number: N+1 redundancy (one spare cell beyond those needed) raises a modular multilevel drive's MTBF (mean time between failures) by about 1.7× — the one independent redundancy number available ¹ <i>"It is also where the SST's service model comes from: MV drives have been swapping cells in minutes for two decades."</i>
TRU / MV rectifier Topology	A conventional transformer stepping medium voltage down to low voltage, feeding a rectifier — diode, thyristor or active — to produce 800 V DC. ³⁷ Number: NVIDIA's named near-term path, mature from electrolysis, rail and mining. NVIDIA rates the MV rectifier and the SST identically, at 98.5% or better and as large as 7.5 MVA ² <i>"NVIDIA's own paper calls the TRU a faster, proven path and reserves the SST for the next generation. Do not sell against the TRU on efficiency — they are rated the same."</i>
MFT — medium-frequency transformer Magnetics	The kilohertz transformer inside each SST cell. It is small because the volt-seconds it must carry in each cycle fall as the frequency rises. It is demanding because it must hold medium-voltage insulation in that small volume while the fast-switched square waves of pulse-width modulation (PWM) stress it. ³⁸ Number: Raising f from 60 Hz to 10 kHz shrinks core area by roughly 170×; a 4 MW unit weighs about a fortieth of its 60 Hz equivalent — Infineon's comparison is 20 tonnes to about 500 kg ¹⁰ <i>"The magnetics are the part with the fewest suppliers: a low-loss nanocrystalline or ferrite core, MV insulation between windings, and a cooling path for the losses in a small volume."</i>
BIL — basic insulation level Magnetics	The lightning or switching impulse voltage a piece of equipment must withstand. It is set by the equipment class in the ANSI C84.1 standard, not by the vendor. ³⁹ Number: 15 kV class = 95 kV BIL; 25 kV class = 125 kV; 35 kV class = 150 kV ⁴ <i>"The class sets the insulation, the BIL and the cell count — which is why a 13.8 kV SST is a different product from a 34.5 kV one."</i>

Front — the term	Back — what it is, the number, and the sentence to say it in
PD — partial discharge Magnetics	Small, localised electrical breakdown inside insulation. It does not bridge the electrodes, but it erodes the insulation over time, and the very fast voltage swings (high dv/dt) of wide-bandgap devices such as SiC drive it. ²⁰ Number: A 35 kV interface needs roughly 100 kV of insulation — "three times", in TDK's assessment ²⁰ <i>"Oak Ridge's point is that IEEE C62.82.1 was written for iron: localised overstress can occur even when terminal-level clamping looks adequate, and impulse tests may not reflect internal stress."</i>
SiC — silicon carbide Devices	A wide-bandgap semiconductor: its wider energy gap lets a device block more voltage and switch faster than one made of silicon. SiC makes 1.2–3.3 kV MOSFETs (the transistor type used as the switch) practical at kilohertz switching, and it is the enabling device of the SST. ⁴⁰ Number: Production classes 1.2, 1.7 and (from few suppliers) 3.3 kV; 6.5 and 10 kV exist as samples. SiC fell from over \$10/A (dollars per ampere of rating) in 2018 to \$2–3/A in 2025 ⁴⁰ <i>"Moving from 1.7 kV to 3.3 kV devices roughly halves the cell count. That is why Amperesand builds on 3.3 kV parts, and why Wolfspeed's wafer capacity is a supply question for the whole layer."</i>
Cosmic-ray derating Devices	Atmospheric neutrons, produced by cosmic rays, can cause single-event burnout in power devices held at a high electric field, so each cell's DC-link voltage is set well below the device's rating. ⁴¹ Number: The customary derating is about 0.55 × device rating — the factor behind every cell-count figure in this brief ¹ <i>"Burnout can occur at 50% or less of rated breakdown, so the derating is not conservatism. It is the design rule."</i>
Fail-short Devices	The property a die (a single semiconductor chip) in a series stack needs: when it fails it must keep conducting, so the stack stays up until the cell can be bypassed. ⁴² Number: Oak Ridge National Laboratory (ORNL) calls SiC fail-short in series stacks "an open research challenge" ⁴² <i>"Press-pack silicon fails short and keeps conducting for months. SiC's thermal stability, small die area and short short-circuit withstand make that hard — and it is the reliability question a careful buyer will actually ask."</i>
SSCB — solid-state circuit breaker Protection	A semiconductor switch that interrupts DC fault current in microseconds. It is needed because DC has no natural current zero, the moment in every AC cycle that a mechanical contact exploits to put out its arc. ¹⁹ Number: NVIDIA targets 125 A air-cooled and 1250 A liquid-cooled solid-state breakers, with moulded-case circuit breakers (MCCBs) as the Day-1 branch device ⁴³ <i>"Siemens measured it: at a 200 A/us rise rate, capacitor-discharge interruption was only possible with solid-state breakers. Fuses peaked near 9.4 kA at about 3 ms."</i>
HRMG / HRRG Protection	High-resistance midpoint grounding and high-resistance return grounding: two of the four schemes under evaluation for connecting a two-wire 800 V DC bus to earth, alongside floating (no ground connection) and solid grounding. ⁴⁴ Number: Four candidates; the paper leans towards HRMG ⁴⁴ <i>"HRMG grounds both conductors symmetrically through a midpoint resistor network. The conductor-to-ground voltages stay balanced, fault detection works the same on both conductors, and it keeps operating after the first fault."</i>
IMD / RCM Protection	Insulation monitoring device and residual current monitor, two ways of detecting current leaking to ground. The facility zone uses IMD/IRM, which raises an alarm without shutting down; the rack interface zone prefers RCM for fast leakage detection. ⁴⁵ Number: Two protection zones ⁴⁵ <i>"The 125 A whip stays de-energised during install and removal — the mechanical lock must engage before an enable signal closes the contactor. That is EV-charging lineage, and they will expect you to know it."</i>
AFE — active front end Control	A rectifier built from controlled switches rather than diodes. It draws sinusoidal current at unity power factor (current in step with voltage), can supply reactive power, and can be programmed to follow a ride-through curve. ⁴⁶ Number: IEEE 519 limits total voltage distortion to 5% at the point of common coupling, with no individual harmonic above 3% ²³ <i>"This is the SST's real US argument: the converter is the model. A transformer cannot be programmed to a ride-through curve; an active front end is the curve."</i>
Grid-forming Control	A converter that sets the voltage and frequency rather than following them; this includes black start, restarting a network that has gone dead. ⁵ Number: Heron claims IEEE 2800 and ERCOT NOGRR 282 compliance with under 1% ripple injected at MV ⁵ <i>"Grid-forming is what turns a gigawatt load into a grid citizen rather than a grid problem."</i>
Ride-through Control	A load's ability to stay connected through a voltage or frequency disturbance instead of tripping. ²³ Number: NOGRR 282: 2 s at 0.85 pu, 150 ms below 0.35 pu, no more than 150% current, 90% recovery within 2 s, six sags in 90 s ¹ <i>"The root cause in Virginia in July 2024 was not the transformer. It was a disturbance-counting scheme and manual retransfer. An SST does not override downstream customer logic, and the cooling plant is usually not behind the critical bus."</i>

Front — the term	Back — what it is, the number, and the sentence to say it in
Service-voltage class Grid interface	The equipment class, under the ANSI C84.1 standard, of the utility feed a site takes. It sets insulation, BIL and cell count — and therefore the product.⁴⁷ Number: 12.47/13.2/13.8 kV = 15 kV class; 24.9 kV = 25 kV class; 34.5 kV = 35 kV class; gigawatt campuses tie in at 69-345 kV⁴ <i>“Large greenfield campuses in Texas and the Southeast trend to 34.5 kV because it moves more power on fewer, smaller feeders. Northern Virginia runs 34.5 kV distribution behind 230 kV ties.”</i>
PCC — point of common coupling Grid interface	Where the customer’s installation meets the utility’s system, and where IEEE 519 harmonic limits are assessed.⁴⁸ Number: Limits tighten at higher voltage and at a lower short-circuit ratio, that is, on a weaker grid⁴⁸ <i>“For an SST-fed hall the PCC is usually the utility’s MV side — so your harmonic signature is measured at 34.5 kV, not at the rack.”</i>
The 4.8 MW block Grid interface	NVIDIA’s standardised DC power block for a data hall: medium voltage in, a 6000 A-class DC switchboard, parallel 1250 A busways (enclosed bars that carry power along the row) and 4+1 catcher redundancy through a DC static transfer switch.²⁴ Number: 4.8 MW per block, 20 MW deployment units of four scalable units²⁴ <i>“Every vendor now has to answer how it composes into 4.8 MW blocks and 1250 A busways with the tap-can interface. Paralleling, busway compatibility and catcher participation are the three concrete questions.”</i>
UL 1741 / 347A / 2877 Standards	The US listing routes: the product-safety certifications a US inspector looks for. UL 1741, with supplements SA and SB, is the dominant path for inverters and converters; UL 347A and UL 2877 cover medium-voltage power conversion from 1 kV up to 38 kV.¹ Number: 1 kV to 38 kV is the listed medium-voltage range; 38 kV is the ceiling¹ <i>“Know your listing status precisely. The most quotable line from PCIM Europe 2026 is that there is no UL certification for the 800 VDC bus, and that this is a major gap.”</i>
IEC 62477-2 Standards	The international safety envelope for MV converters: 1 kV AC / 1.5 kV DC up to 36 kV AC / 54 kV DC. Edition 2 went to CDV (committee draft for vote), with voting closing 13 March 2026.¹ Number: 36 kV AC ceiling¹ <i>“The envelope exists internationally. What does not exist anywhere is a listed data-centre SST.”</i>
DC arc flash Standards	The explosive release of energy when an arc strikes on a DC system. NFPA 70E 2027, the US workplace electrical-safety standard, names the hazard, and no standard can yet calculate it: IEEE 1584-2018, the arc-flash calculation method, covers AC only.⁴⁹ Number: 70E 2027 adds Article 310 with DC thresholds; the NFPA research project aims its model at 70E 2030 — a three-year gap¹ <i>“Operators will energise 800 V DC busway for years with no validated way to compute incident energy. The interim answer is conservative table-based PPE, de-energised-work rules and negotiation with the local inspector, the AHJ, project by project.”</i>
OCP LVDC SST Specification v0.3 OCP SST Specification, Rev. 0.3.0 Standards	The buyers’ black-box specification for a megawatt-class converter from MV AC to 800 V DC, by Google, Microsoft and NVIDIA, effective 22 June 2026.⁸⁸ Number: SKU A 13.8 kV / 5 MW; SKU B 34.5 kV / 5 or 10 MW; at least 98% from 50–100% load⁸⁵ <i>“Your own specification has a 34.5 kV SKU at 5 and 10 MW. Tell me which SKU this site needs, and I will tell you exactly where we stand against it.”</i>

C Sources by tier

C.0 Numbered references

One row for every superscript number in the text, numbered in order of first appearance; the colour of the number is its tier. All the web research of 23 September shares a single number, because the drafting did not record which sentence used which URL, and a guessed mapping would be worse than a shared number. Numbers 85–89 were appended on 24 September for the OCP specification and its announcement, so they break the order-of-first-appearance rule rather than renumber the whole document. The URLs themselves are listed under the web tier below. Inline analysis carries a gold A and has no number.

#	Tier	Source
1	Web	Web research of 23 September 2026 — see the URL list below
2	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 21–23, as recorded in the guidance claims ledger
3	Dossier	Sungrow — Profiler dossier sungrow, version 9
4	Primer	SST primer, 12 September 2026 — chapter 6.1
5	Dossier	Heron Power — Profiler dossier heron-power, version 1
6	Dossier	DG Matrix — Profiler dossier dg-matrix, version 1
7	Dossier	ABB — Profiler dossier abb, version 7
8	Dossier	Megmeet — Profiler dossier megmeet, version 7
9	Primer	SST primer, 12 September 2026 — chapter 3
10	Primer	SST primer, 12 September 2026 — chapters 3.1 and 5.5
11	Primer	SST primer, 12 September 2026 — chapter 5.1
12	Primer	SST primer, 12 September 2026 — chapter 2.2
13	Primer	SST primer, 12 September 2026 — chapter 2.2, figure 2
14	Primer	SST primer, 12 September 2026 — chapter 2.1, figure 1
15	Primer	SST primer, 12 September 2026 — chapter 3.1
16	Primer	SST primer, 12 September 2026 — chapters 1 and 5.5
17	Primer	SST primer, 12 September 2026 — chapter 3.2, figure 5
18	Primer	SST primer, 12 September 2026 — chapter 3.5
19	Primer	SST primer, 12 September 2026 — chapter 5.2
20	Primer	SST primer, 12 September 2026 — chapter 5.3
21	Primer	SST primer, 12 September 2026 — chapter 5.6
22	Primer	SST primer, 12 September 2026 — chapter 6.2
23	Primer	SST primer, 12 September 2026 — chapter 6.3
24	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 17–21, as recorded in the guidance claims ledger
25	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), page 7, as recorded in the guidance claims ledger
26	Primer	SST primer, 12 September 2026 — chapter 8.2
27	Primer	SST primer, 12 September 2026 — chapter 7.3
28	Dossier	Novos Power — Profiler dossier novos-power, version 1
29	Primer	SST primer, 12 September 2026 — chapter 6.3, figure 12
30	Primer	SST primer, 12 September 2026 — chapter 7.4

#	Tier	Source
31	Primer	SST primer, 12 September 2026 — chapter 3.1, figure 4
32	Primer	SST primer, 12 September 2026 — chapters 3 and 9
33	Primer	SST primer, 12 September 2026 — chapters 3.2 and 6.1
34	Primer	SST primer, 12 September 2026 — chapter 3.3, figure 6
35	Primer	SST primer, 12 September 2026 — chapter 3.3
36	Primer	SST primer, 12 September 2026 — chapter 9
37	Primer	SST primer, 12 September 2026 — chapter 4.1
38	Primer	SST primer, 12 September 2026 — chapters 3.1, 3.3 and 5.5
39	Primer	SST primer, 12 September 2026 — chapters 6.1 and 9
40	Primer	SST primer, 12 September 2026 — chapters 3.2 and 6.6
41	Primer	SST primer, 12 September 2026 — figure 5
42	Primer	SST primer, 12 September 2026 — chapter 5.4
43	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 27–30, as recorded in the guidance claims ledger
44	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 24–26, as recorded in the guidance claims ledger
45	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 26–27, as recorded in the guidance claims ledger
46	Primer	SST primer, 12 September 2026 — chapters 5.5 and 6.3
47	Primer	SST primer, 12 September 2026 — chapter 6.1, figure 11
48	Primer	SST primer, 12 September 2026 — chapter 6.5
49	Primer	SST primer, 12 September 2026 — chapter 6.4
50	Primer	SST primer, 12 September 2026 — chapters 3.5, 5.1 and 6.2
51	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 21–22, as recorded in the guidance claims ledger
52	Primer	SST primer, 12 September 2026 — chapters 3.5, 5.1, 5.5 and 5.6
53	Primer	SST primer, 12 September 2026 — chapter 5.5
54	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), page 22, as recorded in the guidance claims ledger
55	Dossier	Vertiv — Profiler dossier vertiv, version 9
56	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), page 8, as recorded in the guidance claims ledger
57	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), page 9, as recorded in the guidance claims ledger
58	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 10–14, as recorded in the guidance claims ledger
59	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 14–17, as recorded in the guidance claims ledger
60	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 22–23, as recorded in the guidance claims ledger
61	Primer	SST primer, 12 September 2026 — chapter 4.3, figure 8
62	Primer	SST primer, 12 September 2026 — chapter 4.3
63	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), page 24, as recorded in the guidance claims ledger
64	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 27–29, as recorded in the guidance claims ledger
65	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 29–30, as recorded in the guidance claims ledger
66	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 4 and 12, as recorded in the guidance claims ledger

#	Tier	Source
67	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 30–33, as recorded in the guidance claims ledger
68	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 4, 22, 34 and 35, as recorded in the guidance claims ledger
69	Report	Profiler competitive report <i>AIDC Power Conversion — The 800 VDC Race</i> , 8 September 2026 (aidc-power-conversion--competitive--2026-09-08)
70	Primer	SST primer, 12 September 2026 — chapter 6.6
71	Dossier	Zhonhen — Profiler dossier zhonhen, version 8
72	Dossier	Amperesand — Profiler dossier amperesand, version 2
73	Dossier	GE Vernova — Profiler dossier ge-vernova, version 6
74	Dossier	Hitachi Energy — Profiler dossier hitachi-energy, version 5
75	Dossier	Schneider Electric — Profiler dossier schneider-electric, version 9
76	Dossier	Sinexcel — Profiler dossier sinexcel, version 8
77	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 14–21, as recorded in the guidance claims ledger
78	Dossier	Megmeet — Profiler dossier megmeet, version 8
79	Dossier	Huawei Digital Power — Profiler dossier huawei-digital-power, version 8
80	Guidance	NVIDIA, <i>800 VDC Architecture: Industry Alignment & Execution</i> (August 2026), pages 10–23, as recorded in the guidance claims ledger
81	Dossier	LITEON — Profiler dossier liteon, version 7
82	Dossier	LITEON — Profiler dossier liteon, version 6
83	Primer	SST primer, 12 September 2026 — chapters 1 and 4.3
84	Primer	SST primer, 12 September 2026 — chapter 1
85	Spec	OCP, <i>Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform</i> , Revision 0.3.0, effective 22 June 2026 — §3 Scope and §4 Base product specifications, pp. 7–10
86	Spec	OCP, <i>Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform</i> , Revision 0.3.0, effective 22 June 2026 — §5 Electrical, including Figure 3 (voltage ride-through), pp. 10–15
87	Spec	OCP, <i>Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform</i> , Revision 0.3.0, effective 22 June 2026 — §6 Environmental and structural, §7 System behaviour, §8 Compliance and Appendix A, pp. 15–24
88	Spec	OCP, <i>Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform</i> , Revision 0.3.0, effective 22 June 2026 — cover, version history and §1 licence, pp. 1–5
89	Spec	OCP blog, <i>Powering the Next Era of AI: How Google, Microsoft and NVIDIA Are Standardizing and Accelerating the Industry Transition to LVDC</i> , 11 August 2026, by Jason Adrian (Google), Microsoft and Mike Tu (NVIDIA) — six-page browser print of opencompute.org taken 24 September 2026

Corpus tiers

- **PRIMER** — *Solid-State Transformers for AI Data Centers — Educational Primer*, 12 September 2026. Source repository-information/sst-primer-print.html, PDF SOLID-STATE-TRANSFORMERS-PRIMER.pdf, figures sst-primer-figures/. Ten chapters and fourteen figures, each carrying its own numbered first-party sources.
- **GUIDANCE nvidia-800vdc** — the page-referenced claims ledger and guardrail list for NVIDIA's *800 VDC Architecture: Industry Alignment & Execution* (August 2026, 36 pp.), at repository-information/industry-guidance/nvidia-800vdc-analysis.md. Page numbers in this document refer to that paper.
- **REPORT 2026-09-08** — Profiler competitive report *AIDC Power Conversion — The 800 VDC Race*, fifteen dossiers across four layers, at live-site-pages/profiler-data/reports/aidc-power-conversion--competitive--2026-09-08.report.json. A companion report scoped to this document's subject was

generated alongside it: `sst-hall-edge-block--competitive--2026-09-23.report.json`, eighteen dossiers and forty-six citations.

- **DOSSIER** — Profiler company dossiers at `live-site-pages/profiler-data/<slug>.profile.json`, each cited at the version given in its C.0 row. **Cited in this document:** `abb v7 · amperesand v2 · dg-matrix v1 · ge-vernova v6 · heron-power v1 · hitachi-energy v5 · huawei-digital-power v8 · infineon v1 · liteon v6 · liteon v7 · megmeet v7 · megmeet v8 · novos-power v1 · schneider-electric v9 · sinexcel v8 · sungrow v9 · vertiv v9 · vicor v2 · zhonhen v8`. **Read for the companion competitive report but not cited here** — the claims they support are carried in this document at the web tier instead, because the web source is the one that was checked on 23 September: `delta-electronics v5 · eaton v8 · oracle v5 · siemens-energy v7`.
- **SPEC** — OCP, *Solid State Transformer (SST) Specification — Medium Voltage to 800 VDC Power Conversion Platform*, Revision 0.3.0, effective 22 June 2026, 24 pp., authored by Google, Microsoft and NVIDIA; and OCP's blog post of 11 August 2026 that announced it (reference 89). Both were supplied by the reader on 24 September 2026, read in full, and are not stored in the repository.

WEB — research performed for this document, all verified 2026-09-23 (47 sources)

1. **alderbuck.com** — <https://alderbuck.com/alderbuck-energy-to-deploy-800-vdc-solid-state-transformer-platform-at-san-diego-supercomputer-center/>
2. **azure.microsoft.com** — <https://azure.microsoft.com/en-us/blog/accelerating-open-source-infrastructure-development-for-frontier-ai-at-scale/>
3. **blogs.nvidia.com** — <https://blogs.nvidia.com/blog/800-vdc-power-architecture-ai-factory/>
4. **blogs.nvidia.com** — <https://blogs.nvidia.com/blog/dsx-ready-ai-factories-power-cooling/>
5. **blogs.nvidia.com** — <https://blogs.nvidia.com/blog/gigawatt-ai-factories-ocp-vera-rubin/>
6. **blogs.oracle.com** — <https://blogs.oracle.com/cloud-infrastructure/first-principles-data-center-innovations>
7. **developer.nvidia.com** — <https://developer.nvidia.com/blog/building-the-800-vdc-ecosystem-for-efficient-scalable-ai-factories/>
8. **developer.nvidia.com** — <https://developer.nvidia.com/blog/nvidia-800-v-hvdc-architecture-will-power-the-next-generation-of-ai-factories/>
9. **developer.nvidia.com** — <https://developer.nvidia.com/blog/nvidia-vera-rubin-pod-seven-chips-five-rack-scale-systems-one-ai-supercomputer/>
10. **en.cnesa.org** — <https://en.cnesa.org/latest-news/2025/11/25/nvidias-800v-architecture-reshapes-ai-data-centers-31-core-industry-chain-companies-unveiled>
11. **enphase.com** — <https://enphase.com/iq-solid-state-transformer>
12. **epoch.ai** — <https://epoch.ai/data/ai-data-centers/directory/openai-stargate-abilene>
13. **finance.sina.cn** — <https://finance.sina.cn/2026-04-29/detail-inhweskv0849280.d.html>
14. **finance.sina.com.cn** — <https://finance.sina.com.cn/roll/2025-02-19/doc-inekyll4968102.shtml>
15. **gridtechpedia.inl.gov** — <https://gridtechpedia.inl.gov/technology/solid-state-devices-ssds-and-the-power-grid/>
16. **interestingengineering.com** — <https://interestingengineering.com/energy/worlds-first-22-9kv-solid-state-transformer>
17. **mgrid.org** — <https://mgrid.org/2025/08/15/eaton-closes-acquisition-of-resilient-power-systems-to-bring-medium-voltage-solid-state-transformers-in-house/>
18. **nepp.nasa.gov** — <https://nepp.nasa.gov/files/29832/NEPP-CP-2018-Lauenstein-Galloway-Paper-HEART-TN65899-NEPPweb-reuse-TN54861.pdf>

19. **news.ncsu.edu** — <https://news.ncsu.edu/2026/08/solid-state-transformer-success/>
20. **news.qq.com** — <https://news.qq.com/rain/a/20260828A04BC400>
21. **press.siemens.com** — <https://press.siemens.com/global/en/pressrelease/siemens-and-partners-develop-reference-architecture-purpose-built-nvidia-ai-data>
22. **press.siemens.com** — <https://press.siemens.com/global/en/pressrelease/siemens-and-reinhausen-develop-direct-current-power-solutions-ai-data>
23. **pro-etic.com** — <https://pro-etic.com/which-medium-voltage-drive-topology-could-meet-my-reliability-availability-requirements/>
24. **pvmagazine-usa.com** — <https://pvmagazine-usa.com/2026/08/21/fcc-updates-foreign-inverter-ban-to-include-wireless-devices-adds-45x-safe-harbor/>
25. **rmsenergy.com** — <https://rmsenergy.com/tdec-post/after-3-8-gw-dropped-in-virginia-nercs-computational-load-standards-move-from-draft-to-deadline/>
26. **static.cninfo.com.cn** — <https://static.cninfo.com.cn/finalpage/2026-08-28/1225522762.PDF>
27. **stock.qianzhan.com** — https://stock.qianzhan.com/hs/zhuyingchanpin_002851.SZ.html
28. **tradecareerpath.com** — <https://tradecareerpath.com/blog/electricians-ai-data-centers/>
29. **abb.com** — <https://www.abb.com/global/en/areas/electrification/campaigns/infinitus-dc-portfolio>
30. **ams-publications.ee.ethz.ch** — https://www.ams-publications.ee.ethz.ch/uploads/tx_ethpublications/INTELEC_2025_-_2_30PM_Kolar_99___Efficient_SSTs_for_Future_Datacenters_Keynote_231025.pdf
31. **datacenterknowledge.com** — <https://www.datacenterknowledge.com/energy-power-supply/solid-state-transformers-power-next-gen-ai-data-centers>
32. **ecmweb.com** — <https://www.ecmweb.com/safety/arc-flash/news/55356294/fire-protection-research-foundation-seeks-sponsors-for-dc-arc-flash-hazard-study>
33. **gevernova.com** — <https://www.gevernova.com/power-conversion/product-solutions/medium-voltage-drives/mm7>
34. **hklaw.com** — <https://www.hklaw.com/en/insights/publications/2026/09/executive-order-declares-national-emergency-to-secure-us>
35. **intertek.com** — <https://www.intertek.com/blog/2026/06-01-solid-state-transformers-evaluation-and-certification/>
36. **megmeet-welding.com** — <https://www.megmeet-welding.com/en/about>
37. **morganlewis.com** — <https://www.morganlewis.com/pubs/2026/08/fcc-adds-foreign-produced-advanced-robotic-devices-and-power-inverters-to-covered-list-opens-conditional-approval-process>
38. **oracle.com** — <https://www.oracle.com/data-centers/>
39. **oracle.com** — <https://www.oracle.com/news/announcement/blog/oracle-ai-infrastructure-in-2026-and-our-commitment-to-local-communities-2026-01-26/>
40. **oracle.com** — <https://www.oracle.com/news/announcement/oracle-borderplex-and-bloom-energy-to-power-project-jupiter-with-fuel-cell-technology-2026-04-27/>
41. **osti.gov** — <https://www.osti.gov/biblio/1892478>
42. **powerelectronicsnews.com** — <https://www.powerelectronicsnews.com/real-world-solid-state-transformers-overcome-barriers-to-meet-adoption-needs-of-ac-and-dc-networks/>
43. **powerelectronicsnews.com** — <https://www.powerelectronicsnews.com/the-evolution-in-data-center-power-distribution-panel-part-2-ssts/>
44. **powerelectronicsnews.com** — <https://www.powerelectronicsnews.com/the-evolution-in-data-center-power-distribution-pcim-panel-part-1-the-transition-to-800-v/>

45. **pvmagazine.com** — <https://www.pv-magazine.com/2026/04/23/eu-moves-to-restrict-funding-for-projects-using-inverters-from-high-risk-suppliers/>
46. **standards.iteh.ai** — <https://www.standards.iteh.ai/catalog/standards/clc/787271b2-55a0-44a2-b650-c6a67ef7bdd6/pren-iec-62477-2-2025>
47. **wolfsped.com** — <https://www.wolfsped.com/knowledge-center/article/amperesand-case-study/>

D Colophon

This document was produced by an unattended overnight run on 23 September 2026, working from a plan written the previous session. Nobody was in the room. That is the reason for this appendix: every judgement made in the developer's absence is recorded here, so that a reader can see where the run chose rather than found.

D.1 Pre-flight, as run

Check	Result on 2026-09-23
Repository identity and branch state	LightAISolutions/Sales, clean tree at origin/main, working branch claude/fervent-lovelace-sk1c5s, no stale remote branch.
Clone depth	Deepened with <code>git fetch --unshallow origin main</code> before any date or SHA lookup — 1,602 commits.
Toolchain	Node 22 and Chromium at /opt/pw-browsers present. matplotlib and playwright installed with <code>pip install</code> ; <code>playwright install</code> was never run, per the environment's rule.
Dossier freshness	Not re-run. The plan's \$0 pre-flight of the same morning recorded <code>dueCount: 0</code> across 85 cadence rows, and the run date is inside that window.
Newer AIDC report?	<code>aidc-power-conversion--competitive--2026-09-08</code> was still current in the index. The monthly drift check does not fire until 1 October.
CHANGELOG capacity	Read live: Sections: 99/100 before the first push. Archive rotation was evaluated and is not due — see D.2, assumption 1.

D.2 Every assumption made in the developer's absence

- Archive rotation was not performed, and the plan said it would be.** The plan stated that rotation falls due on the push that takes the CHANGELOG counter to 100. The rotation procedure itself tests the *non-exempt* count, with the current day exempt: at the first push the raw count reached 100 but eight of those sections carried 23 September, leaving **92 non-exempt against a trigger of 100**. That is Scenario A in the rotation examples — a total at or above 100 does not by itself rotate. The run followed the procedure rather than the plan's summary of it, and deepened the clone anyway so that a rotation on any later push would resolve its SHAs.
- The Profiler report was scoped to eighteen slugs, as the plan specified, and no more.** `vicor`, `flex`, `huawei-digital-power`, `oracle` and `nvidia` are covered but were left out of scope, with the reason recorded in the report's own scope rationale and gaps block.
- The report builds on the 8 September edition and does not supersede it.** No `supersedes` field was set and no existing index entry was flipped to `superseded`, because the two reports answer different questions on different cuts.
- The reader's hearsay about NVIDIA and Oracle engineering contact steered chapter 8's depth and nothing else.** It is stated once, in a box, on the contents page beside the source legend, labelled `unverified`. No sentence anywhere in this document is sourced to it, and chapter 8 is built entirely from published material.
- Where the plan and a repository rule disagreed, the rule won.** That happened once, on rotation (assumption 1). Everywhere else the plan and the rules agreed.
- The five Phase-B research subagents ran on the same model as the main thread**, as the plan recommended, rather than on the cheaper option the plan offered as a cost lever. The run was already inside its time budget and the pilot ledger depended on reading filings carefully.
- Two figures were redesigned away from the form the plan implied.** The plan's minimum figure set names "NVIDIA + Oracle programme timelines side by side" and a "first-90-days calendar". Both were first drawn on a shared horizontal time axis, rendered, inspected, and found illegible — NVIDIA's milestones cluster inside eleven months and overprint at page width. Both were rebuilt as dated lists, and the reason is recorded in the figure script's own docstrings.
- The competitor positioning map became a grid rather than a scatter** for the same reason: seven of the seventeen vendors sit in just two cells, and no amount of marker jitter separates them. The grid carries the same two axes and loses nothing.

9. **“Undisclosed” is used as a finding, not as a hedge.** Where a vendor has published nothing, the cell says so and the row stays in the table. This applies to Megmeet exactly as it applies to Amperesand, GE Vernova, Hitachi Energy, Vertiv, Schneider and Sinexcel.
10. **Two pieces of third-party information were deliberately not carried.** A report indexed as giving Megmeet a 10 kV domestic and 35 kV international SST split was left out of every table because the page could not be read and the figures are exactly the inference this document forbids. Dossier v8 has since read the page — ifeng, 1 July 2026 — and found that it attributes the split to the 20 May earnings call, whose exchange-filed record calls the SST pre-research and contains no kV figure.⁷⁸ The split stays out of every table, now for a better reason: the filed record does not support it. And two consultancies giving the same appliance-controls competitor 13% and 77% of the same market were both excluded rather than one being chosen.
11. **The efficiency figures in the conversion-chain widget are indicative and are labelled so.** The published chain losses are not like-for-like — each author uses a different boundary and load point — and the data file says this in the boundary field that the widget displays.
12. **The older Megmeet prep documents were not edited.** The interview brief, the lesson plan and the study guide are dated documents; chapter 9.4 lists what the current record contradicts in them and changes nothing.
13. **A tier tag is written once per sentence, and the scripted columns are labelled analysis.** Where a source URL had been carried inside a tag it was moved to Appendix C, so every tag in the document and every tag in the data file is one of the five fixed forms or ANALYSIS. Two columns are scripted language rather than record — *the sentence to say it in* in chapter 1 and *the one sentence* in chapter 10 — and each chapter says so rather than carrying a tag per cell. The convention for the wide reference tables is stated on the citation-contract page. *Since the rewrite of 23 September the tags appear as numbered superscripts and the citation-contract page is the source legend; see the rewrite note at the end of this appendix.*

D.3 How this was built

Artefact	Built by
The data file	repository-information/study-prep/megmeet/megmeet-sst-briefing-data.json — the single source for every number in a figure or a widget, 215 values each carrying one of six tier tags. Written before the figures and before the companion.
The fourteen figures	python3 scripts/build-megmeet-sst-briefing-figures.py — a copy of the primer's figure script with the paths changed, the mmsst-fig- prefix applied, and one structural difference: it reads the data file rather than carrying numbers inline. Palette re-validated against the dataviz skill's six checks on the white print surface — all six PASS — and not re-tinted.
The primer's figures	Referenced by number in the text, never copied. The primer remains the source of its own fourteen.
This PDF	node scripts/build-megmeet-sst-briefing-pdf.mjs — a copy of the primer's PDF script with the paths and the DevTools port changed. Rendered through the pre-installed Chromium over the DevTools Protocol so the running header and page numbers survive. The - - png proof pages were rendered and read, page by page, before the PDF was called finished. They are 49 slices of the whole document at a 740 px body width with page breaks disabled — the entire content, at a different pagination from the 69 printed pages of that first build, which is what the mode is for. The PDF was 71 pages after the run's audit pass, 72 after the v8 amendment and 76 after the rewrite, and 84 after the OCP specification pass of 24 September.
The study companion	megmeet-sst-briefing-companion.html — one self-contained file with the same data file inlined byte-identically, no CDN, works offline. Tested with Playwright from file://.
The Profiler report	live-site-pages/profiler-data/reports/sst-hall-edge-block--competitive--2026-09-23.report.json, dossiers-only, forty-six citations copied verbatim from the cited dossiers' own source lists, python3 scripts/check-profiler-reports.py clean.

The audit pass. A fresh subagent, given no part of the drafting context, audited the finished PDF against the plan's twelve-line rubric and returned thirty-five findings. All of them were worked. The five that mattered: the claim that power products carried “the only expanding gross margin in the company” was false on this document's own data — three of the six segments expanded, and pages in Part IV said so — and is now stated as the only expansion *among the three largest segments*; three figures asserted per-row sourcing they did not print, and now print it; Part V's scope note promised a tag on every fact inside an answer, which two chapters did not do, and the note now describes the convention actually used; the cell-count multiplier appeared as 2.5×, 2.3× and 2.7× on one page without saying which was which; and four dossier versions listed in Appendix C were never cited, and are now separated from the seventeen that are. The full findings list is in the session record, not in this document.

Amendment, evening of 23 September 2026. After dossier v8 landed, chapter 9.4 gained a second correction table — the six places where v8 contradicts this briefing, plus the bounding of the 10 kV / 35 kV lead — and the companion report was superseded by sst-hall-edge-block-rev2--competitive--2026-09-23. Nothing else in the document changed, and the build statistics below describe the original run.

Effort: one unattended session at maximum reasoning effort, with five bounded web-research subagents. **Run:** started 07:36 EST on 23 September 2026, PDF finished 09:24 EST and rebuilt after the audit pass at 10:25 EST — 2 h 49 min in total. **This build:** seventy-one pages at the end of the run (72 after the v8 amendment), fourteen new figures, 215 tagged records in the data file, forty-seven web sources, forty-six report citations.

Rewrite, evening of 23 September 2026. After the v8 amendment, the whole document was rewritten for clarity and learning, and its citations were renumbered, with no new research. **What changed in the text:** each term is defined where it first appears; long sentences were split and repeated caveats cut; a few explanations gained the step they skipped, among them the stage-by-stage walk through one SST in chapter 1, the arithmetic behind three of the numbers in I.2, and a worked cell count in chapter 6.2; and the glossary and flashcards now follow the rewritten chapter 1. The body was also corrected at the places chapter 9.4 lists, and at the further places that repeat the same findings (the lead discussed in chapter 9.1 and chapter 13, the US-plant question in chapter 16.2, and the manufacturing footprint in chapter 10's Heron row), each citing dossier v8. **What changed in the citations:** the bracketed tier tags became superscript numbers, one per distinct source string, numbered in order of first appearance and resolved in Appendix C.0. Each number keeps its tier's colour, all the web research shares one number, and a sentence of inline analysis carries a gold A. **What did not change:** the rule of one source per sentence, the five tiers and their colours, the analysis boxes, the parts, chapters, figures and table columns, and every fact, number, date and name outside the v8 corrections; the one change of attribution is that the 60.92% growth is now given to the power-products segment, as I.1 and I.2 already had it, rather than to the chain. The figures, the data file and the study companion keep the original tag strings; the two figure captions that carried a tag now carry its number. The fresh audit returned fifteen findings, and all were worked: the rewrite had moved a web citation onto a dossier in chapter 13, linked records the dossier keeps separate in chapters 9.3 and 16.2, dropped the Goldman Sachs and Sina attribution in week-one question 6, and stated a firmer verdict on the LITEON story than the record supports; each is corrected. A checker compared the rewritten text with the original after every chapter — number tokens, the mapping from tags to numbers, the C.0 coverage and uncited sentences — and a fresh subagent, given no part of the drafting context, then audited the rewrite chapter by chapter against the original. **Effort:** one session, with the checker and the one audit subagent. **Run:** started 20:16 EST on 23 September 2026. **This build:** 76 pages and 84 numbered references.

Follow-up, evening of 23 September 2026. Six things the rewrite had flagged as looking wrong were checked against primary material and corrected. (1) Chapter 7 named one owned unsolved obstacle where its own table has two, FERC and the NFPA research foundation. (2) Chapter 16.2 listed the NC State / NYPA / EPRI feeder voltage as unstated in any coverage. Both NC State releases of 18 August give only “up to 1 MW”, but POWER Magazine's account of 8 September, which the primer cites, states a 13.2 kV feeder, so the item was removed. (3) Chapter 16.4 said chapter 7's newsletter-sourced claims were marked low confidence at each use. Git history shows no such marking in any version, and NEC Article 706 appears nowhere else, so the box now says what can and cannot be marked. (4) Figure M1 called Novos Power the fifth SST name and chapter I.3 the sixth. The primer's chapter 7.3 names eight SST developers, so the ordinal was dropped in both, and the figure's roster note in the data file was completed. (5) The colophon's page counts (69 and seventy-one) are right for the moments they describe, and git history confirms it; each now says which moment. (6) The data file's footprint answer, shown in the companion, now matches dossier v8. Only the data file, the companion (which inlines it byte-identically) and Figure M1 changed; the other thirteen figures regenerate identically and were left as they were.

OCP specification pass, 24 September 2026. The reader supplied the OCP SST Specification, Revision 0.3.0, and OCP's announcement of 11 August 2026 — the two documents opencompute.org had refused to this environment. Both were read in full, and the briefing was updated wherever it described the specification second-hand or left open a question the specification answers. Every change is highlighted in place, text a correction replaces is struck through beside it, and Appendix E lists every change. The data file, figures M2 and M11 and the companion were brought into line. References 85–89 were appended rather than renumbering the document. The PDF went from 76 to 84 pages.

E What changed on 24 September — the OCP specification pass

NEW APPENDIX · 24 SEPTEMBER 2026

On 24 September 2026 the reader supplied the two documents this briefing could not reach: the OCP *Solid State Transformer (SST) Specification*, Revision 0.3.0, and OCP's announcement of 11 August 2026. Both were read in full, including the figures, and every place where the briefing described the specification second-hand, or where the specification answers a question the briefing left open, was updated. Every change is highlighted in the text; this table is the index to them. **Corrected** means the first edition said something the specification shows was wrong or outdated, and the old text is struck through beside the new. **Added** means new material with nothing withdrawn. **Confirmed** means a second-hand claim now has a first-hand source.

Where	What changed	Kind
Cover	An "Updated" line; two sentences in the bottom line — the 98% floor on a stated boundary, and the 34.5 kV SKU the buyers now require.	Added
Contents · source legend	Chapter 3.5 and this appendix listed; a new Spec tier for references 85–89; the highlight convention.	Added
I.1, point 3	The specification's recommended overload settings, 120% for 5 s and 150% for 150 ms.	Added
I.2	Four new numbers — the two SKUs, the 98% floor, the overload setting and the basic insulation level — taking the table from twenty-three to twenty-seven; the NOGRR 282 row now points to 16.3.	Added
I.4 box	The specification is in hand. Its title, authors and dates are now first-hand — effective 22 June 2026, announced 11 August 2026 — in place of the second-hand "July 2026"; and the "80 manufacturers building to it" are corrected to 80 partners developing 800 V DC-compatible infrastructure, which is not the same as building to this specification.	Corrected
Chapter 1	Grounding (HRMG/HRRG) row: the specification allows a floating or high-resistance IT ground. UL row: the specification's UL list. OCP term: title, definition, number and sentence rewritten.	Added · Corrected
Chapter 3.2 box	The specification NVIDIA co-authored already defines a 34.5 kV SST.	Added
Chapter 3.5	New section: what the specification is, a fifteen-row requirements table with what each asks of a vendor, what Revision 0.3.0 leaves open, what the announcement adds, and what it changes for Megmeet.	Added
Chapter 5	5.1 the recommended overload rating; 5.2 the 10 mF per 4 MW DC-link cap; 5.5 the ride-through request written down.	Added
Chapter 6	6.1 box: the empty 34.5 kV row is now a written requirement. 6.2: the two classes and the specification's insulation levels, with the 13.8 kV one above the ANSI 15 kV class.	Added
Chapter 7 table	Notes on the overload, service-life, part-load, NOGRR 282 and MV-in-the-hall rows; the 15-year life is now first-hand. The specification row is rewritten.	Added · Confirmed · Corrected
Chapters 7.2 · 7.4	The specification's compliance list, with no UL 9540; the part-load floor; two of the four "publish first" items now have a buyer's number.	Added
Chapter 8.1	The 13.8 kV against 35 kV inconsistency is settled at product level by the two SKUs; the "80 manufacturers" figure is re-worded from the announcement.	Added · Corrected
Chapter 8, NVIDIA questions	Questions 1–8, 10 and 16 gain the specification's answer. Question 13 is corrected : the specification names Modbus TCP/IP. Question 15 is corrected : the specification sets harmonic and power-factor requirements, so "no OCP harmonic limit" was wrong.	Added · Corrected
Chapter 8, OCI question 3	The medium-voltage UPS definition is now read first-hand.	Confirmed
Chapters 13 · 14 · 15	The class objection gains its sharper form (which SKU?); the ± 400 V row notes the specification is 800 V unipolar; questions 1 and 7 gain the buyers' half of the answer; question 9 is rewritten around Revision 0.4.	Added · Corrected
Chapter 16	16.1 and 16.2 notes; 16.3 gains two contradictions — the NOGRR 282 corner points and the specification's own dates; 16.4 records the OCP block as resolved.	Added · Corrected
Appendices A–D	The glossary entry and the flashcard rewritten; references 85–89 and the SPEC source entry added; a colophon note.	Added · Corrected

Where	What changed	Kind
Data file · figures · companion	The same stale statements corrected in megmeet-sst-briefing-data.json; figures M2 and M11 regenerated from it; the companion re-inlined and taught the Spec tier. Figures cannot carry a highlight, so they are listed here instead.	Corrected
What did not change. The ledger in chapter 6 and figures M6, M7 and M12 still record what each vendor has <i>shown</i> , and the specification changes none of that; Megmeet's service-voltage class remains undisclosed . The two source documents are not stored in the repository.		

Developed by: LightAISolutions